

Fifty Years of MIMO Detection: The Road to Large-Scale MIMOs

Shaoshi Yang, *Member, IEEE* and Lajos Hanzo, *Fellow, IEEE*

Abstract—The emerging massive/large-scale multiple-input multiple-output (LS-MIMO) systems that rely on very large antenna arrays have become a hot topic of wireless communications. Compared to multi-antenna aided systems being built at the time of writing, such as the long-term evolution (LTE) based fourth generation (4G) mobile communication system which allows for up to eight antenna elements at the base station (BS), the LS-MIMO system entails an unprecedented number of antennas, say 100 or more, at the BS. The huge leap in the number of BS antennas opens the door to a new research field in communication theory, propagation and electronics, where random matrix theory begins to play a dominant role. Interestingly, LS-MIMOs also constitute a perfect example of one of the key philosophical principles of the Hegelian Dialectics, namely that “quantitative change leads to qualitative change”.

In this treatise, we provide a recital on the historic heritages and novel challenges facing LS-MIMOs from a detection perspective. Firstly, we highlight the fundamentals of MIMO detection, including the nature of co-channel interference (CCI), the generality of the MIMO detection problem, the received signal models of both linear memoryless MIMO channels and dispersive MIMO channels exhibiting memory, as well as the complex-valued versus real-valued MIMO system models. Then, an extensive review of the representative MIMO detection methods conceived during the past fifty years (1965-2015) is presented, and relevant insights as well as lessons are inferred for the sake of designing complexity-scalable MIMO detection algorithms that are potentially applicable to LS-MIMO systems. Furthermore, we divide the LS-MIMO systems into two types, and elaborate on the distinct detection strategies suitable for each of them. The type-I LS-MIMO corresponds to the case where the number of active users is much smaller than the number of BS antennas, which is currently the mainstream definition of LS-MIMO. The type-II LS-MIMO corresponds to the case where the number of active users is comparable to the number of BS antennas. Finally, we discuss the applicability of existing MIMO detection algorithms in LS-MIMO systems, and review some of the recent advances in LS-MIMO detection.

Index Terms—Co-channel interference (CCI), equalization, large-scale/massive MIMO, multiuser detection, MIMO detection.

GLOSSARY

3G	third generation.
4G	fourth generation.
5G	fifth generation.
A-CPDA	approximate complex-valued probabilistic data association.

ACO	ant colony optimization.
AME	asymptotic-multiuser-efficiency.
APP	<i>a posteriori</i> probability.
ASIC	application-specific integrated circuit.
AWGN	additive white Gaussian noise.
BALM	block alternating likelihood maximization.
BC-SDPR	bound-constrained semidefinite programming relaxation.
BER	bit-error rate.
BI-GDFE	block-iterative generalized decision feedback equalizer.
BLER	block-error rate.
BP	belief propagation.
BPSK	binary phase-shift keying.
BS	base station.
CAGR	compound annual growth rate.
CCI	co-channel interference.
CDM	code-division multiplexing.
CDMA	code-division multiple-access.
CLPS	closest lattice-point search.
CMOS	complementary metal-oxide semiconductor.
CPDA	complex-valued probabilistic data association.
DFD	decision-feedback detector.
DS-CDMA	direct-sequence code-division multiple-access.
DSNR	decreasing signal-to-noise ratio.
EB	exabytes.
EM	expectation-maximization.
EXIT	extrinsic information transfer.
FCSD	fixed-complexity sphere decoding/decoder.
FDM	frequency-division multiplexing.
FDMA	frequency-division multiple-access.
FEC	forward-error-correction.
FER	frame-error rate.
FH-CDMA	frequency-hopped code-division multiple-access.
FIR	finite impulse response.
GA	genetic algorithm.
GSNR	greatest signal-to-noise ratio.
HNN	Hopfield neural network.
IAI	interantenna interference.
IC	integrated circuit.
ICI	interchannel interference.
IDD	iterative detection and decoding.
IMSE	increasing mean-square error.
ISI	intersymbol interference.
JPDA	joint probabilistic data association.
LAS	likelihood ascent search.
LDPC	low-density parity-check.
LLL	Lenstra-Lenstra-Lovász.
LMSE	least mean-square error.
LR	lattice-reduction.
LS	least-squares.
LS-MIMO	large-scale multiple-input multiple-output.
LSD	list sphere decoding.
LTE	long-term evolution.
LTE-A	Long Term Evolution-Advanced.
M2M	machine-to-machine.
MAI	multiple-access interference.
MAME	maximum asymptotic-multiuser-efficiency.
MAP	maximum <i>a posteriori</i> .
MBER	minimum bit error rate.
MC-CDMA	multicarrier code-division multiple-access.
MED	minimum Euclidean distance.
MF	matched filter.
MFB	matched filter bound.
MFSK	multiple frequency-shift keying.

The financial support of the Research Councils UK (RCUK) under the India-UK Advanced Technology Center (IU-ATC), of the EU under the auspices of the Concerto project, and of the European Research Councils Advanced Fellow Grant is gratefully acknowledged.

The authors are with the School of Electronics and Computer Science, University of Southampton, Southampton, SO17 1BJ, UK (e-mail: {lh, shaoshi.yang}@ecs.soton.ac.uk).

MGS	mixed Gibbs sampling.
MIC	multistage interference cancellation.
ML	maximum likelihood.
MMF	multimode fibre.
MMSE	minimum mean-square error.
MR	multiple restart.
MS	mobile station.
MSDSD	multiple symbol differential sphere decoder.
MSE	mean-square error.
MSI	multiple-stream interference.
MUD	multiuser detection/detector.
MUI	multiuser interference.
NP-complete	nondeterministic polynomial-time complete.
NP-hard	nondeterministic polynomial-time hard.
OFDM	orthogonal frequency-division multiplexing.
OSIC	ordered successive interference cancellation.
PAM	pulse-amplitude modulation.
PDA	probabilistic data association.
PDF	probability density function.
PER	packet-error rate.
PI-SDPR	polynomial-inspired semidefinite programming relaxation.
PIC	parallel interference cancellation.
PSK	phase-shift keying.
PSO	particle swarm optimization.
QAM	quadrature amplitude modulation.
QPSK	quadrature phase-shift keying.
QRD	QR-decomposition.
R-MCMC	randomized Markov chain Monte Carlo.
RPDA	real-valued probabilistic data association.
RS	randomized search.
RTS	reactive tabu search.
SA	simulated annealing.
SD	sphere decoding/decoder.
SDM	space-division multiplexing.
SDMA	space-division multiple-access.
SDP	semidefinite programming.
SDPR	semidefinite programming relaxation.
SE	Schnorr-Euchner.
SER	symbol-error rate.
SIC	successive interference cancellation.
SINR	signal-to-interference-plus-noise ratio.
SIR	signal-to-interference ratio.
SNR	signal-to-noise ratio.
STBC	space-time block code/coded.
SUMF	single-user matched filter.
SUMIS	subspace marginalization aided interference suppression.
TDM	time-division multiplexing.
TDMA	time-division multiple-access.
UEP	unequal error protection.
VA-SDPR	virtually antipodal semidefinite programming relaxation.
VB	Viterbo-Boutros.
VB-LAST	vertical Bell Laboratories layered space-time.
VER	vector-error rate.
VLSI	very-large-scale integration.
VNI	visual network index.
WLS	weighted least-squares.
ZF	zero-forcing.

I. INTRODUCTION

A. Why are Large-Scale MIMOs Important?

The multimedia data traffic conveyed by the global mobile networks has been soaring [1]–[5], and this trend is set to continue, as indicated by Cisco’s visual networking index (VNI) forecast [6], [7]. More specifically,¹ the global mobile data traffic grew 81% in 2013, up from 0.82 exabytes (EB), i.e. 0.82×10^{18} bytes per month at the end of 2012 to 1.5 EB per month at the end of 2013; furthermore, as predicted in Fig. 1, it will increase nearly 11-fold between 2013 and 2018, which translates to a compound annual growth rate

¹Fig. 1 and Fig. 2 are reprinted from the Cisco VNI white paper [6], with permission of Cisco.

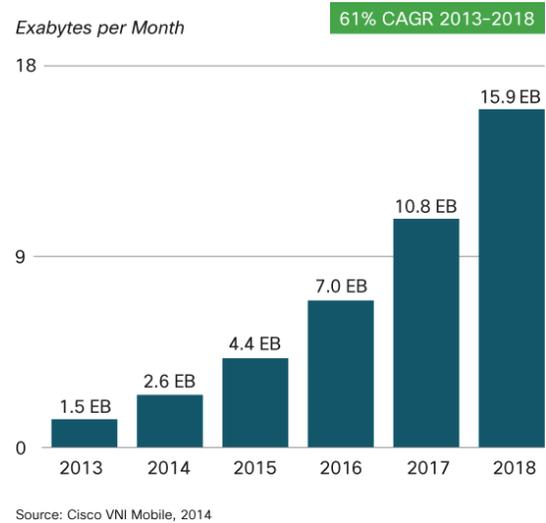


Fig. 1. Cisco VNI: global mobile data traffic forecast, 2013-2018.

(CAGR) of 61% for the period spanning from 2013 to 2018, reaching 15.9 EB per month by 2018 [6], [7]. As seen from Fig. 2, this explosive growth is mainly fuelled by the prevalence of smartphones, laptops and tablets, as well as by the emergence of machine-to-machine (M2M) communications [8]–[19]. Additionally, the design of wireless communication systems is highly constrained by the paucity of radio spectrum, which is exemplified by the overcrowded frequency allocation chart of the United States [20]. As a consequence of the combined effect of the mobile data traffic growth trend and the scarcity of favorable radio spectrum in the low-loss frequency-range, the forthcoming fifth generation (5G) communication systems have to resort to the employment of massive/large-scale multiple-input multiple-output (LS-MIMO) transmission techniques, which invoke a large number of antenna elements at the transmitter and/or receiver for achieving a high spectral-efficiency [21]–[29] and high energy-efficiency [25], [30]–[32].

A range of other fundamental technologies conceived for 5G communications are closely related to LS-MIMO. For example, both millimetre wave communications [33] and LS-MIMOs may be regarded as enabling techniques facilitating *high-dimensional* physical-layer communication technologies. Their difference is that LS-MIMOs achieve high dimensionality in the spatial domain, while millimetre wave communication systems achieve a high dimensionality in the frequency domain by operating at frequencies ranging from *about* 30 GHz to 300 GHz, which is much higher than the operating frequencies of contemporary third generation (3G)/4G systems (from 450 MHz to 3.5 GHz). Furthermore, owing to the much shorter wavelength, millimetre wave technologies may facilitate compacting a large number of antenna elements in a relatively small space. Additionally, the coverage area of a single cell of millimetre wave communication systems may be significantly smaller than a single cell of 3G/4G systems. As a result, small-cell based heterogeneous network (HetNet) architecture is required. Therefore, as shown in Fig. 3, there is

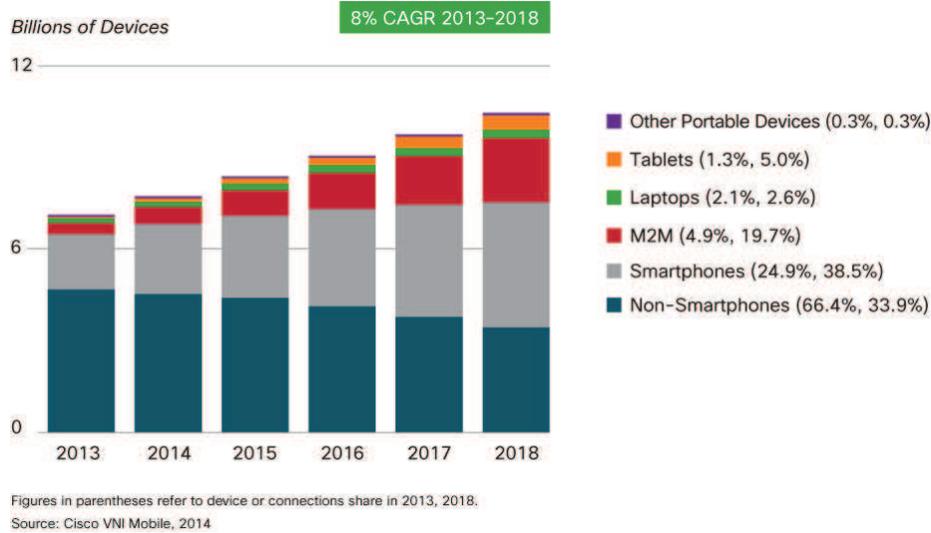


Fig. 2. Cisco VNI: global mobile devices and connections growth forecast, 2013-2018.

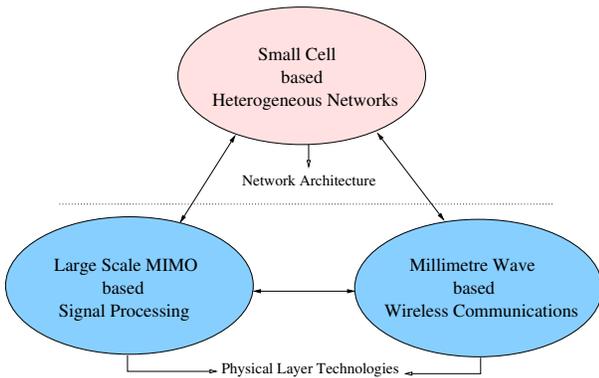


Fig. 3. There is a natural marriage amongst LS-MIMO, millimetre wave, and small-cell based HetNet, which constitute three fundamental technologies for 5G wireless communications.

a natural marriage amongst LS-MIMO, millimetre wave and small-cell technologies.

B. Why is MIMO Detection Important and Challenging?

As Claude Shannon pointed out, “The fundamental problem of communication is that of reproducing at one point either exactly or approximately a message selected at another point” [34]. Compared to conventional single-input single-output systems, e.g. the single-antenna point-to-point system, in MIMO systems we have multiple interfering messages/symbols transmitted concurrently, and at the receiver these symbols are expected to be detected/decoded subject to the contamination of random noise or interference, as shown in Fig. 4. The multiple symbols may be detected separately or jointly. As opposed to separate detection, in joint detection each symbol

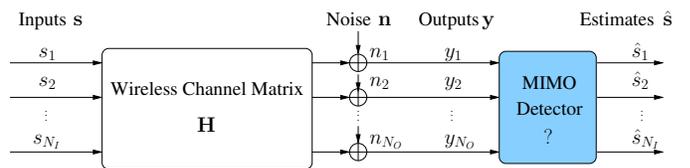


Fig. 4. Conceptual illustration of the MIMO detection problem.

has to be detected taking into account the characteristics of the other symbols. As a beneficial result, typically joint detection is capable of achieving a significantly better performance than separate detection, although joint detection imposes a higher computational complexity.

The joint detection of multiple symbols in MIMO systems is of central importance for the sake of realizing the substantial benefits of various MIMO techniques. This is because the co-channel interference (CCI) routinely encountered in MIMO-based communication systems constitutes a fundamental limiting characteristic [24], [35]–[44]. Unfortunately, the optimum MIMO detection problem was proven non-deterministic polynomial-time hard (NP-hard) [45]–[47], thus all known algorithms conceived for solving the problem optimally have a complexity exponentially increasing with the number of decision variables. As a result, the computational complexity of the optimum maximum-likelihood (ML) criterion or the maximum *a posteriori* (MAP) criterion based MIMO detection algorithms quickly become excessive as the number of decision variables increases. Thanks to the rapid development of the semiconductor industry, the hardware computing power has been dramatically increasing over the years, and in some cases a “not-so-extreme” computational complexity is no longer regarded as a bottleneck of practical applications. However, it should be noted that while transistors get faster and smaller, supply voltages cannot be reduced significantly in modern complementary metal-oxide semiconductor (CMOS) processes. Therefore, virtually all modern integrated circuits

(ICs) encounter an integration density limit owing to the maximum tolerable internal temperature imposed by the excessive power consumption or power density. In other words, this power bottleneck still limits today's IC development. As a consequence, one cannot simply rely on Moore's law, and even modest-complexity MIMO detection algorithms could be too power hungry for battery-powered devices. Hence low-complexity, yet high-performance suboptimum MIMO detection algorithms are needed for practical MIMO applications.

C. The Contributions of This Paper

In this paper, an extensive review of the family of representative MIMO detection methods invented during the past fifty years is presented in a unified mathematical model², although practical MIMO schemes have various subtleties. Our particular focus is on complexity-scalable MIMO detection algorithms potentially applicable to LS-MIMO systems [25]. The algorithms surveyed include the classic linear MIMO detection, the interference-cancellation based MIMO detection, the tree-search based MIMO detection, the probabilistic data association (PDA) based MIMO detection, and the semidefinite programming relaxation (SDPR) based MIMO detection. Several high-quality books or reviews were published on MIMO detection [48]–[52]. They were predominantly dedicated to CDMA systems in the 1990s [48]–[50] or to conventional small-/medium-scale MIMO systems [51], [52], whereas LS-MIMOs just became a hot research topic at the time of writing [25]. On the other hand, they mainly covered the most common suboptimum MIMO detection methods, such as the linear zero-forcing (ZF) detector, the linear minimum mean-square error (MMSE) detector and various interference cancellation based detectors [48]–[51], or focused largely on a single type of MIMO detector [52]. In comparison, there is a paucity of reviews on more advanced MIMO detection methods, such as the tree-search based MIMO detectors (the sphere decoder (SD) constitutes an instance of the tree-search based MIMO detectors) [53]–[82], the lattice-reduction (LR) based MIMO detectors [83]–[103], as well as the PDA [104]–[133] and the SDPR [134]–[147] based detectors etc., although a concise tutorial on some of these detectors was given in [148]. Additionally, most of the existing research on LS-MIMO is focused on the precoding/beamforming based downlink of a special case of LS-MIMO, where one side of the communication link has a significantly higher number of antennas than the other. By contrast, only limited attention has been dedicated to the uplink of general LS-MIMOs. Hence, our goal is to fill these gaps in the open literature. For the sake of clarity, the organization of this paper is shown in Fig. 5.

II. THE NATURE OF CO-CHANNEL INTERFERENCE

To gain profound insights into the intricacies of the MIMO detection problem, let us briefly reflect on the nature of the CCI in this section. The nature of CCI depends on the specific

context. In this paper, it is defined in its most generic form as *the interfering signal imposed by multiple transmissions taking place on channels which are mutually non-orthogonal*. Mathematically, CCI may also be interpreted as interfering signals that span a subspace having a “non-empty” intersection with the subspace spanned by the desired signals. The channel-induced non-orthogonality may be observed in the frequency, time and/or space domain, as shown in Fig. 6. To recover the desired signal at the receiver, the desired signal has to be distinguishable from the interference in *at least* one domain. In the extreme case, if the multiple transmissions are highly non-orthogonal in all domains, then it may become impossible to recover the desired signal by any means.

In essence, the CCI originates from *signal-feature-overlapping* of multiple transmissions. For example, in spectrum-efficient communication systems such as the code-division multiplexing /multiple-access (CDM/CDMA) systems [149]–[151] and the space-division multiplexing /multiple-access (SDM/SDMA) systems [21], [44], [152]–[158], multiple transmissions are often deliberately arranged to take place simultaneously over the same frequency band. These “frequency sharing” and “time sharing” strategies result in a “frequency-overlapping” and a “time-overlapping” phenomenon, respectively. It is worth pointing out that as far as radio waves are concerned, rigorously the CCI always tends to exist in the frequency, time and space domains. For example, when no deliberate frequency-overlapping is arranged, the “frequency-overlapping” is due to the underlying fact that *for all realizable, time-limited radio waveforms, their absolute bandwidth is infinite* [159], [160], as shown in Fig. 7. In other words, *every active radio transmitter has an impact on every operating radio receiver*. Similarly, for a strictly bandwidth-limited signal, its time duration has to be infinite. With respect to the space domain, it is well known that the propagation of electromagnetic energy in free space is determined by the inverse square law [21], [158], [161], i.e. we have $S = P_t/4\pi d^2$, where S is the power per unit area or power spatial density (in Watts per metre-squared) at distance d , and P_t is the total power transmitted (in Watts). Hence, theoretically, the radio signals cannot be stopped, they are only attenuated in the frequency, time and space domains.

In engineering practice, fortunately, by using well-designed filters [162], [163], typically the waveform of the time-limited signal can be shaped so that most energy of the signal can be kept within a given limited frequency-band, and thus the signal energy leakage outside the target frequency-band can be reduced to a sufficiently low level. Similarly, in the space domain, two transmissions taking place at a sufficiently far distance can also be regarded as non-interfering with each other. Therefore, despite the fact that the signal-feature-overlapping in frequency, time and space domains is inevitable from the theoretic point of view, in practical spectrum-efficient systems we can typically assume that the signal-feature-overlapping in these three domains is a result of a *deliberate* design. In this context, *the signals are made as much distinguishable as possible in one domain, and as much overlapping as possible in the remaining domains*. Our task is to recover the desired signal based on this deliberate arrangement.

²This means the algorithms conceived for equalization, multiuser detection and multi-antenna detection are treated under the same umbrella of MIMO detection.

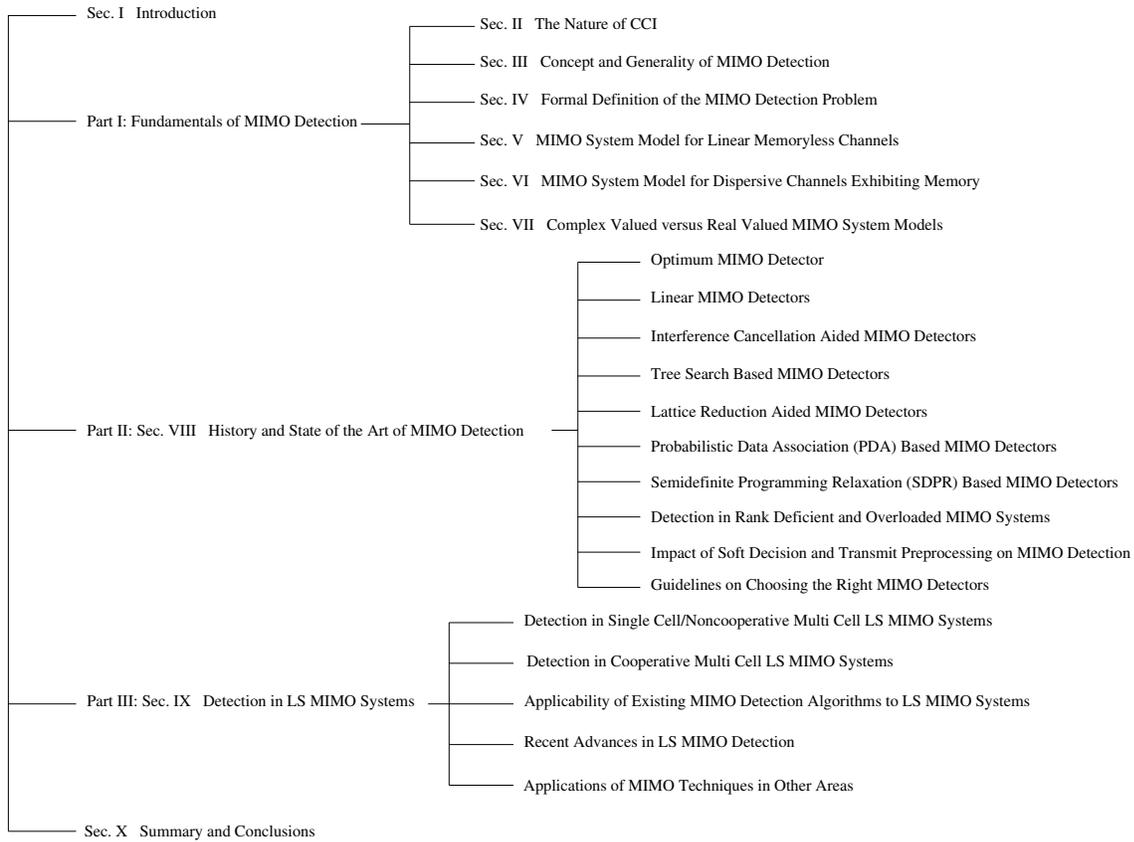


Fig. 5. The organization of this paper.

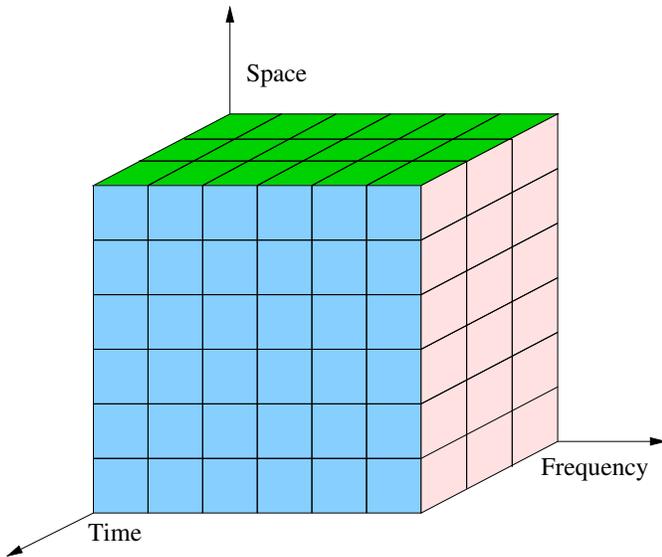


Fig. 6. The multiple signals have to be distinguishable in at least one of the three fundamental domains of time, frequency and space.

Since the frequency, time and space domains represent the fundamental physical features of signal transmission, each of them corresponds to a distinct multiplexing/multiple-access scheme [164], namely the frequency-division multiplexing/multiple-access (FDM/FDMA), time-division multiplexing/multiple-access (TDM/TDMA), and

SDM/SDMA, respectively. It is worth noting that compared to these three fundamental domains, the *spreading code sequences* used in CDM/CDMA systems do *not* constitute an independent domain. This is because the orthogonality of the spreading code sequences is essentially a *special case of time-domain orthogonality*. In systems using spreading codes, in principle we pursue to transmit orthogonal code sequences to minimize the inter-code interference. Although it is mathematically possible to construct perfectly orthogonal code sequences, the orthogonality of these code sequences is typically degraded in practical transmissions [151]. Moreover, since the number of theoretically orthogonal code sequences is rather limited, often quasi-orthogonal code sequences are adopted in practice [151]. Therefore, typically substantial interference is imposed by the non-orthogonality of spreading code sequences in practical CDM/CDMA systems [165].

In analogy to CDM/CDMA, the conventional frequency-division pattern, time-division pattern and space-division pattern can also be regarded as a special case of “spreading codes” in the frequency domain, time domain and space domain, respectively. Note, however, that there exist a certain degree of differences in terms of *their multiplexing/multiple-access resolution* in these three domains. More specifically, in practice, by using guard intervals in the corresponding domain, a good resolution of frequency-division and time-division may be readily maintained – in other words, the orthogonality of “spreading codes” in frequency- and time-division systems may be relatively easy to obtain [164]. By contrast, the

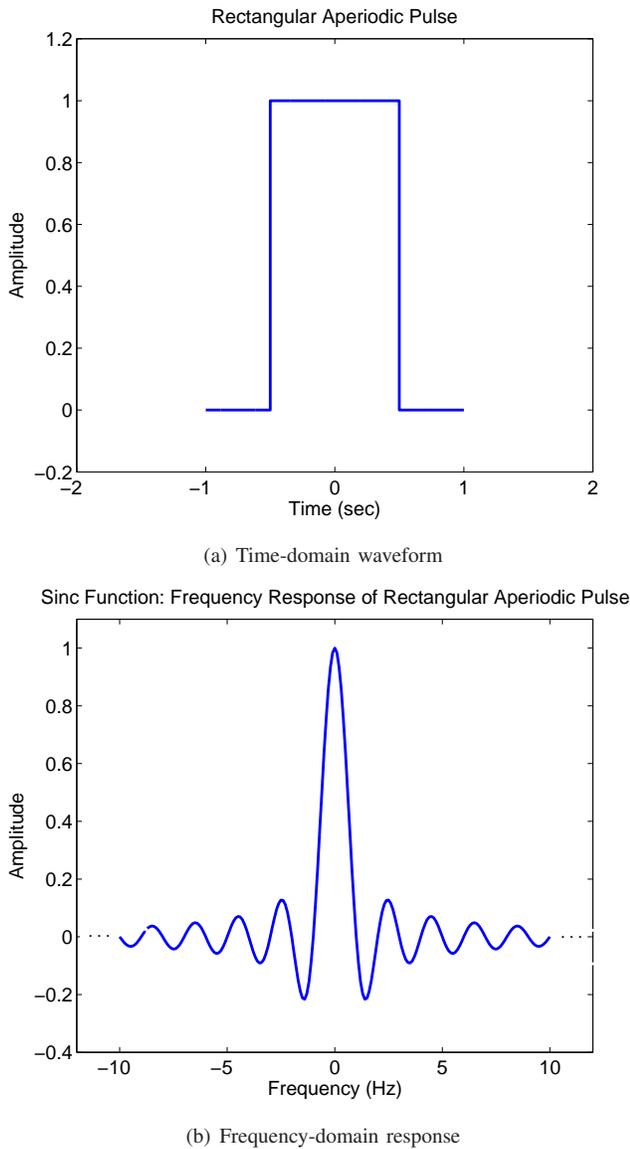


Fig. 7. All realizable, duration-time limited waveforms has a infinite frequency band.

resolution of space-division tends to be undermined by the physical size of transmitters/receivers and by the random propagation channel, hence typically substantial interference is imposed by the non-orthogonality of “spreading codes” in practical space-division systems [21], [44], [152]–[158]. This is similar to the case in CDM/CDMA systems and explains why MIMO detection typically represents a more significant problem in CDM/CDMA systems and SDM/SDMA systems than in FDM/FDMA and TDM/TDMA systems.

In this paper, the CCI considered mainly refers to the interference in SDM/SDMA or CDM/CDMA systems, where multiple transmissions often take place *simultaneously*, or *partially simultaneously* over the same frequency. Depending on specific applications, CCI is often alternatively termed as intersymbol interference (ISI), interchannel interference (ICI), interantenna interference (IAI), multiuser interference (MUI), multiple-access interference (MAI), and multiple-stream inter-

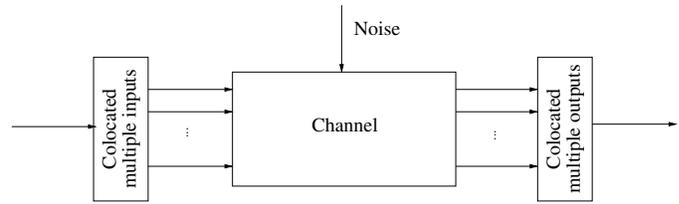


Fig. 8. Point-to-point MIMO channel.

ference (MSI) etc.

III. CONCEPT AND GENERALITY OF MIMO DETECTION

As a family of physical-layer CCI management techniques, MIMO detection deals with the joint detection of several information-bearing symbols transmitted over a communication channel having multiple inputs and multiple outputs. This problem is of *fundamental* importance for modern high-throughput digital communications. Rigorously, the MIMO detection problem arises *if and only if* the respective *subchannels* of the multiple inputs are *not* orthogonal to each other, and hence there exists interference between the outputs. As a *generic* mathematical model, the MIMO detection problem underpins numerous relevant applications, and the physical meaning of the inputs and outputs herein may vary in different contexts. For instance, in single-user SDM-MIMO systems equipped with multiple transmit and receive antennas [166]–[168], the inputs refer to the vector of modulated symbols that are transmitted from multiple *collocated* transmit antennas, while the outputs refer to the vector of received signals recorded at multiple *collocated* receive antennas, as shown in Fig. 8. This is indeed a canonical scenario of investigating MIMO detection algorithms [148]. A second example is the uplink of multiuser multiple-antenna systems [169], [170], where the inputs may be multiple transmitted symbols belonging to a cluster of geographically *distributed* single-antenna mobile stations (MSs), and the outputs may be the signals received at the serving base station (BS) equipped with multiple *collocated* antennas, as shown in Fig. 9. This is actually the so-called SDMA system [21], [44], [152]–[158]. Yet another important example represented by Fig. 9 is the uplink of CDMA systems [48]–[51], where the inputs are the transmitted symbols of distributed single-antenna MSs, and the outputs are typically generated by filtering the signal received at the single-antenna BS with a bank of matched filters (MFs), whose impulse responses are matched to a set of *a priori* known user-signature waveforms.

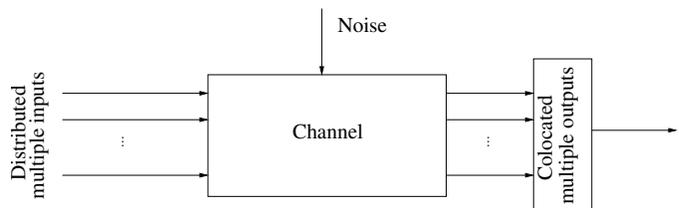


Fig. 9. MIMO multiple-access channel.

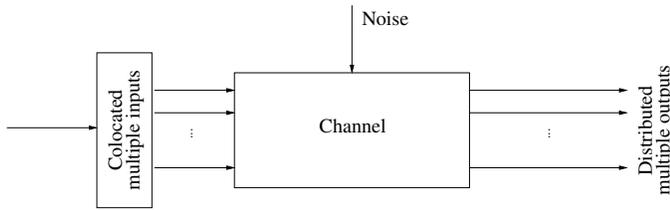
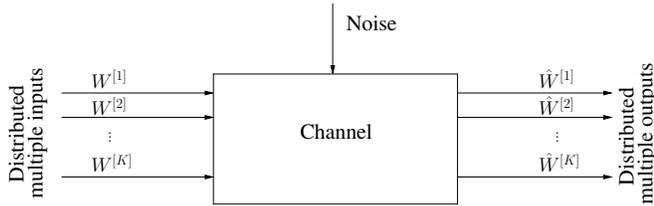


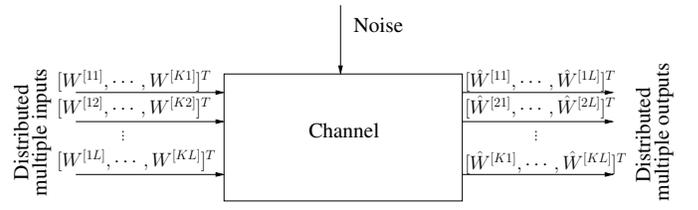
Fig. 10. MIMO broadcast channel, which is not suitable for MIMO detection.

Fig. 11. MIMO interference channel, where $W^{[k]}$ represents the message that originates at transmitter i and is intended for its dedicated receiver i , while $\hat{W}^{[i]}$ denotes the recovered version of $W^{[k]}$, $k = 1, \dots, K$.

Here, it should be emphasized that whether the multiple inputs and/or the multiple outputs are “collocated or not is extremely important in determining the signal processing techniques to be used. If multiple inputs/outputs are collocated, the *cooperative joint encoding/decoding* of the inputs/outputs can be conducted [21], [44], [158], [171]–[177], which renders joint MIMO transmission/detection feasible. For example, the single-user MIMO system shown in Fig. 8 has both its transmit and receive antennas collocated, hence it enjoys the privilege of performing both joint encoding and joint decoding. As a benefit, both simultaneous transmission and simultaneous reception can be attained relatively simply. By contrast, the multiple-access MIMO system of Fig. 9 is typically not capable of joint encoding at the user side, hence the uplink transmissions of both CDMA and SDMA systems are *asynchronous* by nature.

Additionally, as far as the downlink of multiuser MIMO systems, namely the multiuser MIMO broadcast channel of Fig. 10 is concerned, typically most of the sophisticated signal processing tasks are conducted in the form of transmit preprocessing (i.e. precoding) at the BS, where collocated inputs are available for cooperative joint encoding [178]–[183]. As a result, detection at the user becomes *less* challenging. Since the investigation of MIMO transmit preprocessing techniques is beyond the scope of this paper, we will not elaborate on it in the sequel.

Finally, when both the transmitters and the receivers are geographically distributed, the MIMO channel turns into either an *interference channel* [184]–[192] or an *X channel* [193]–[196], which are shown in Fig. 11 and Fig. 12, respectively. An interference channel characterizes a situation where each transmitter, potentially equipped with multiple antennas, only wants to communicate with its dedicated receiver, and each receiver, possibly equipped with multiple antennas as well, only cares about the information arriving from the corresponding transmitter. There is a *strict one-to-one correspondence* between the multiple transmitters and the multiple receivers.

Fig. 12. MIMO X channel, where $W^{[kl]}$ represents the message that originates at transmitter l and is intended for receiver k , while $\hat{W}^{[kl]}$ denotes the recovered version of $W^{[kl]}$, $k = 1, \dots, K$, $l = 1, \dots, L$.

Therefore, each transmission link interferes with the others. By comparison, in the MIMO X channel relying on L transmitters and K receivers, each transmitter has an independent message for each receiver. Hence, there are a total of KL independent messages to deliver. The MIMO X channel is a more generalized model, which encompasses the MIMO multiple access channel of Fig. 9, the MIMO broadcast channel of Fig. 10 and the MIMO interference channel of Fig. 11 as its special cases. Despite their difference, the MIMO interference channel and X channel share a key common feature, namely they both have distributed transmitters and receivers. The *distributed nature* of transmitters and receivers makes the signal processing required for mitigating the detrimental effects of the MIMO interference channel and X channel far more challenging compared to the single-user MIMO channel. In fact, the capacity analysis and the signal processing techniques for MIMO interference channel and X channel still constitute a largely open field, and most of existing efforts have aimed for *transforming* the MIMO interference channel and X channel so that *cooperation* at the transmitter/receiver side can be exploited to some degree, at least in some specific scenarios. For example, in multicell systems, *BS cooperation* [131], [181], [197]–[206], also known as *joint multicell processing* [24], [181], has been advocated for the sake of transforming the MIMO interference channel and X channel to a number of cooperative multiuser MIMO channels. Additionally, the recent advances in the capacity analysis of the MIMO interference channel and X channel have stimulated significant interests in *interference alignment* [194], [195], [195], [196], [207]–[212], which is essentially constituted by a family of precoding/beamforming techniques for the MIMO interference channel and X channel. The problems related to interference alignment are also beyond the scope of this paper and will not be discussed in detail.

IV. FORMAL DEFINITION OF THE MIMO DETECTION PROBLEM

Despite the fact that similar problems have been known for a while [46], [50], [51], [213]–[248], the term “MIMO detection” became widespread mainly with the advent of

multiple-antenna techniques during the mid-1990s³ [152]–[156], [166]–[168], [249]–[260]. As a result, in the narrow sense, MIMO detection usually refers to the symbol detection problem encountered in narrow-band SDM based multiple-antenna systems, such as the vertical Bell Laboratories layered space-time (VBLAST) system [166]–[168]. However, we emphasize that as a family of important signal processing techniques, MIMO detection should be interpreted based on a generic mathematical model, as detailed below.

In the generic sense, the MIMO detection problem can be defined for an N_I -input linear system whose transfer function is described by a matrix having *non-orthogonal columns* and its N_O outputs are contaminated by additive random noise. Note that the noise does not necessarily obey the Gaussian distribution. The multiple inputs can be denoted as a vector \mathbf{s} , which is randomly drawn from the set \mathbb{A}^{N_I} composed by N_I -element vectors, whose components are from a finite set $\mathbb{A} = \{a_m | m = 1, \dots, M\}$ and the *a priori* probability of selecting each vector from \mathbb{A}^{N_I} is identical. The set \mathbb{A} is usually referred to as the constellation alphabet, whose elements can take either real or complex values. Additionally, $\underline{\mathbf{s}}_n$, $n = 1, \dots, M^{N_I}$, represents the realizations of \mathbf{s} , hence they are the elements of \mathbb{A}^{N_I} . Then the relationship between the inputs and the outputs of this linear system can be characterized by

$$\mathbf{y} = \mathbf{H}\mathbf{s} + \mathbf{n}, \quad (1)$$

where $\mathbf{y} \in \mathbb{F}^{N_O}$ is the received signal vector, $\mathbf{H} \in \mathbb{F}^{N_O \times N_I}$ is the transfer function/channel matrix of the system, and $\mathbf{n} \in \mathbb{F}^{N_O}$ represents the additive random noise vector. Depending on the specific applications considered, \mathbb{F} can be either the field of real numbers, \mathbb{R} , or the field of complex numbers, \mathbb{C} . Concisely speaking, any system having multiple inputs, multiple outputs and subject to additive random noise can be regarded as a MIMO system, but the MIMO detection problem considered herein is only confronted in MIMO systems whose channel matrix is non-orthogonal in columns. It is worth noting that the constellation alphabet \mathbb{A} , the number of inputs N_I and the number of outputs N_O are typically regarded as constant quantities⁴ for a given system. Hence, they are assumed to be known by default, although this will not be explicitly emphasized, unless necessary. As a further note, when the input symbol vectors of multiple consecutive time slots are associated with each other via space-time coding [253]–[261], the MIMO system model is given by

$$\mathbf{Y} = \mathbf{H}\mathbf{C} + \mathbf{N}, \quad (2)$$

where \mathbf{Y} is a matrix denoting the signal received in multiple

time slots, \mathbf{C} is a matrix representing the space-time codeword, and \mathbf{N} is the corresponding noise matrix. We can obtain (1) from (2) by setting the number of time slots considered to one. In this regard, (2) is more general than (1). However, (2) is mainly used for characterizing space-time coding aided MIMO systems, where typically the MIMO detection problem defined in this paper does not exist. This is because the optimal ML decoding can be simply implemented using the separate symbol-by-symbol decoding strategy [for orthogonal space-time block codes (STBCs)] or the pairwise decoding strategy (for quasi-orthogonal STBCs) [261]. Therefore, in most cases associated with MIMO detection, we rely on the system model (1).

Based on the generic mathematical model of (1), *the basic task of MIMO detection is to estimate the input vector \mathbf{s} relying on the knowledge of the received signal vector \mathbf{y} and the channel matrix \mathbf{H}* . Note that for \mathbf{y} , typically its exact value has to be known, while for \mathbf{H} , sometimes only the knowledge of its statistical parameters is available. To elaborate a little further, if the *instantaneous* value of \mathbf{H} is known from *explicit* channel estimation, the detection of \mathbf{s} is said to rely on *coherent* detection. By contrast, if the explicit estimation of the instantaneous channel state is avoided, the detection of \mathbf{s} belongs to the family of *noncoherent* detection schemes. In the latter case, the channel estimation is either performed implicitly in signal detection, or it is completely avoided, whereas typically the statistical knowledge of the channel matrix \mathbf{H} is invoked for supporting signal detection. Additionally, the noncoherent MIMO detection schemes usually require that the input symbols are subject to some form of *differential encoding*, which imposes correlation on the input symbols, and as a result, typically a *block-by-block based sequence detection* has to be employed. This is the so-called multiple-symbol differential detection [261]–[270], which usually leads to higher computational complexity than the symbol-by-symbol based detectors of coherent MIMO systems. Moreover, the noncoherent detectors typically exhibit degraded power efficiency, which results in an inherent performance loss compared to their coherent counterparts, unless the block size is sufficiently large. Therefore, we have to consider the performance-versus-complexity tradeoff in choosing the proper block size. However, similar to the coherent detection of STBCs, there exist simple symbol-by-symbol or pairwise noncoherent detection schemes [263], [264] for differential space-time modulation. As a result, the decoding complexity of the differential space-time modulation increases linearly, instead of exponentially, with the number of antennas [261]. In this paper, we focus our attention on coherent MIMO detection. Then, from the perspective of mathematical mapping, a coherent MIMO detector is defined as:

$$\hat{\mathbf{s}} = \mathcal{D}(\mathbf{y}, \mathbf{H}) : \mathbb{F}^{N_O} \times \mathbb{F}^{N_O \times N_I} \mapsto \mathbb{A}^{N_I}, \quad (3)$$

where $\hat{\mathbf{s}}$ is the estimate of \mathbf{s} .

V. MIMO SYSTEM MODEL FOR LINEAR MEMORYLESS CHANNELS

Bearing in mind specific applications, the system model of (1) may be established either in the time domain or in the

³Note that the first multi-antenna based MIMO system was attributed to a patent granted to Paulraj and Kailath in 1994 [249]. Gerlach [153], Roy [152], [155] and Ottersten [152], [154] initiated the earliest research on SDMA systems. The earliest contribution demonstrating the huge capacity of multi-antenna based MIMO systems may be attributed to Telatar [250], [251], as well as Foschini [166], [252] and Gans [252], followed by other members of the team at Bell Labs [167], [168]. On the other hand, Tarokh, Jafarkhani, Calderbank, Naguib *et al.* [253]–[259] as well as Alamouti [260] are pioneers of space-time code design.

⁴However, in an adaptive system both the constellation alphabet \mathbb{A} and the number of inputs N_I might be varying. But this adaptation is typically constrained by a discrete size-limited codebook.

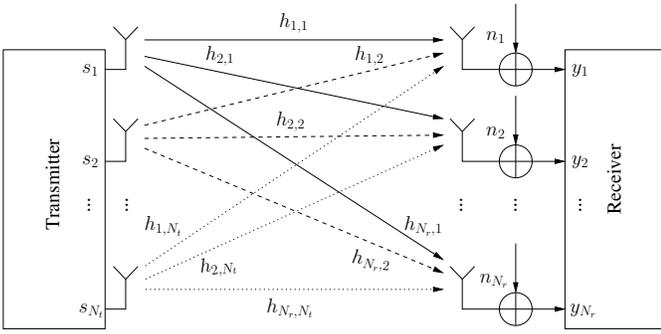


Fig. 13. Schematic of VBLAST-style SDM-MIMO systems communicating over flat fading channels.

frequency domain, and may be applied to both memoryless channels and dispersive channels exhibiting memory [21], [44], [50], [51], [158], [248]. With respect to linear memoryless MIMO channel, a canonical example is the narrowband single-carrier synchronous VBLAST-style SDM-MIMO system [166]–[168] communicating over flat fading channels, as shown in Fig. 13. Because the system's outputs at the current time interval are independent of the system's inputs at previous time intervals, its baseband equivalent discrete-time (i.e. sampled) system model, representing an instance of the generic model (1), can be written as

$$\begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_{N_r} \end{bmatrix} = \begin{bmatrix} h_{1,1} & h_{1,2} & \cdots & h_{1,N_t} \\ h_{2,1} & h_{2,2} & \cdots & h_{2,N_t} \\ \vdots & \vdots & \ddots & \vdots \\ h_{N_r,1} & h_{N_r,2} & \cdots & h_{N_r,N_t} \end{bmatrix} \begin{bmatrix} s_1 \\ s_2 \\ \vdots \\ s_{N_t} \end{bmatrix} + \begin{bmatrix} n_1 \\ n_2 \\ \vdots \\ n_{N_r} \end{bmatrix}. \quad (4)$$

In this specific application, we have $N_t = N_I$ and $N_r = N_O$, which represent the number of transmit and receive antennas, respectively. Furthermore, $h_{j,i}$ denotes the (complex-valued) impulse response between the i th transmit antenna and the j th receive antenna, with $i = 1, 2, \dots, N_t$ and $j = 1, 2, \dots, N_r$. Another example is the multiple-antenna aided orthogonal frequency-division multiplexing (OFDM) system [270] communicating over frequency-selective channels, where each subcarrier subjected to a specific frequency-domain attenuation is narrowband and the model (4) applies to each subcarrier. Notably, for this linear memoryless MIMO channel, the *one-shot detection* which relies only on a single received signal vector $\mathbf{y} = [y_1, y_2, \dots, y_{N_r}]^T$ is adequate. Additionally, for the sake of fair comparison with the single-input single-output systems, typically the energy normalization of $\mathcal{E}(s_i) = 1$ or $\mathcal{E}(\mathbf{s}) = 1$ is imposed on the transmitted symbols.

VI. MIMO SYSTEM MODEL FOR DISPERSIVE CHANNELS EXHIBITING MEMORY

On the other hand, when considering the stand-alone wideband VBLAST system⁵ communicating over frequency-selective MIMO channels [112], [271]–[274], the link between each input-output pair may be modelled by a linear finite impulse response (FIR) dispersive channel, whose sampled version can be denoted as the (possibly complex-valued) vector $\mathbf{h}_{j,i} = (h_{j,i}^0, h_{j,i}^1, \dots, h_{j,i}^{L-1})^T$. Here L is the maximum number of multipath components in each link, and it is also known as the channel memory length. In this case, the *one-shot detection* which utilizes a single N_r -element received signal vector is not optimal. Instead, the *sequence detection* using multiple N_r -element received vectors has to be used.

We assume that a block-based transmission structure relying on zero-padding for eliminating the interblock interference is used, which is beneficial for alleviating the performance degradation imposed by noise enhancement or error propagation [275]. Following zero-padding, a transmission block becomes a frame which occupies $K = N + P$ sampling intervals, where N is the number of sampling intervals occupied by information-bearing symbol vectors in the frame, while $P \geq L - 1$ represents the number of sampling intervals during which P consecutive N_t -element zero vectors are inserted at the tail of the frame. Here we set $P = L - 1$. Given the above-mentioned transmitted frame, the entire received signal vector may be generated by a concatenation of K noise-contaminated sampled received signal vectors, namely, $\mathbf{y} = (\mathbf{y}^T[0], \mathbf{y}^T[1], \dots, \mathbf{y}^T[K-1])^T$, where $\mathbf{y}[k] = (y_1[k], y_2[k], \dots, y_{N_r}[k])^T$ represents the N_r outputs at the k th sampling instant, $k = 0, 1, \dots, K-1$. Then, the baseband signal received by the j th receive antenna at the k th sampling instant is given by

$$y_j[k] = \sum_{i=1}^{N_t} \sum_{l=0}^{L-1} h_{j,i}^l s_i[k-l] + n_j[k], \quad (5)$$

where $h_{j,i}^l$, the l th element of $\mathbf{h}_{j,i}$, $l = 0, 1, \dots, L-1$, denotes the channel gain of the l th path between the i th transmit antenna and the j th receive antenna. Furthermore, $s_i[k]$ is the symbol transmitted from the i th transmit antenna at the k th sampling instant, and $n_j[k]$ represents the noise imposed on the j th receive antenna at the k th sampling instant. Similar to $\mathbf{y}[k]$, we define $\mathbf{s}[k] = (s_1[k], s_2[k], \dots, s_{N_t}[k])^T$ and $\mathbf{n}[k] = (n_1[k], n_2[k], \dots, n_{N_r}[k])^T$. Additionally, similar to \mathbf{y} , we may construct $\mathbf{s} = (\mathbf{s}^T[0], \mathbf{s}^T[1], \dots, \mathbf{s}^T[N-1])^T$ and $\mathbf{n} = (\mathbf{n}^T[0], \mathbf{n}^T[1], \dots, \mathbf{n}^T[K-1])^T$. Then, the received signal corresponding to a transmitted frame can also be written following the matrix notation of (1), where the size of \mathbf{y} and \mathbf{n} is $N_O = KN_r = (N+L-1)N_r$, while that of \mathbf{s} is $N_I = NN_t$, and the MIMO channel matrix \mathbf{H} exhibits the banded Toeplitz

⁵The multicarrier techniques such as OFDM are not used in this system.

structure [275] of:

$$\mathbf{H} = \begin{bmatrix} \mathbf{H}^0 & \mathbf{0} & \cdots & \mathbf{0} \\ \vdots & \mathbf{H}^0 & \ddots & \vdots \\ \mathbf{H}^{L-1} & \vdots & \ddots & \mathbf{0} \\ \mathbf{0} & \mathbf{H}^{L-1} & \ddots & \mathbf{H}^0 \\ \vdots & \vdots & \ddots & \vdots \\ \mathbf{0} & \mathbf{0} & \cdots & \mathbf{H}^{L-1} \end{bmatrix}, \quad (6)$$

whose dimension is $(KN_r \times NN_t)$, and each entry \mathbf{H}^l of (6) is an $(N_r \times N_t)$ -element matrix containing the channel gains between all pairs of transmit and receive antennas for the l th path, i.e. we have

$$\mathbf{H}^l = \begin{bmatrix} h_{1,1}^l & h_{1,2}^l & \cdots & h_{1,N_t}^l \\ h_{2,1}^l & h_{2,2}^l & \cdots & h_{2,N_t}^l \\ \vdots & \vdots & \cdots & \vdots \\ h_{N_r,1}^l & h_{N_r,2}^l & \cdots & h_{N_r,N_t}^l \end{bmatrix}. \quad (7)$$

It is worth noting that the linear memoryless MIMO model and the linear MIMO model exhibiting memory may also be used for characterizing the family of *synchronous* and *asynchronous* CDMA systems, respectively. Additionally, the asynchronous CDMA systems can also be characterized by (1) in the z domain [50].

VII. COMPLEX-VALUED VERSUS REAL-VALUED MIMO SYSTEM MODEL

As we mentioned in Section IV, the generic MIMO system model of (1) can be defined both in the field of real numbers, \mathbb{R} , and in the field of complex numbers, \mathbb{C} . Since the complex-valued modulation constellations, such as quadrature amplitude modulation (QAM) and phase-shift keying (PSK), are often employed in digital communications, the complex-valued MIMO system model is typically a natural and more concise choice for the formulation and performance analysis of the algorithms considered.

The complex-valued and the real-valued MIMO system models are often mutually convertible. More specifically, if we assume that the generic MIMO system model of (1) is defined in \mathbb{C} , and assume that the real part and the imaginary part of \mathbf{s} are uncorrelated,⁶ then the complex-valued MIMO system model of (1) can be transformed to an equivalent real-valued system model of

$$\tilde{\mathbf{y}} = \tilde{\mathbf{H}}\tilde{\mathbf{s}} + \tilde{\mathbf{n}}, \quad (8)$$

$$\text{where } \tilde{\mathbf{y}} = \begin{bmatrix} \Re(\mathbf{y}) \\ \Im(\mathbf{y}) \end{bmatrix}, \tilde{\mathbf{s}} = \begin{bmatrix} \Re(\mathbf{s}) \\ \Im(\mathbf{s}) \end{bmatrix}, \tilde{\mathbf{n}} = \begin{bmatrix} \Re(\mathbf{n}) \\ \Im(\mathbf{n}) \end{bmatrix}, \text{ and } \tilde{\mathbf{H}} = \begin{bmatrix} \Re(\mathbf{H}) & -\Im(\mathbf{H}) \\ \Im(\mathbf{H}) & \Re(\mathbf{H}) \end{bmatrix}.$$

⁶For rectangular QAM, this uncorrelatedness assumption is almost always adopted for ease of decoding, even in single-input single-output systems. In channel-coded systems, where the channel codes may introduce correlation between the coded bits. However, in such systems, typically an interleaver is invoked after the encoder, which mitigates the correlation.

However, the above real-valued decomposition is only applicable to MIMO systems employing real-valued constellations or rectangular QAM constellations (but not for PSK, star QAM [276]–[279] and near-Gaussian constellations [280], [281] etc.), which severely limits its applicability. Furthermore, in many applications, complex-valued operations are more efficient for hardware implementation. The reason for this fact is twofold. Firstly, decomposing an $(N_t \times N_r)$ -element MIMO system into a real-valued system requires storage of the $(2N_r \times 2N_t)$ -element real-valued channel matrix $\tilde{\mathbf{H}}$, which is twice larger than having $2N_t N_r$ real-valued elements that would be needed for a standard representation of the original complex-valued channel matrix \mathbf{H} . Secondly, implementing complex-valued arithmetics in hardware (e.g. very-large-scale integration (VLSI) based circuits) is straightforward and does not result in more complex hardware. For example, a complex-valued multiplier can be built using 4 real multipliers and 2 real adders, because we have $(a + jb)(c + jd) = ac - bd + j(ad + bc)$, or using 3 real multiplications and 5 real additions, because alternatively we have $(a + jb)(c + jd) = ac - bd + j[(a + b)(c + d) - ac - bd]$, which is known as the Gaussian technique of multiplying complex numbers [282]. As a result, the complex-valued model imposes a lower silicon complexity than that required by the real-valued decomposition based model. Therefore, in many cases the real-valued decomposition can be detrimental and hence MIMO detector designers are typically in favor of the complex-valued system model, owing to its flexibility concerning the choice of constellations and its efficiency in VLSI implementations.

On the other hand, the real-valued MIMO system model may also enjoy some advantages, such as the increased *freedom of manipulation* in signal processing. To elaborate a little further, as far as the achievable performance is concerned, in most cases signal processing algorithms based on the complex-valued model of (1) and the real-valued MIMO system model of (8) deliver an equivalent performance. For example, [251] showed the equivalence between the complex-valued and the real-valued MIMO system models in the derivation of the optimal ML detector and the MIMO channel capacity. However, this equivalence does not always hold. For example, it was shown in [283] that the real-valued VBLAST detector outperforms its complex-valued counterpart, owing to its additional freedom in selecting the optimum detection ordering. Hence, a beneficial performance gain may be gleaned from transforming the complex-valued system model to the double-dimensional real-valued system model. This is also true for the tree-search based MIMO detectors, which will be introduced in Section VIII-D, when they invoke symbol detection ordering. More generally, the key insight inferred here is that for all MIMO detection algorithms whose performance is related to detection ordering, the real-valued system model based formulation is capable of providing a better performance than its complex-valued counterpart. This gain is achieved at the expense of extra redundancy in storage of the channel matrix $\tilde{\mathbf{H}}$, and if the symbol detection ordering technique is invoked, this redundancy cannot be avoided.

Additionally, it is worth noting that the real-valued formulation of the complex-valued MIMO system model is *not* unique.

For example, a pairwise real-valued MIMO system model was used in [284], [285], which was shown to result in a reduced complexity compared to the conventional real-valued MIMO system model of (8). A more comprehensive investigation of the complex-valued versus real-valued MIMO detectors was presented in [286].

Finally, we emphasize that if the complex-valued random signals considered are *improper* or *noncircular*, the more advanced complex-valued signal processing techniques of [287]–[289] that rely on additional statistics and tools for fully characterizing the complex-valued random signals have to be used. More specifically, for a complex-valued random vector \mathbf{x} , in addition to the conventional covariance matrix of

$$\mathbf{C}_{xx} = \mathcal{E}[(\mathbf{x} - \boldsymbol{\mu}_x)(\mathbf{x} - \boldsymbol{\mu}_x)^H], \quad (9)$$

another second-order statistic, namely the pseudo-covariance matrix defined as

$$\bar{\mathbf{C}}_{xx} = \mathcal{E}[(\mathbf{x} - \boldsymbol{\mu}_x)(\mathbf{x} - \boldsymbol{\mu}_x)^T], \quad (10)$$

has to be introduced for fully describing the complex-valued random vector. For a proper complex-valued random vector, the pseudo-covariance matrix vanishes, which is formulated as $\bar{\mathbf{C}}_{xx} = \mathbf{0}$. This results in the fact that for a proper complex-valued random scalar, the real and imaginary parts must have the same variance and be uncorrelated. Additionally, a circularly (symmetric) complex-valued random variable has a probability distribution that is invariant under rotation in the complex plane, namely the distribution of \mathbf{x} must be the same as the distribution of $e^{j\theta}\mathbf{x}$, where we have $\theta \in [0, 2\pi)$. The conventional signal processing techniques often assume, usually implicitly, that the complex-valued random signals are proper or circularly symmetric⁷. However, these assumptions may not be justified in some applications, hence the complex-valued signal processing techniques may in certain circumstances achieve a better performance [120], [130]–[133]. For more details on the complex-valued signal processing, please refer to [287]–[289].

VIII. HISTORY AND STATE-OF-THE-ART OF MIMO DETECTION

The research of MIMO detection is a broad and vibrant area. Its embryonic concept dates back to the 1960s. The earliest contribution on MIMO detection was sparked off in 1967 [213], when Shnidman considered the *equalization* problem of a bandwidth-limited pulse modulation system. This system was modelled with the aid of M waveforms, each of which is amplitude-scaled and simultaneously transmitted over a single physical channel, which has M outputs corresponding to each signal waveform. In order to eliminate both the ISI between the pulse train and the interference between different waveforms (also known as crosstalk), Shnidman formulated a *generalized Nyquist criterion* and proposed an optimum linear receiver. This landmark contribution was essentially inspired by the classic *Nyquist's problem* [290], which aims for the joint optimization of the transmitter and receiver

⁷For complex-valued Gaussian random vector \mathbf{Z} , circular symmetry implies that \mathbf{Z} is zero mean and proper.

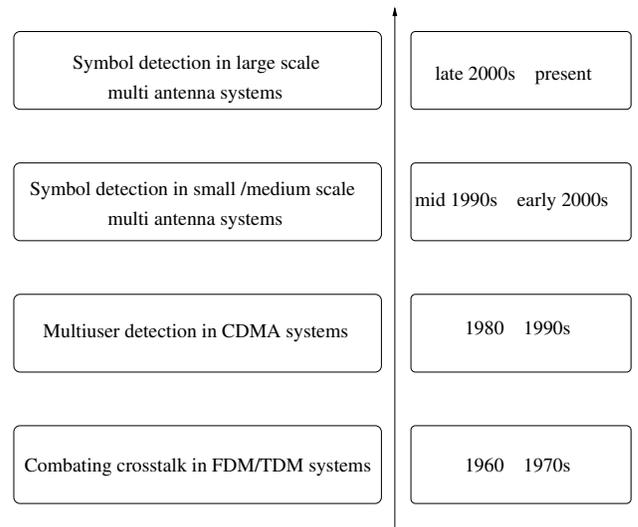


Fig. 14. The four historical periods in the development of MIMO detection.

for the sake of combating the ISI when communicating over a conventional single-input single-output channel. Since then, the MIMO detection problem has been studied in the context of diverse applications and under possibly different names. This half-century history can be roughly divided into four periods, as seen in Fig. 14, namely the period of combating crosstalk in the context of the early single-user FDM/TDM systems (1960s – 1970s) [213]–[216], [219], the period of multiuser detection (MUD) during the prevalence of CDM/CDMA systems (1980s – 1990s) [46], [50], [51], [217], [218], [220]–[248], the period of joint symbol detection in the small-/medium-scale multiple-antenna systems (mid-1990s – mid-2000s) [53], [54], [57]–[64], [68]–[72], [80], [82], [104]–[126], [128], [129], [134]–[146], [166]–[168], [248], [291]–[310], and the period of symbol detection in the large-scale multiple-antenna systems [118], [128], [311]–[328]. Diverse MIMO detectors have been proposed for meeting the requirements imposed by a multiplicity of applications. These MIMO detectors can be categorised from various perspectives, such as optimum/suboptimum, linear/nonlinear, sequential/one-shot, adaptive/non-adaptive, hard-decision/soft-decision, blind/non-blind, iterative/non-iterative, synchronous/asynchronous, coded/uncoded etc. The representative MIMO detectors considered in this paper are summarized in Fig. 15.

Owing to the similarities between the classic equalization problem encountered in channels imposing ISI and the *generic* MIMO detection problem defined by (1) and (3), it is not surprising that the techniques, which were found to be effective in combating ISI were also often extended to the context of MIMO detection problems [329]. Some of the equalization algorithms which have been adapted for MIMO detection include, but not limited to, the ML sequence estimation (Viterbi algorithm) [330]–[334] based equalization, linear ZF equalization [161], linear MMSE equalization [161], ZF/MMSE aided decision-feedback equalization [161], adaptive equalization [335], [336], blind equalization [337], [338] etc, as detailed below.

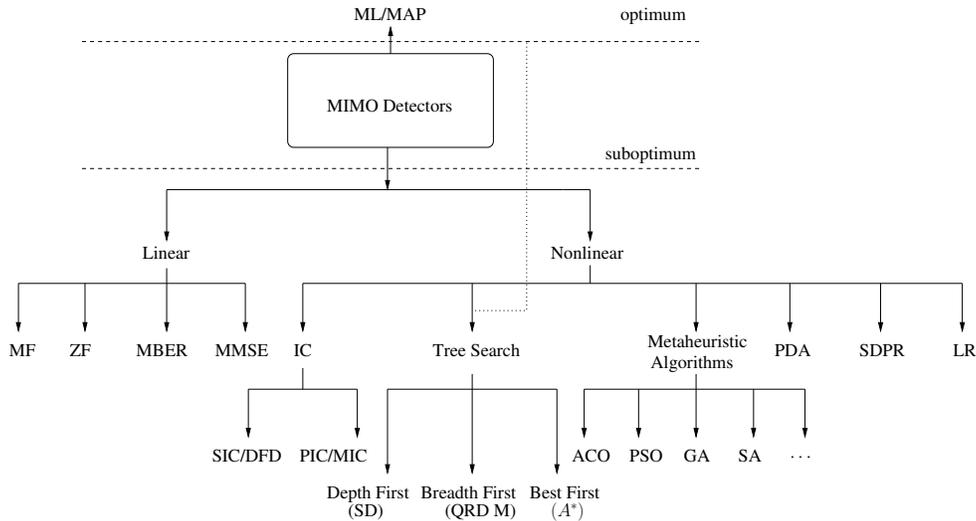


Fig. 15. Overview of representative MIMO detectors considered in this paper. All the acronyms used have been defined in our Glossary. Note that the tree-search based detector is in general suboptimum, but it has the flexibility to strike different tradeoffs between the achievable performance and the computational complexity. Even the optimum ML performance may be achieved by tree-search based detectors in certain scenarios.

A. Optimum MIMO Detector

The earliest work on *optimum* MIMO detectors dates back to 1976, when van Etten [216] derived an ML sequence estimation based receiver for combating both ISI and interchannel interference (ICI) in multiple-channel transmission systems. Explicitly, he demonstrated that under certain conditions, the performance of the ML receiver asymptotically approaches that of the optimum receiver of the idealized system which is free from both ISI and ICI. The significance of this work was not fully recognized until the research interests in commercial CDMA systems and multiple-antenna systems intensified.⁸

1) *Matched Filter (MF) versus Optimum MIMO Detector*: Although it is widely recognized at the time of writing that MIMO detection provides significant performance gains compared to conventional single-stream detection, there was a widespread misconception until the early 1980s that the MUI can be accurately modelled as a white Gaussian random process, and thus the conventional single-user MF (SUMF) based detector, as illustrated in Fig. 16, was believed to be essentially optimum. In 1983, this conventional wisdom was explicitly proven wrong by Verdú [222], [223] with the introduction of the optimal MUD in the context of asynchronous/synchronous Gaussian multiple-access channels shared by K users. The full analysis and derivation of the optimum MUD was reported later in [224], [340], demonstrating that there is, in general, a substantial gap between the performance of the conventional SUMF and the optimal MUD performance. Additionally, upon identifying the non-Gaussian nature of the MUI, Poor and Verdú [341] also designed nonlinear single-user detectors for CDMA systems operating in diverse scenarios such as weak interferers, high spreading gains and high signal-to-noise ratio

⁸In fact, van Etten's pioneering companion papers on the optimum MIMO detector [216] and on the optimum linear MIMO detector [215] were included in the book *The best of the best: Fifty years of communications and networking research* [339], which was compiled by the IEEE Communications Society in 2007, and he is the only researcher who has two sole-author papers included in this selection.

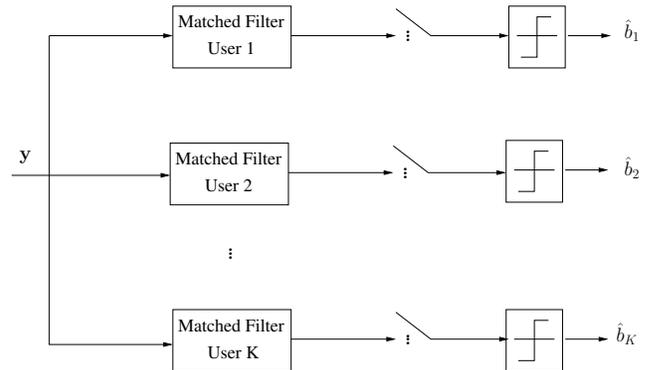


Fig. 16. An implementation example of the MF detector for synchronous CDMA systems employing BPSK modulation.

(SNR).

There does exist some situations where a *bona fide* application of the central limit theorem is feasible and hence the MUI can be rigorously proven to be asymptotically Gaussian.⁹ However, even if the MUI may be accurately modelled as a Gaussian variable, the SUMF is still not the optimal receiver. This is because the output of the MF for the desired user does not constitute a *sufficient statistic* in the presence of MUI [342]. In other words, the SUMF is optimal only in the context of the single-user channel contaminated by additive white Gaussian noise (AWGN). By contrast, in multiple-access systems, unless the multiplexed signals (after passing through the channel) are orthogonal, the outputs of the MFs corresponding to the interfering users contain valuable information which may be exploited for the detection of the symbol of interest, and hence more intelligent joint detection strategies capable of exploiting all MFs' outputs are required for achieving better

⁹A specific example of such a situation is that an infinite-population multiuser signal model with the individual amplitudes going to zero at the appropriate speed – in other words, when the overall interference power is fixed and the number of equal-power interferers tends to infinity [342].

detection performance.

2) *Optimum Decision Criteria*: When designing *optimal* detectors/receivers for communication systems, it is usually necessary to clarify in what sense the word “optimum” is referred to. This is because the specific choice of an optimal detector/receiver is strongly dependent on the specific assumptions and criteria of “goodness”. An optimal detector/receiver is the one that best satisfies the given criterion of goodness under a given set of assumptions. If either the criterion or the assumptions change, typically the choice of the optimal detector/receiver also changes. If the assumptions used in the theoretical analysis are inconsistent with the conditions of the realistic environment considered, then it is possible that the theoretically optimal detector/receiver obtained fails to provide valid insights and results for the practically achievable performance and designs. Special attention has to be paid to the definition of “optimum”, since the theoretically optimal results obtained are mainly invoked as a benchmark or bound, against which any other results can be compared. There are many criteria of goodness. As far as the performance of the detectors/receivers used in communication systems is concerned, the *minimum error probability criterion* is of primary interest, and hypothesis testing as well as likelihood ratios are of great importance. In Bayesian inference, the optimum decision criterion which minimizes the error probability based only on the observed signals and a given set of hypotheses is the maximum *a posteriori* (MAP) criterion. The error probability in communication systems can be measured in multiple scales, such as bit-error rate (BER), symbol-error rate (SER), and packet-/frame-/block-/vector-error rate (PER/FER/BLER/VER). When considering the MIMO system model of (1), the MAP criterion based MIMO detector which is optimal in the sense of minimum *VER* is formulated as

$$\mathcal{D}_{\text{MAP}} : \hat{\mathbf{s}} = \arg \max_{\mathbf{s} \in \mathbb{A}^{N_I}} \Pr(\mathbf{s}|\mathbf{y}). \quad (11)$$

Using Bayes’ rule, the *a posteriori* probability (APP) in (11) may be expressed as

$$\Pr(\mathbf{s}|\mathbf{y}) = \frac{p(\mathbf{y}|\mathbf{s}) \Pr(\mathbf{s})}{p(\mathbf{y})} = \frac{p(\mathbf{y}|\mathbf{s}) \Pr(\mathbf{s})}{\sum_{\mathbf{s}' \in \mathbb{A}^{N_I}} p(\mathbf{y}|\mathbf{s}') \Pr(\mathbf{s}')}, \quad (12)$$

where $\Pr(\mathbf{s})$ is the *a priori* probability of \mathbf{s} , and $p(\mathbf{y}|\mathbf{s})$ is the conditional probability density function (PDF) of the observed signal vector \mathbf{y} given \mathbf{s} . The MAP criterion can be simplified when each vector in \mathbb{A}^{N_I} has an identical *a priori* probability, i.e. we have $\Pr(\mathbf{s}) = 1/|\mathbb{A}|^{N_I}$ for all realizations of \mathbf{s} , where $|\mathbb{A}|$ represents the number of elements, i.e. the cardinality of the constellation alphabet \mathbb{A} . Furthermore, considering the fact that $p(\mathbf{y})$ is independent of which particular signal vector is transmitted, then the MAP detector of (11) becomes equivalent to the ML detector of

$$\mathcal{D}_{\text{ML}} : \hat{\mathbf{s}} = \arg \max_{\mathbf{s} \in \mathbb{A}^{N_I}} p(\mathbf{y}|\mathbf{s}). \quad (13)$$

Therefore, the MAP criterion is usually used in the iterative detection and decoding (IDD) aided receiver of forward-error-correction (FEC)-coded systems, where the *a priori* probabilities of the transmitted symbols, $\Pr(\mathbf{s})$, may be obtained

with the aid of a backward-and-forward oriented iterative information exchange between the signal detector and the channel decoder. By contrast, the ML criterion is usually used in FEC-uncoded systems, where the *a priori* probabilities of the transmitted symbols cannot be made available by the channel decoder. If \mathbf{n} is AWGN, then we have

$$p(\mathbf{y}|\mathbf{s}) \propto \exp(-\|\mathbf{y} - \mathbf{H}\mathbf{s}\|_2^2), \quad (14)$$

where the symbol \propto represents the relationship “is proportional to”. Consequently, we have

$$\max_{\mathbf{s} \in \mathbb{A}^{N_I}} p(\mathbf{y}|\mathbf{s}) \Leftrightarrow \min_{\mathbf{s} \in \mathbb{A}^{N_I}} \|\mathbf{y} - \mathbf{H}\mathbf{s}\|_2^2, \quad (15)$$

where the symbol \Leftrightarrow represents the relationship “is equivalent to”. Therefore, the ML detection problem for the system model of (1) can be reformulated as the finite-set constrained least-squares (LS) optimization problem of

$$\hat{\mathbf{s}}_{\text{ML}} = \arg \min_{\mathbf{s} \in \mathbb{A}^{N_I}} \|\mathbf{y} - \mathbf{H}\mathbf{s}\|_2^2, \quad (16)$$

which can also be interpreted as the *minimum Euclidean distance (MED) criterion*.

Note, however, that the above-mentioned MAP, ML and MED criterion based MIMO detectors all aim for minimizing the VER, but do not guarantee achieving the minimum BER and minimum SER, which are two metrics of particular importance in many applications, such as in FEC-coded systems. There are other frequently used criteria in MIMO detector design. The linear MF criterion is optimal for maximizing the received SNR in the presence of additive stochastic noise. The linear ZF criterion is optimal for maximizing the received signal-to-interference ratio (SIR). By contrast, the linear MMSE criterion based detector is optimal amongst all linear detectors¹⁰ in terms of achieving the MMSE, and in essence it is also optimal for maximizing the received SINR amongst linear detectors [343], [344]. Additionally, the linear minimum bit-error rate (MBER) criterion based detector achieves the lowest BER amongst all linear detectors, as detailed in Section VIII-B4.

3) *Computational Complexity*: The optimization problem of (16) can be solved by “brute-force” search over \mathbb{A}^{N_I} , resulting in an exponentially increasing computational complexity of $|\mathbb{A}|^{N_I}$. To elaborate a little further, let us consider the example shown in Fig. 17, where binary phase-shift keying (BPSK) modulation ($M = 2$) and $N_I = 2$ are employed. Hence, there are a total of $M^{N_I} = 4$ possible realizations for the transmitted symbol vector \mathbf{s} , and they are denoted as $\underline{\mathbf{s}}_1 = [1, 1]^T$, $\underline{\mathbf{s}}_2 = [1, -1]^T$, $\underline{\mathbf{s}}_3 = [-1, -1]^T$, $\underline{\mathbf{s}}_4 = [-1, 1]^T$.

To gain deeper understanding of the computational complexity of the optimum MIMO detector formulated in (13), let us examine its implementations in practical CDMA systems. More explicitly, the optimum MUD proposed in [224] for asynchronous CDMA systems consists of a bank of MFs

¹⁰In general, the MMSE detector and the linear MMSE detector are not necessarily the same. The former only aims at minimizing mean-square error (MSE) and does not impose any constraint on the form of the MMSE estimator. The latter assumes that the MMSE estimator is a linear function of the observed signal vector \mathbf{y} . If \mathbf{y} and the transmitted signal vector \mathbf{s} are jointly Gaussian, then the MMSE estimator is linear. In this case, for finding the MMSE estimator, it is sufficient to find the linear MMSE estimator.

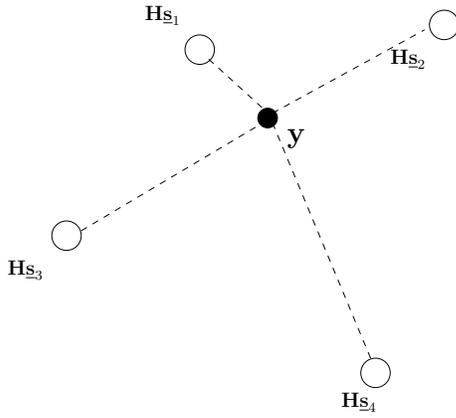


Fig. 17. Example of the optimal ML based MIMO detector in the context of $N_I = 2$ and BPSK modulation.

followed by a dynamic programming algorithm of the forward (Viterbi) type [330]–[334] (for ML criterion based detection) or of the backward-forward type [345]–[349] (for minimum error probability criterion based detection). As mentioned in Section VI, asynchronous CDMA systems can be modelled relying on the MIMO system model given in Section VI for transmission over linear dispersive channels exhibiting memory. Therefore, the optimum MUD conceived for asynchronous CDMA constitutes a *sequence* detector, while the optimum MUD of synchronous CDMA is a *one-shot* detector, and as such it is a special case of the asynchronous optimum MUD. The optimum MUD relying on brute-force search [224] requires that the transmitted energies of each user were known to the receiver. More critically, the computational complexity of the optimum decision algorithms suggested in [224], [348], [349] increases exponentially with the number of active users, i.e. it is on the order of $O(2^K)$ per bit for asynchronous transmission and $O(2^K/K)$ per bit for synchronous transmission, where K is the number of active users. This is because the optimum MUD of both the synchronous and asynchronous CDMA scenarios was proven by Verdú¹¹ to be an NP-hard and a non-deterministic polynomial-time complete (NP-complete) problem [46], [340]. Thus, *all known algorithms* designed for solving this problem optimally exhibit an exponentially increasing computational complexity in the number of decision variables. Therefore, the optimum MUD becomes computationally intractable for a large number of active users.

It should be noted that the optimal MIMO detection problem would only have a polynomially increasing complexity *if and only if* a polynomial-time solution could be found for any NP-complete problem, such as the famous *travelling salesman problem* and the *integer linear programming problem* which have been so far widely believed insolvable within polynomial time. However, the question of whether there exists a polynomial-time solution for NP-complete problems has not been answered by a rigorous proof to date. It is widely

¹¹In fact, the optimum MIMO detection problem of (16) constitutes an instance of the general *closest lattice-point search (CLPS)* problem, whose complexity had been analyzed earlier by Boas [45] in 1981, showing that this problem is NP-hard. Additionally, Micciancio [47] provided a simpler proof for the hardness of the CLPS problem in 2001.

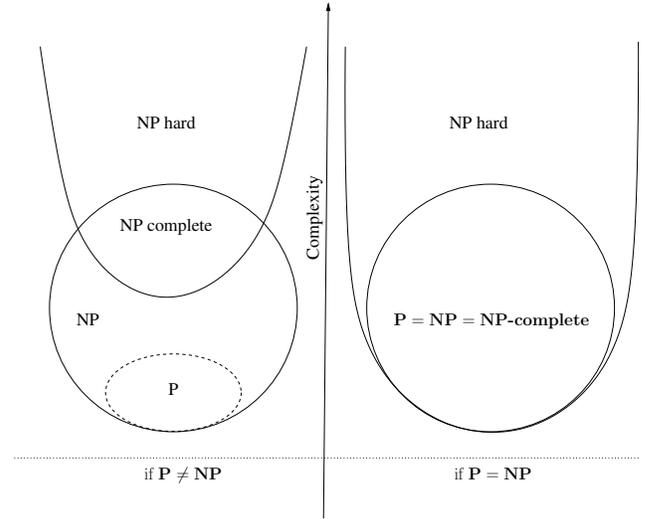


Fig. 18. Euler diagram for P, NP, NP-complete, NP-hard set of problems under both $P \neq NP$ and $P = NP$ assumptions [350], [351].

recognized that in computational complexity theory, the complexity class of “P” represents one of the most fundamental complexity classes, and it contains all decision problems that can be solved by a *deterministic Turing machine* using a polynomially increasing amount of computation time (this is conventionally abbreviated to the parlance of “polynomial-time” for convenience). In fact, the most important open question in computational complexity theory [350], [351] has been the formal proof of “Is $P = NP$?”, which explicitly poses the dilemma whether polynomial-time algorithms actually do exist for NP-complete problems, and by corollary, for all NP problems. Fig. 18 concisely depicts the Euler diagram characterizing the relationships amongst the P, NP, NP-complete, and NP-hard set of problems under both the $P \neq NP$ and $P = NP$ assumptions.

Additionally, it is worth mentioning that for some algorithms, such as the tree-search based MIMO detectors to be detailed in Section VIII-D, the computational complexity may vary in different scenarios. As such, the average computational complexity, the worst-case computational complexity and the distribution of computational complexity become important metrics to examine. Finally, in practical algorithm implementations, it is also important to consider the hardware complexity, which, in simplest form, can be measured by the silicon area and the number of NAND2 gates required in the IC implementation.

4) *Milestone Contributions*: For the sake of clarity, the main contributions to the development of the optimum MIMO detector are summarized in Table I. The substantial performance and complexity differences between the optimum MIMO detector and the conventional SUMF detector stimulated a lot of interests in the development of suboptimum MIMO detection algorithms that are capable of achieving good performance at a low computational cost. Some representative classes of suboptimum MIMO detectors include the linear detectors, the interference cancellation aided detectors, the tree-search based detectors, the PDA based detectors, the

TABLE I
MILESTONES IN THE DEVELOPMENT OF THE OPTIMAL MIMO DETECTOR

Year	Authors	Contributions
1976	van Etten [216]	Derived an ML sequence estimation based receiver for combating both the ISI and ICI in multiple-channel transmission systems and demonstrated that under certain conditions, the performance of the ML receiver is asymptotically as good as if both the ISI and ICI were absent.
1981	Boas [45]	Analyzed the complexity of the generic problem of “closest point search in an N_I -dimensional lattice”, which is identical to the optimum MIMO detection problem, as a function of the dimension N_I of the decision-variable vector, and proved that this problem is NP-hard. Thus, all known algorithms conceived for solving the generic MIMO detection problem optimally have an exponentially increasing computational complexity.
1983 - 1986	Verdú [222]–[224], [340]	First presented a full derivation and analysis of the ML based multiuser detector for asynchronous/synchronous CDMA systems; showed that there is, in general, a huge gap between the performance of the conventional SUMF and the optimal attainable performance; showed that the infamous near-far problem was not an inherent flaw of CDMA but a consequence of the inability of the SUMF to exploit the structure of the MUI; introduced the performance measure of multiuser asymptotic efficiency, which was later widely used in the asymptotic analysis of multiuser detectors at the high-SNR region.
1984 - 1989	Verdú [46], [340]	Independently proved that the optimum MUD problem in CDMA systems is NP-hard and NP-complete.
2001	Micciancio [47]	Presented a simpler proof of the NP-hardness of the problem of closest point search in an N_I -dimensional lattice.
2003	Garrett <i>et al.</i> [352]	Proposed the first VLSI implementation of a soft-output ML detector having a 19.2 Mbps uncoded data rate supporting up to 4×4 QPSK MIMO.
2003	Burg <i>et al.</i> [353]	Presented an efficient VLSI implementation of hard-decision optimum ML detector for QPSK MIMO. The proposed method does not compromise optimality of the ML detector. Instead it uses the special properties of QPSK modulation, together with algebraic transformations and architectural optimizations, to achieve low hardware complexity and high speed up to 50 Mbps.

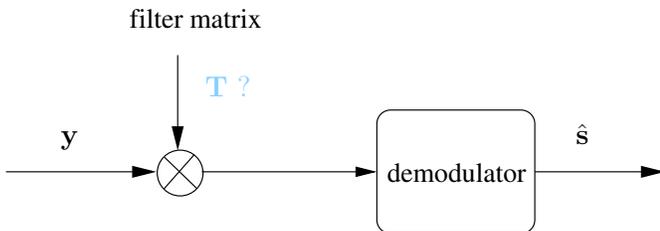


Fig. 19. Conceptual illustration of linear MIMO detectors.

SDPR based detectors and the LR based detectors etc., as seen in Fig. 15 and detailed below.

B. Linear MIMO Detectors

The linear MIMO detectors of Fig. 15 are based on a linear transformation of the output signal vector \mathbf{y} . In general, they are known for their appealingly low complexity, but suffer from a considerable performance loss in comparison to the ML detector. More explicitly, the decision statistics of linear MIMO detectors may be expressed as

$$\mathbf{d} = \mathbf{T}\mathbf{y}, \quad (17)$$

where \mathbf{T} is the linear transformation (or filtering) matrix to be designed using various criteria. A conceptual illustration of the linear MIMO detectors is given in Fig. 19.

1) *MF Detector*: For the sake of illuminating the philosophy of linear MIMO detectors, let us rely on (4) and

continue by considering the MF detector, which has the lowest computational complexity among all MIMO detectors and its linear transformation matrix is given by

$$\mathbf{T}_{\text{MF}} = \mathbf{H}^H. \quad (18)$$

Upon using the MF detector of (18), we obtain

$$\mathbf{d} = \mathbf{H}^H \mathbf{H} \mathbf{s} + \mathbf{H}^H \mathbf{n}. \quad (19)$$

The MF detector is well known as the optimal linear filter designed for maximizing the output SNR in the presence of additive stochastic noise. In Section VIII-A1, we have provided some discussions regarding the MF detector in order to justify the motivations of developing *joint detection* based MIMO detectors. To elaborate a little further, the MF detector had been widely used before the concept of MIMO detection was born, and it is essentially based on the single-user detection philosophy. Hence, strictly speaking, it does not belong to the *joint detection* based MIMO detection family, and typically it exhibits a poor performance in CCI-limited MIMO systems. However, in *certain* LS-MIMO contexts [25], [354], the MF detector is capable of approaching the performance of the optimal ML detector, as it will be further discussed in Section IX.

2) *Linear ZF Detector*: Assuming that the noise vector is zero, (4) becomes a system of linear equations, and the MIMO detection problem becomes equivalent to “finding the solution for N_t unknown variables subject to N_r linear equations”. Therefore, if \mathbf{H} is a square matrix (i.e. $N_r = N_t$) and of full

rank, the solution of this system of linear equations is given by $\mathbf{s} = \mathbf{H}^{-1}\mathbf{y}$. To generalize this problem a little further, if the matrix \mathbf{H} satisfies $N_r > N_t$ and has a full column rank of N_t , we have $\mathbf{s} = \mathbf{H}^\dagger\mathbf{y}$, where $\mathbf{H}^\dagger = (\mathbf{H}^H\mathbf{H})^{-1}\mathbf{H}^H$ is the left-multiplying Moore-Penrose pseudoinverse of \mathbf{H} . This example actually conveys the essential idea of the ZF criterion based MIMO detector, for which the linear transformation matrix is given by

$$\mathbf{T}_{\text{ZF}} = \mathbf{H}^\dagger, \quad (20)$$

and if \mathbf{H} is invertible, the left-multiplying pseudoinverse \mathbf{H}^\dagger and the inverse coincides, i.e. we have $\mathbf{H}^\dagger = \mathbf{H}^{-1}$. Upon using the ZF detector, we have $\mathbf{d} = \mathbf{s} + \mathbf{H}^\dagger\mathbf{n}$, which indicates that the interference amongst the multiple inputs is completely eliminated, albeit the noise power is augmented.

Similar to the case of the optimum ML-based MIMO detector, the ZF criterion based linear MIMO detector of Fig. 15 was also first proposed by van Etten [215] in 1975 for a multiple-channel multiplexing transmission system subjected to both ISI and ICI. As far as CDMA systems are concerned, this solution was first proposed by Schneider [218] in 1979 for synchronous CDMA systems transmitting equal-energy multiuser signals, where he sought to minimize the probability of bit error, but erroneously arrived at the ZF detector. From 1986 to 1990, Lupas and Verdú systematically investigated this detector in the context of both synchronous [226], [355] and asynchronous [227], [356] CDMA systems. They referred to it as the linear *decorrelating* multiuser detector. It was shown that if the transmitted energies of each user are unknown to the receiver, then both the ML amplitude estimates and the ML decisions on the transmitted bits are obtained by the ZF detector, regardless of the values of the received energies of each user. As a beneficial result, the ZF detector achieves the *same* degree of resistance to the infamous *near-far problem* as the optimum ML detector, despite its significantly reduced computational complexity. The insight that the near-far problem was not an inherent flaw of CDMA but a consequence of the SUMF's inability to exploit the non-Gaussian structure of the MUI [224], and the fact that the joint detection based MUDs, including its linear versions, achieve a significantly better near-far resistance [226], [227], [355], [356] became another major incentive for the subsequent research activities dedicated to MUD in CDMA. Additionally, with the advent of the multiple-antenna technologies conceived during the mid-1990s, the ZF detector was first studied in the SDM-based VBLAST systems by Foschini, Wolniansky, Golden and Valenzuela [166]–[168].

3) *Linear MMSE Detector*: As seen in Fig. 15, the linear transformation matrix \mathbf{T} of (17) can also be designed according to the MMSE criterion, which minimizes the mean-square error between the actual transmitted data and the channel's output data after using the linear transformation matrix \mathbf{T} . To be more specific, \mathbf{T} is obtained by solving the optimization problem of

$$\mathbf{T}_{\text{MMSE}} = \arg \min_{\mathbf{T}} \mathcal{E} \left(\|\mathbf{s} - \mathbf{T}\mathbf{y}\|_2^2 \right). \quad (21)$$

Using the *orthogonality principle* [357], we have

$$\mathcal{E}[(\mathbf{s} - \mathbf{T}\mathbf{y})\mathbf{y}^H] = \mathbf{0}, \quad (22)$$

then \mathbf{T}_{MMSE} may be derived as

$$\mathbf{T}_{\text{MMSE}} = (\mathbf{H}^H\mathbf{H} + 2\sigma^2\mathbf{I})^{-1}\mathbf{H}^H, \quad (23)$$

where σ^2 is the noise power per real dimension, and $\mathcal{E}(\mathbf{s}) = 1$ is assumed. Compared to the linear ZF detector, the linear MMSE detector achieves a better balance between the MUI elimination and noise enhancement by jointly minimizing the total error imposed by both the MUI and the noise. Hence, the linear MMSE detector achieves a better performance at low SNRs than the ZF detector.

The MMSE criterion based linear MIMO detector was first proposed by Shnidman [213] in 1967, and hence it is the oldest MIMO detector found in the literature. The *generalized Nyquist criterion* formulated by Shnidman first indicates that the ISI and crosstalk¹² between multiplexed signals essentially represent identical phenomena. Then, relying on this insight, he proposed a linear receiver that is optimal in the sense of the MMSE criterion for combating both the ISI and crosstalk in single-channel multiple-waveform-multiplexed pulse-amplitude modulation (PAM) systems. In 1970, Kaye and George [214] explicitly extended the MMSE receiver of [213] to the family of general multiple-channel systems transmitting multiplexed PAM signals and/or providing diversity. The MMSE criterion based linear detector for CDMA systems was proposed by Xie, Rushforth and Short in 1989 [240], [358]. A decade later, it was also revisited by Foschini, Wolniansky, Golden and Valenzuela in the context of SDM-based multi-antenna systems [166]–[168]. The probability of error experienced at the output of the linear MMSE detector was analyzed by Poor and Verdú [359] in 1997.

4) *Other Linear Detectors*: As observed in the family-tree of Fig. 15, there are a range of other criteria for designing the linear transformation matrix \mathbf{T} .

- For example, in [226], [355], Lupas and Verdú also proposed a maximum asymptotic-multiuser-efficiency (MAME) based linear detector, which is capable of minimizing the probability of bit errors in the limit as the noise approaches zero. The asymptotic-multiuser-efficiency (AME) is a metric which characterizes the performance of the MUD in the high-SNR region. It implies the performance loss of the desired user in the high-SNR region due to the interference imposed by other active users. To be more specific, it is defined as the limit of the ratio between the effective SNR (that is required by a single-user system to achieve the same asymptotic error probability) and the actual SNR of the desired user, when the noise power tends to zero. Furthermore, the linear MAME detector was designed by exploiting the assumption that the individual transmitted energies of all the users are fixed and known to the receiver. By contrast, the ZF detector does *not* require the knowledge of the

¹²Crosstalk may be interpreted as a special case of ICI. For example, as mentioned before, in [213], crosstalk means the interference between the multiplexed different waveforms.

TABLE II
MILESTONES IN THE DEVELOPMENT OF LINEAR MIMO DETECTORS

Year	Authors	Contributions
1967	Shnidman [213]	First formulated a generalized Nyquist criterion, which pointed out that the ISI and crosstalk between multiplexed signals are essentially identical phenomena; he then proposed a linear MMSE receiver for combating both ISI and crosstalk in single-channel multiple-waveform-multiplexed PAM systems.
1970	Kaye <i>et al.</i> [214]	Extended the MMSE receiver of [213] to the general multiple-channel systems transmitting multiplexed PAM signals and/or providing diversity.
1975	van Etten [215]	Developed linear receivers based on both the ZF criterion and the minimum error probability criterion for a multiple-channel transmission system similar to that of [214]; these two detectors heralded the linear ZF and the linear MBER multiuser detectors of CDMA systems.
1975	Horwood <i>et al.</i> [217]	Proposed two linear signal-correlation based detectors for synchronous digital multiple-access systems; one of them assumes that each user only knows its own signature, while the other assumes that each user knows all users' signatures; this is the first attempt in multiple-access systems to exploit the structure of the signals simultaneously sent, which is the key idea of MUD in CDMA systems.
1979	Schneider [218]	First made an attempt to conceive MUD for CDMA systems; he proposed the linear decorrelating detector, namely the linear ZF detector, which represents one of the mainstream MUD approaches conceived for CDMA systems; this detector was also extended to the scenario of combating crosstalk in M -ary multiplexed transmission systems in 1980 [219].
1986-1990	Lupas <i>et al.</i> [226], [227], [355], [356]	Systematically investigated the linear ZF MUD in the context of both synchronous [226], [355] and asynchronous [227], [356] CDMA systems; they showed that the ZF detector achieves exactly the same degree of resistance to the infamous near-far problem as the optimum ML detector, despite its much lower computational and implementation complexity; they also first proposed a linear MAME MUD, which is capable of equivalently minimizing the probability of bit error in the limit as the noise approaches zero.
1989 - 1990	Xie <i>et al.</i> [240], [358]	First proposed the MMSE criterion based linear MUD, the modified linear equalizer based MUD, and the WLS linear MUD for CDMA systems. In contrast to the linear ZF detector, to the linear MMSE detector, and to the modified linear equalizer based detector, the linear WLS detector is capable of providing an unbiased estimate of the transmitted symbols.
1993 - 1997	Mandayam <i>et al.</i> [360]–[363]	First proposed the MBER criterion based linear MIMO detectors for CDMA systems; the linear MBER detector is capable of outperforming the linear MMSE detector when either the signature cross-correlation is high or the background noise is non-Gaussian.
1996 - 1999	Foschini <i>et al.</i> [166]–[168]	First discussed the application of linear ZF/MMSE detectors in multiple-antenna aided SDM-MIMO systems.
2006	Chen <i>et al.</i> [294]	Proposed the MBER criterion based linear detector for multi-antenna aided MIMO systems.
2006	Burg <i>et al.</i> [364]	Presented an algorithm and a corresponding VLSI architecture for the implementation of linear MMSE detection in packet-based MIMO-OFDM communication systems. The algorithm also supports the extraction of soft information for channel decoding.
2009	Yoshizawa <i>et al.</i> [365]	Reported a VLSI implementation for a 4×4 MIMO-OFDM transceiver relying on linear MMSE, which achieves a target data rate of 1 Gbps.
2014	Yin <i>et al.</i> [328]	Presented the first application-specific integrated circuit (ASIC) implementation for the soft-output linear MMSE detector based large-scale MIMO system which uses 128 BS antennas to support 8 users, and a sum-rate of 3.8 Gbps was achieved.

transmitted energies of the users.

- Additionally, since a common disadvantage of the linear ZF and MMSE detectors is that their estimates of the transmitted symbols are *biased*, Xie, Rushforth and Short [240], [358] proposed the so-called weighted least-squares (WLS) linear detector, which is capable of providing an *unbiased* estimate of the transmitted symbols. It is worth pointing out that except for the linear MF and ZF detectors, other linear MIMO detectors – including the linear MMSE detector, the linear MAME detector and the linear WLS detector – were typically derived under the assumption that the system parameters such as the signal's phase, power and delay are known. As a result,

in practice these parameters must be estimated and the receiver's structure has to be regularly modified to reflect the updated estimates.

- Another important class of linear MIMO detectors are based on the MBER criterion. The linear MBER detector is capable of outperforming the linear MMSE detector when either the signature cross-correlation is high or the background noise is non-Gaussian [366]. Again, the MBER based MIMO detector was first considered by van Etten [215] in 1975 in the context of a multiple-channel multiplexing transmission system subjected to both ISI and ICI. This MBER criterion was later studied in the context of CDMA systems [360]–[363], [366]–[371] and

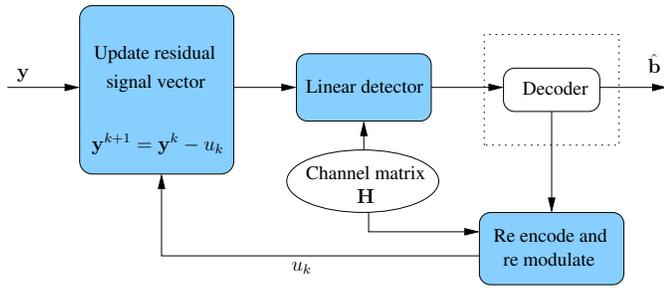


Fig. 20. The basic principle of the SIC/DFD based MIMO detectors.

multi-antenna systems [294], [295].

- Finally, we would like to mention that the linear MIMO detector can also be designed from the perspective of a linear equalizer [240], [358], since the mathematical models of the MIMO detection problem and of the equalization problem are similar [329]. To elaborate a little further, in MIMO systems each symbol's interference is imposed by other simultaneous transmissions, while in the band-limited ISI channels requiring equalization, the interference of a particular symbol is due to other symbols that are transmitted sequentially in the time domain.

The main contributions to the development of linear MIMO detectors are summarized in Table II.

C. Interference Cancellation Aided MIMO Detectors

Another important class of suboptimum MIMO detectors portrayed in Fig. 15 are constituted by the *interference cancellation* based MIMO detectors, which are *nonlinear* and generally achieve a better performance than linear MIMO detectors. The concept of interference cancellation was first studied in 1974 by Bergmans and Cover [372], [373], as well as by Carleial [184] in 1975, in their information-theoretic studies of broadcast channels and of interference channels, respectively. In the context of CDMA and multi-antenna systems, this class of MIMO detectors have numerous variants due to the associated design flexibility, including the successive interference cancellation (SIC) detector [166]–[168], [238], [374], the parallel interference cancellation (PIC) detector [228], [235], [304], the multistage interference cancellation (MIC) detector [221], [231], [232], [375], and the decision-feedback detector (DFD) [240], [242], [243], [245] etc. The interference cancellation based MIMO detectors are typically capable of providing a significantly better performance than their linear counterparts at the expense of a higher complexity, especially in the absence of channel coding [247], albeit this is not necessarily always the case. In practice, a common drawback of the interference cancellation based MIMO detectors is that they often suffer from error propagation. Hence their performance only approaches that of the optimum ML based MUD when the interfering users have a much stronger signal strength than the desired user. From this perspective, the weakest user benefits most from the employment of the interference cancellation detector.

- *SIC*: In the most popular SIC based MIMO detector, a single symbol s_i is detected at a time. Then the inter-

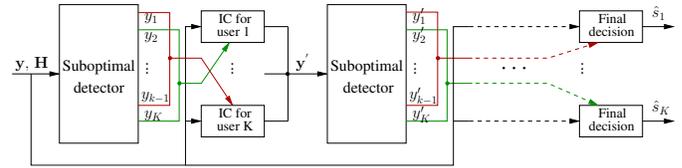


Fig. 21. The basic principle of the PIC/MIC based MIMO detectors.

ference imposed by this particular symbol on the other symbols $\{s_k\}_{k \neq i}$ yet to be detected is subtracted after recreating the interference upon generating the modulated signal corresponding to this symbol. In this scheme, it is most important to cancel the effect of the strongest interfering signal before detecting the weaker signals. Therefore, the specific symbol detection ordering, which can be designed according to various criteria, is quite critical for the SIC detector's performance. Some of the typical ordering criteria for ordered SIC (OSIC) include the decreasing signal-to-noise ratio (DSNR) criterion [296], [297], the greatest signal-to-noise ratio (GSNR) criterion [298], the increasing mean-square error (IMSE) criterion [297], and the least mean-square error (LMSE) criterion [299]–[301]. The SIC method performs well when there is a substantial difference in the received signal strength of the multiple simultaneously transmitted symbols. However, this condition is not always satisfied in practical applications, which renders the SIC detector potentially sensitive to decision error propagation. Therefore, the SIC detector is well-suited for multiple-access systems suffering from the near-far problem, such as the family of CDMA or SDMA systems. In the SIC detector, there is a need for detection reordering at each iteration of the SIC detector, and the number of detection iterations increases linearly with the number of symbols in \mathbf{s} . Therefore, for a system which has a high-dimensional transmitted symbol vector \mathbf{s} , the SIC technique imposes a substantial complexity, which ultimately increases the processing delay. The SIC detector designed for CDMA systems was first proposed by Viterbi [238]. Later it was studied extensively in [244], [246], [374], [376]–[381]. In the context of multi-antenna based SDM systems, the SIC scheme was first studied by Foschini, Wolniansky, Golden and Valenzuela in [166]–[168], and it was later studied more comprehensively by numerous other researchers in [291]–[293]. Among these schemes, Viterbi [238] proposed an SIC scheme for a convolutionally coded direct-sequence CDMA (DS-SS) system and revealed that with the aid of the SIC based receiver, the aggregate data rate of all simultaneous users may approach the Shannon capacity of the Gaussian channel. It should be emphasized that although theoretically the SIC method achieves the Shannon capacity in the multiple-access channel by assuming perfectly error-free detection (hence avoiding decision error propagation), this is not necessarily true in practice, because the SIC method is sensitive to decision error propagation, and hence MIMO detectors that are more robust to decision error propagation might

outperform the SIC detector in practice. Another fact worth mentioning is that the performance degradation imposed by error propagation in the SIC detector can be mitigated by accurate power control [382].

- *PIC*: Alternatively, in the PIC based MIMO detector, all symbols are detected simultaneously. For each symbol, the coarse initial estimate of the interfering symbols can be used for regenerating the interference and then for deducting it from each of the composite received signals. Then this PIC detection process may be repeated for several iterations. Therefore, sometimes the PIC detection is also regarded as a MIC technique, or vice versa. Compared to the SIC detector, the PIC detector has lower processing delay, and is more robust to inter-stream error propagation. However, its near-far resistance is inferior to that of the SIC detector, because some users might have much weaker received signal strength than others. Hence, the PIC is suitable for similar-power signals, while the SIC performs better for different-power streams. In the context of CDMA systems, the earliest contribution to PIC may be attributed to Kohno *et al.* [228]–[230]. Later significant contributions to PIC were also attributed to Yoon [234], [383], Divsalar [235], Buehrer [384] and Guo [385] *et al.*. In the context of multi-antenna MIMO systems, the PIC detector was studied mainly in [302]–[304].
- *MIC*: In the MIC based MIMO detector, the first stage can be the conventional SUMF detector, the linear ZF/MMSE detector, the SIC detector or any other suboptimum detector. *The decisions made for all symbols s by the $(n-1)$ th stage are employed as the input of the n th stage for the sake of cancelling the MUI.* Note that historically, the MIC detector was developed independently of the PIC, although they share similar concepts. The MIC detector was first proposed by Timor for frequency-hopped CDMA (FH-CDMA) systems [220], [221]. Then, it was extensively studied in the context of both *asynchronous DS-CDMA* systems [231], [386] and *synchronous DS-CDMA* systems [232], [375], [387]. An analytical framework was proposed for adaptive MIC in [236].
- *DFD*: The concept of DFD is based on the same premise as that of the family of decision-feedback equalizers [391], [392]. Although DFD also relies on the SIC idea, its emphasis is on the receiver filter’s optimization, which consists of a feedforward filter and a feedback filter optimization. The first DFD scheme was proposed by Xie *et al.* [240], [358] for *asynchronous DS-CDMA systems*. Other major contributors of the subject of DFD include Duel-Hallen [242], [243], [388], [389], who comprehensively investigated decision-feedback MUDs designed for both synchronous [242], [388] and asynchronous [243], [389] CDMA systems. Furthermore, Varanasi [245] analyzed the performance of a general class of DFDs using a new performance metric constituted by the probability that at least one user is detected erroneously, and also proposed algorithms for determining the most beneficial detection ordering.

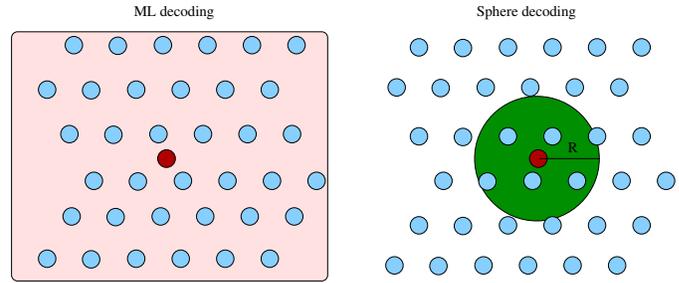


Fig. 22. The basic principle of the SD based MIMO detectors. In short, it solves the problem of finding the “closest” lattice point to a given vector y in the skewed and rotated (caused by the MIMO channel) lattice Hs .

The basic principles of the SIC/DFD detectors and the PIC/MIC detectors are illustrated in Fig. 20 and Fig. 21, respectively. The main contributions to the development of the interference cancellation based MIMO detectors are summarized in Table III. A more comprehensive exposition of the above-mentioned MIMO detectors developed in the context of CDMA systems can be found in [48]–[51], [248], [393].

D. Tree-Search Based MIMO Detectors

The tree-search based MIMO detectors are arguably the most popular detectors investigated in the era of multi-antenna MIMO systems. This is because 1) the introduction of the powerful SD algorithm happened to coincide with the development of multi-antenna MIMO techniques; 2) some profound research results on the CLPS problem showed that the tree-search MIMO detectors enjoy significant design flexibility in terms of striking an attractive tradeoff between approaching the optimum ML performance and reducing the computational complexity.

Indeed, some tree-search based MUDs had been reported earlier in the context of CDMA systems [239], [241], [394]–[396]. For example, the so-called (depth-first) stack sequential detection was proposed by Xie in [239], [394], while the (breadth-first) K -best tree-search detection was proposed, again, by Xie in [241], [395], which was then further studied by Wei *et al.* in [396]. Looking back to the earlier history, because of the convertibility between the trellis structure and the tree structure, the tree-search detection methods proposed for CDMA systems, including the classic M -algorithm [397], [398] and T -algorithm [399]–[402], were actually extensions of their counterparts used in trellis decoding [397]–[410]. However, these tree-search based detectors did not attract as much attention as the linear detectors and the interference cancellation aided detectors in the era of CDMA systems.

The research interests related to tree-search based MIMO detectors were largely stimulated by the seminal work of Viterbo *et al.* [53], [305], who first applied the depth-first SD algorithm to the ML detection of multidimensional constellations transmitted over single-antenna fading channels. The basic principle of the SD algorithm is illustrated in Fig. 22. Compared to the optimal brute-force search based ML decoding, the SD algorithm aims for reducing the computational complexity by only searching over the noiseless received

TABLE III
MILESTONES IN THE DEVELOPMENT OF INTERFERENCE CANCELLATION MIMO DETECTORS

Year	Authors	Contributions
1974 - 1975	Bergmans and Cover [372], [373]	First demonstrated the effectiveness of the SIC concept from an information-theoretic perspective for broadcast channels.
1975	Carleial [184]	First characterized the effectiveness of the SIC principle from an information-theoretic perspective for interference channels.
1980-1981	Timor [220], [221]	First proposed a two-stage [220] MUD and a multistage [221] MUD for FH-CDMA systems employing multiple frequency-shift keying (MFSK) modulation; showed that the mutual interference between the users of a FH-CDMA system may be significantly reduced by making use of the well-defined algebraic structure of the users' signature waveforms, and that introducing an extra stage of interference cancellation may further improve the detector's performance.
1990	Viterbi [238]	First conceived an SIC scheme for a convolutionally coded DS-SS system, and revealed that with the aid of the SIC based receiver the aggregate data rate of all simultaneous users can approach the Shannon capacity of the Gaussian channel.
1983 - 1990	Kohno <i>et al.</i> [228]–[230]	First proposed a PIC based MUD for CDMA systems.
1988 - 1991	Varanasi <i>et al.</i> [231], [232], [386], [387]	Designed and systematically characterized the MIC MUDs for both asynchronous and synchronous CDMA systems.
1989 - 1990	Xie <i>et al.</i> [240], [358]	First proposed a DFD based MUD for <i>asynchronous DS-SS systems</i> .
1991 - 1995	Duel-Hallen <i>et al.</i> [242], [243], [388], [389]	Systematically investigated DFD MUDs conceived for both synchronous [242], [388] and asynchronous [243], [389] CDMA systems from a receiver filter optimization perspective.
1996 - 1999	Foschini <i>et al.</i> [166]–[168]	First discussed the ZF based SIC detector conceived for multiple-antenna aided SDM-MIMO systems.
2002	Chin <i>et al.</i> [302]	Extended the PIC detector to the multiple-antenna aided SDM-MIMO systems.
2003	Wübben <i>et al.</i> [296]	Proposed a QR-decomposition (QRD) based MMSE-SIC detector for multiple-antenna aided SDM-MIMO systems.
2003	Guo <i>et al.</i> [390]	Presented a VLSI implementation of the V-BLAST detector for a 4×4 MIMO system employing QPSK, and a detecting throughput of 128 Mbps was achieved.
2011	Studer <i>et al.</i> [304]	Reported an ASIC implementation of a soft-input soft-output MMSE based PIC detector for multiple-antenna aided SDM-MIMO systems.

signals that lie within a hypersphere of radius R around the received signal. Note that before it was applied in digital communications, the SD algorithm, also known as the Fincke-Pohst algorithm, had been reported in [411], [412]. Later, Agrell *et al.* [54] proposed to employ the Schnorr-Euchner (SE) refinement [413] of the Fincke-Pohst algorithm [411], [412] for solving the *CLPS problem*, and they concluded that the SE enumeration is more efficient than the Viterbo-Boutros (VB) implementation [53] of the SD algorithm. More recently, Damen *et al.* [57] proposed two improved SD algorithms for finding the closest lattice point, both of which were shown to offer a significant complexity reduction compared to the VB-SD [53] and to the SE-SD [54], respectively. There exist a number of other variants of the tree-search based MIMO detectors, which mainly fall into three categories: the depth-first tree-search detector [53], [54], [57]–[61], [305], the breadth-first tree-search detector [62]–[64], [80], [82], [306] and the best-first tree-search detector [68]–[72], [307], [308], [414].

The major momentum which propels the enormous research activities on tree-search based MIMO detectors is that they were shown to be capable of achieving near-ML performance, or even exact ML performance at the expense of significantly reduced complexity [58], [59], [415]–[417]. However, we

would like to emphasize that this claim is shown not true in general [60], [418]. More specifically, Hassibi and Vikalo [58], [59], [415]–[417] first studied the expected complexity, averaged over the noise and over the lattice, of the Fincke-Pohst SD based MIMO detectors. It was claimed that although the worst-case complexity of the SD algorithm is exponential, the expected complexity of the SD algorithm is polynomial, in fact, often roughly cubic, for a wide range of SNRs and number of antennas. Contrary to this claim, Jaldén and Ottersten [60], [418] demonstrated that the expected complexity of SD based MIMO detectors is given by $O(M^{\beta N_t})$, where $\beta \in (0, 1]$ is a small factor depending on the value of SNR. In other words, the expected complexity of the SD algorithm is still exponential for fixed SNR values. Therefore, in general the tree-search based MIMO detectors are not efficient for MIMO systems which operate under low-SNR condition and/or have a large number of inputs. Notably, in order to avoid the varying-complexity characteristic of tree-search based MIMO detectors, recently a K -best algorithm based suboptimal fixed-complexity SD (FCSD) was proposed for MIMO systems [80]. It was shown that the FCSD achieves a near-ML performance with a complexity of $O(M^{\sqrt{N_t}})$ [82] regardless of the specific SNR encountered, which represents an attractive solution of facilitating an efficient hardware

implementation compared to the conventional exponential-complexity SD. The main contributions in the development of the depth-first tree-search MIMO detectors, the breadth-first tree-search MIMO detectors and the best-first tree-search MIMO detectors are summarized in Table IV, Table V and Table VI, respectively.

E. Lattice-Reduction Aided Detectors

Lattice-reduction (LR) aided detectors constitute another important class of MIMO detectors, which rely on the algebraic concept of “lattice” originating from classic geometry and group theory¹³. A lattice in \mathbb{R}^n is a discrete subgroup of \mathbb{R}^n , which spans the real-valued vector space \mathbb{R}^n . Each lattice in \mathbb{R}^n can be generated from a *basis* of the vector space by forming all linear combinations with integer coefficients. In the MIMO transmission model of (1), the received signal vector \mathbf{y} is the noisy observation of the vector $\mathbf{H}\mathbf{s}$, which is in the lattice spanned by the column vectors \mathbf{H} , since both the real and imaginary parts of all the elements of \mathbf{s} may be transformed to integers by shifting and scaling.

A lattice typically has multiple sets of basis vectors. Some bases spanning the same lattice as \mathbf{H} might be “closer” to orthogonality than \mathbf{H} itself. The process of finding a basis closer to orthogonality is referred to as LR. Theoretically, finding the optimal (closest to orthogonality) set of basis vectors is computationally expensive. Therefore, in practice LR algorithms typically aim for finding a “better” channel matrix $\mathcal{H} = \mathbf{H}\mathbf{L}$, where the real and imaginary parts of all the entries of the unimodular matrix \mathbf{L} are integers and the determinant of \mathbf{L} is ± 1 or $\pm j$. As a result, the LR preprocessing technique is capable of improving the “quality” of the MIMO channel matrices.

There is a variety of LR algorithms developed by mathematicians [428]. Some of them, such as Gaussian reduction [429], Minkowski reduction and Korkine-Zolotareff (KZ) reduction [430], are capable of finding the optimal basis for a lattice, but they are computationally prohibitive for communications systems [430]–[433]. Other well-known LR algorithms include the Lenstra-Lenstra-Lovász (LLL) algorithm [434], Seysen’s algorithm [90], [91], [435] and Brun’s algorithm [92], [436], [437], which are all suboptimal. The most popular LR algorithm is the LLL algorithm, which does not guarantee to find the optimal basis, but it guarantees to find a basis within a factor to the optimal one in polynomial time [88], [89], [431], [438]. For example, it was formally proved in [88] that an upper bound on the average computational complexity of LLL is $\mathcal{O}(N_t^3 \log N_t)$, where N_t is the size of \mathbf{s} . Furthermore, a tighter upper bound of $\mathcal{O}(N_t^2 \log \frac{N_r}{N_r - N_t + 1})$ was found in [89], where N_r is the size of \mathbf{y} . Note that the worst-case computational complexity of the LLL algorithm can be infinite [89], [431]. However, in practice the probability of the scenario which leads to this worst-case complexity is zero. There are

mainly two variants for the LLL algorithm, namely the real-valued LLL [84], [85] and the complex-valued LLL [95]–[98]. The real-valued LLL is applied to the real-valued MIMO system model of Section VII, while the complex-valued LLL is designed for directly using it in the complex-valued MIMO system model. Additionally, the authors of [439] proposed an LLL algorithm which is not only applicable to the complex-valued model, but also applicable to the Euclidean ring in general.

In principle, LR can be combined with virtually all the other MIMO detectors to further improve their performance. For example, the LR technique was used in conjunction with traditional linear ZF and nonlinear ZF-SIC detectors in [83], as well as with linear MMSE and nonlinear MMSE-SIC detectors in [85], [440], both achieving a substantial performance gain with little additional computational complexity. As a further advance over [83], a real-valued LLL-based LR algorithm was used in [84], which enables the application of the algorithm in MIMO systems with arbitrary numbers of dimensions. In addition, it was shown in [84], [86] that LR can also be favorably applied in MIMO systems that use precoding. The LLL based LR algorithm was shown to be capable of achieving the maximum attainable/full receive diversity in MIMO decoding [87]. The VLSI implementation of the LR technique aided precoder and of the K -best MIMO detector was reported in [92] and [93], respectively. LR-aided soft-decision MIMO detectors are studied in [99]–[102]. Recently, element-based LR algorithms, which reduce the diagonal elements of the noise covariance matrix of linear detectors and thus enhance the asymptotic performance of linear detectors, were proposed for large-scale MIMO systems [103]. The main contributions in the development of LR-aided MIMO detection are summarized in Table VII.

F. Probabilistic Data Association Based Detectors

The PDA filter technique is a statistical approach originally invented by Bar-Shalom [441] in 1975 for the problem of target tracking and surveillance in a cluttered environment, where measurements are unlabelled and may be spurious. To elaborate a little further, it was developed for solving the problem of *plot-to-track association* in a radar tracker. In this context, all of the potential candidates for association to a specific track are combined into a single statistically most likely update, taking account of the statistical distributions of both the tracking errors and the clutter, while assuming that only one of the candidates is the desired target with the rest of them representing false alarms. A major extension of the PDA filter is the joint probabilistic data association (JPDA) filter [442], [443], which takes account of the situation that multiple targets are present out of all the potential candidates, and hence seeks to compute the joint decision probabilities for the multiple targets. In addition to their wide applications in radar, sonar, electro-optical sensor networks and navigation systems [441]–[455], the PDA techniques have also been applied in the field of computer vision for solving the visual target tracking problem [456]–[459].

The PDA approach may also be applied for solving challenging problems in digital communications. For example, it

¹³Recall that the lattice perspective – many detection problems can be interpreted as the problem of finding the closest lattice point [54], [57], [427] – is also the foundation for the tree-search based MIMO detectors described in Section VIII-D.

TABLE IV
MILESTONES IN THE DEVELOPMENT OF THE TREE-SEARCH MIMO DETECTORS: DEPTH-FIRST TYPE

Year	Authors	Contributions
1981 - 1985	Pohst and Fincke [411], [412]	First proposed the SD algorithm, which is hence known as the Fincke-Pohst algorithm, for calculating vectors of short length in a lattice at a reduced complexity; this work laid the mathematical foundation of applying the SD algorithm to the MIMO detection problem.
1988 - 1990	Xie <i>et al.</i> [239], [394]	First proposed a stack sequential decoding based MUD for asynchronous CDMA systems; this detector is essentially a depth-first tree-search MIMO detector.
1993 - 1999	Viterbo <i>et al.</i> [53], [305]	Applied the depth-first SD algorithm to the ML detection of multidimensional constellations transmitted over single-antenna fading channels, which largely stimulated the research interests of tree-search based MIMO detectors.
1994	Schnorr and Euchner [413]	Proposed a more efficient variation, known as SE refinement, of the Fincke-Pohst SD algorithm; the SE-SD algorithm was based on the lattice basis reduction philosophy and represents a popular solution to the MIMO detection problem.
2001 - 2003	Hochwald <i>et al.</i> [74], [419]	Proposed a complex-valued SD and the list-SD (LSD) for a FEC-coded MIMO using IDD receiver, showing that a near-capacity performance can be achieved with the aid of a soft-SD based IDD receiver.
2002	Agrell <i>et al.</i> [54]	First proposed to use the SE refinement [413] of the Fincke-Pohst SD algorithm [411], [412] to the <i>CLPS problem</i> , and concluded that the SE enumeration technique is more efficient than the VB implementation [53] of the SD algorithm designed for MIMO detection.
2003	Damen <i>et al.</i> [57]	Proposed a pair of improved SD algorithms for finding the closest lattice point, both of which were shown to offer a significant complexity reduction compared to the VB-SD of [53] and to the SE-SD of [54].
2001 - 2005	Hassibi and Vikalo [58], [59], [415]–[417]	Analyzed the expected complexity of the SD algorithm, and concluded that the expected complexity of SD algorithm is dependent on both the problem size and the SNR; showed that when the SNR is high, the expected complexity of SD can be approximated by a polynomial function for a small problem size.
2004 - 2005	Jaldén and Ottersten [60], [418]	Further analyzed the expected complexity of the SD algorithm, and demonstrated that the expected complexity of the SD algorithm increases exponentially for a fixed SNR with a search-space, which contradicts previous claims; therefore, strictly speaking, the SD algorithm has an exponential lower bound in terms of both the expected complexity as well as the worst-case complexity, although it can be efficient at high SNRs and for problems of moderate size.
2004	Garrett <i>et al.</i> [420]	First reported the VLSI implementation of a soft-output depth-first SD based detector for a 4×4 16QAM MIMO system, achieving 38.8 Mbps over a 5-MHz channel.
2005	Burg <i>et al.</i> [61]	Proposed two ASIC implementations of depth-first MIMO SD. The first ASIC attains the ML performance with an average throughput of 73 Mb/s at an SNR of 20 dB; the second ASIC achieves a throughput of 170 Mb/s at the same SNR with only a negligible BER degradation. The proposed implementations rely on four key contributing factors to achieve high throughput and low complexity: depth-first tree traversal with radius reduction, implemented in a one-node-per-cycle architecture, the use of the l^∞ -instead of l^2 -norm, and an efficient implementation of the enumeration approach.
2008	Studer <i>et al.</i> [65]	Presented the VLSI implementation of a soft-output depth-first SD based MIMO detector, which demonstrated that single tree-search, sorted QR-decomposition, channel matrix regularization, log-likelihood ratio clipping, and imposing runtime constraints are the key ingredients for realizing soft-output MIMO detectors with near max-log performance.

may be developed as a reduced-complexity design alternative to the optimal soft-decision aided MAP detectors/equalizers of MIMO channels [104]–[133], and it is also applicable to channel estimation of MIMO systems [460], [461]. Since we mainly focus on MIMO detection in this paper, a more detailed discussion of the PDA-based MIMO channel estimation will not be included in the sequel. As far as the PDA-based MIMO detection is concerned, it is Luo *et al.* [104] who first applied the PDA approach to the MUD problem of BPSK-modulated synchronous CDMA systems in 2001, showing

a near-optimum performance at a significantly lower computational complexity than the ML detector. Thereafter, the PDA-based detector was naturally extended to the scenario of BPSK-modulated asynchronous CDMA systems [106], [107]. Recently, it was also extended to the symbol detection of QAM-aided SDM-MIMO systems [111]–[113], [116], [120], [130], striking an attractive tradeoff between the attainable performance and the complexity imposed. More specifically, in [111] a real-valued PDA (RPDA) was formulated for M -QAM constellations, which is based on the equivalent real-

TABLE V
MILESTONES IN THE DEVELOPMENT OF THE TREE-SEARCH MIMO DETECTORS: BREADTH-FIRST TYPE

Year	Authors	Contributions
1990 - 1993	Xie <i>et al.</i> [241], [395], [396]	First conceived a breadth-first K -best tree search MUD for asynchronous CDMA systems; proposed a joint signal detection and parameter estimation scheme based on their breadth-first tree search MUD.
1997	Wei <i>et al.</i> [396]	Studied both the M -algorithm and the T -algorithm based breath-first tree-search MUD in the context of CDMA systems operating in fading channels.
2002	Wong <i>et al.</i> [62]	Proposed and implemented a breadth-first K -best tree-search MIMO detector using a VLSI architecture, which is capable of achieving a decoding throughput of 10 Mb/s at 100 MHz clock frequency in a 16-QAM aided (4×4) -element SDM-MIMO system.
2004 - 2006	Guo <i>et al.</i> [63], [421]	Proposed and implemented both hard and soft SE-strategy based K -best tree-search MIMO detectors, which are capable of supporting up to 53.3 Mb/s throughput at 100 MHz clock frequency for a 16-QAM aided (4×4) -element SDM-MIMO system.
2006	Wenk <i>et al.</i> [422]	Presented a new VLSI architecture for the implementation of the K-best algorithm, which relies on a more parallel approach and the ASIC design achieves up to 424 Mbps throughput.
2007	Chen <i>et al.</i> [64]	Reported a VLSI implementation of a soft-output breadth-first tree search aided MIMO detector for a (4×4) -element MIMO system employing 64-QAM, which is capable of achieving a throughput of above 100 Mb/s.
2006 - 2008	Barbero <i>et al.</i> [80], [423]	Proposed a noise-level independent fixed-complexity K -best tree-search MIMO detector, which overcomes the two main limitations of the SD from an implementation point of view: its variable complexity and its sequential nature.
2009	Jaldén <i>et al.</i> [82]	Presented analytical study of the error probability of the fixed-complexity SD in MIMO systems having an arbitrary number of antennas, proving that it achieves the same diversity order as the ML detector, regardless of the constellation size used.
2010	Patel <i>et al.</i> [424]	Presented a VLSI architecture of a novel soft-output K-Best MIMO detector. This implementation attains a peak throughput of 655 Mbps for a 4×4 64-QAM MIMO system with 0.13um CMOS. Synthesis results in 65nm CMOS show the potential to support a sustained throughput up to 2 Gbps, which may meet the requirements of for mobile WiMAX and LTE-A standards.

TABLE VI
MILESTONES IN THE DEVELOPMENT OF THE TREE-SEARCH MIMO DETECTORS: BEST-FIRST TYPE

Year	Authors	Contributions
2004	Fukatani <i>et al.</i> [307]	Applied Dijkstra's algorithm [425] for reducing the complexity of the SD based MIMO detector at the expense of an increased storage size.
2004	Xu <i>et al.</i> [426]	Applied the stack algorithm [406] to the best-first tree search based MIMO detector.
2006	Murugan <i>et al.</i> [66]	Proposed a unified framework for tree search decoding, which encompasses all existing SDs as special cases, hence unifying the depth-first search, the breadth-first search and the best-first search based on the proposed framework.
2012	Chang <i>et al.</i> [72]	A generalization of Dijkstra's algorithm was developed as a unified tree-search detection framework; the proposed framework incorporates a parameter triplet that allows the configuration of the memory usage, detection complexity and the sorting dynamic associated with the tree-search algorithm; by tuning the different parameters, beneficial performance-complexity tradeoffs are attained and a fixed-complexity version can be conceived.
2012	Chang <i>et al.</i> [71]	First applied the A* algorithm to the best-first tree-search based MIMO detection problem.
2012	Shen <i>et al.</i> [414]	Proposed the algorithms and VLSI architectures for both the best-first soft- and hard-decision tree-search based MIMO decoders in the context of a 4×4 64-QAM system using 65-nm CMOS technology at 333 MHz clock frequency.

TABLE VII
MILESTONES IN THE DEVELOPMENT OF THE LR-BASED MIMO DETECTORS

Year	Authors	Contributions
1982	Lenstra <i>et al.</i> [434]	First proposed the LLL algorithm for LR, which becomes the most popular LR algorithm used in practice.
2002	Yao <i>et al.</i> [83]	First applied the LR technique in conjunction with the traditional linear ZF and nonlinear ZF-SIC detector, showing a substantial performance gain at a modest additional computational complexity.
2003-2004	Windpassinger and Wübben <i>et al.</i> [84], [85]	Presented LR-aided MIMO detectors relying on real-valued LLL algorithms.
2003-2004	Windpassinger <i>et al.</i> [84], [86]	Proposed a real-valued LLL-based LR algorithm, which enables the application of the algorithm in MIMO systems having arbitrary numbers of dimensions. It was also shown that LR can be favorably applied in MIMO systems that use precoding.
2004	Wübben <i>et al.</i> [85], [440]	Extended the LR-aided linear ZF and nonlinear ZF-SIC MIMO detectors to their MMSE based counterparts.
2007	Taherzadeh <i>et al.</i> [87]	Demonstrated that the LLL based LR algorithm is capable of achieving full receive diversity of MIMO decoding.
2007-2008	Ling and Jaldén <i>et al.</i> [88], [89]	Provided upper bounds for the average computational complexity of the LLL algorithm, namely $\mathcal{O}(N_t^3 \log N_t)$ and $\mathcal{O}(N_t^2 \log \frac{N_t}{N_r - N_t + 1})$, respectively.
2007-2008	Seethaler and Zhang <i>et al.</i> [90], [91]	Studied the performance of the Seysen's algorithm based LR techniques in MIMO detection problems.
2007	Burg <i>et al.</i> [92]	The first VLSI implementation of the LR technique relying on Brun's algorithm was reported.
2008	Shabany <i>et al.</i> [93]	Presented a VLSI implementation of the LR-aided K -best MIMO detector.
2008	Gestner <i>et al.</i> [94]	The first VLSI implementation of the LR technique relying on the complex-valued LLL algorithm was reported.
2005-2009	Gan and Ma <i>et al.</i> [95]–[98]	Proposed a number of complex-valued LLL algorithms which can be directly used in the complex-valued MIMO system model.
2006 - 2010	Silvola, Qi, Ponnampalam and Zhang <i>et al.</i> [99]–[102]	Studied a range of LR-aided soft-output MIMO detectors, including LR aided K -best [100], LR-aided MAP [99], LR-aided fixed radius algorithm, fixed candidates algorithm, fixed memory-usage algorithm etc. [102].
2013	Zhou <i>et al.</i> [103]	Proposed a class of element-based LR algorithms, which reduce the diagonal elements of the noise covariance matrix of linear detectors and thus enhance the asymptotic performance of linear detectors, in large-scale MIMO systems having hundreds of BS antennas.

valued MIMO signal model previously discussed in Section VII. Additionally, in [112] an approximate complex-valued PDA (A-CPDA) detector was proposed, in which the complex-valued Gaussian distribution is approximately characterized by a matched mean and a matched covariance only. Furthermore, the pseudo-covariance, as defined by Neeser and Massey in [287], was employed in [120] to fully characterize the complex-valued Gaussian distribution, and the resultant formulation of complex-valued PDA (CPDA) [120] was shown to outperform both the RPDA [111] and the A-CPDA [112].

In these PDA-based MIMO detectors/equalizers, the probabilities of the potential candidate symbols serve as the soft input/output information and are typically estimated relying on a self-iterative process. The key operation in this process is the iterative approximation of the interference-plus-noise term obeying a *multimodal Gaussian mixture* distribution by an *ever-updated* multivariate Gaussian distribution [104], [111]–[113], [129]. Therefore, the performance of the PDA based MIMO detectors is largely determined by the accuracy of the iterative Gaussian approximation, whose impact on the performance of the PDA based detectors was investigated in [116]. In order to further improve the accuracy of the

Gaussian approximation, the authors of [127] proposed a PDA detector for correlated source bits using the joint detection of multiple consecutive symbol vectors. Additionally, in [130], [462] a unified direct bit-based PDA approach was proposed for detecting linear mapping based high-order rectangular QAM symbols, which achieves a better performance at a lower computational complexity than the CPDA detector of [120]. Furthermore, the PDA based iterative receiver design of FEC-coded MIMO systems was investigated in [132], [133], [463], [464], where it was revealed that the outputs of the conventional PDA detectors in [104], [111], [112], [120], [127], [130] are indeed the normalized symbol likelihoods, rather than the true APPs. Based on this insight, a pair of PDA based MIMO iterative receivers, namely the approximate and the exact Bayesian theorem based iterative PDA receivers were proposed in [132], [463] and [133], [464], respectively. Additionally, a distributed soft combining based PDA receiver was conceived in [131], [205] for BS cooperation aided multi-cell multiuser MIMO systems.

The advantages of the PDA based detectors are summarized as follows.

- First, it may achieve a near-optimal detection perfor-

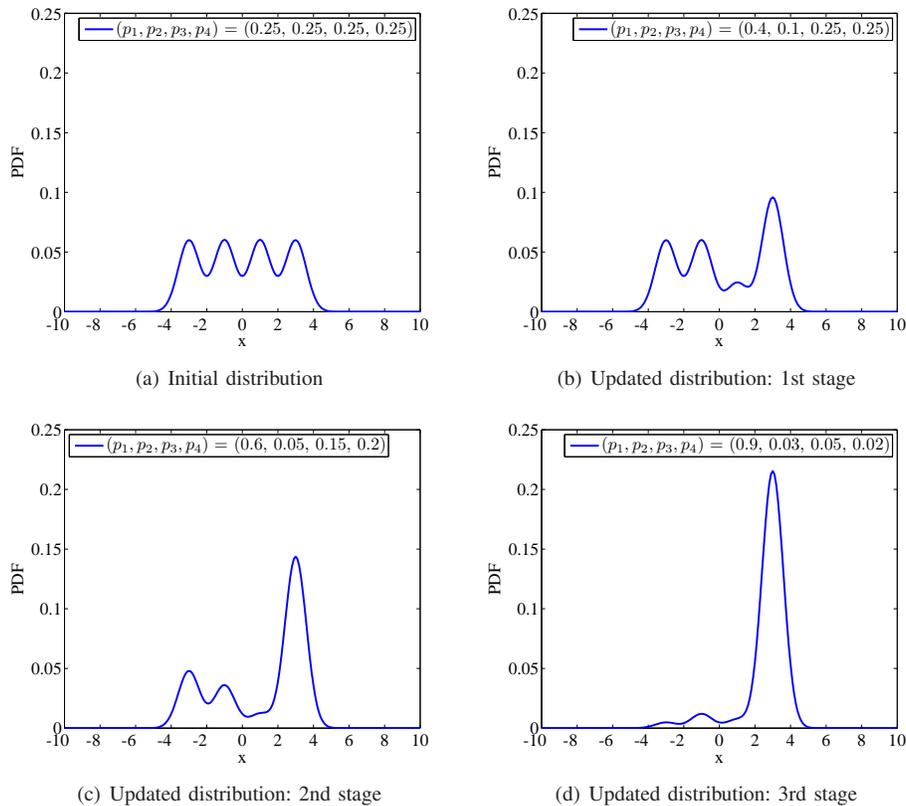


Fig. 23. The basic principle of the PDA based MIMO detectors: An example process of approximating a single-variate four-modal Gaussian mixture distribution by a single Gaussian distribution.

mance in certain circumstances, for example in the context of FEC-uncoded CDMA systems [104]–[107].

- Second, it has a low complexity that increases no faster than $O(N_I^3)$ per symbol vector, where N_I represents either the number of users in CDMA [104]–[107], or the number of transmit antennas in multi-antenna aided MIMO systems [111], [112], [120].
- Third, it is inherently a soft-input soft-output algorithm, which is eminently applicable in combination with FEC codes such as convolutional codes, turbo codes [465], [466] or low-density parity-check (LDPC) codes [467], [468].
- Furthermore, the higher the number of transmit antennas or users, the better its performance, provided that the channel is not overloaded ($N_I > N_O$) or rank-deficient [116]. However, due to its nature of approximation and iteration, the PDA based MIMO detector has not been well-understood compared to other mature MIMO detectors.

For the sake of more explicitly clarifying the fundamental principle of the PDA based MIMO detector, its Gaussian approximation process is conceptually illustrated in Fig. 23, which is based on the assumption that the interference-plus-noise term to be processed by the PDA detector obeys a single-variate multimodal (four-modal) Gaussian mixture distribution of $p_M(x) = p_1 \times f_1(x) + p_2 \times f_2(x) + p_3 \times f_3(x) + p_4 \times f_4(x)$. Here, the “single variate” assumption indicates that only a

single interfering symbol, say s_i , exists for the other symbol to be detected. In other words, a (2×2) -element VBLAST system is assumed. More specifically, the four-modal distribution observed in Fig. 23 stands for the case of a 4PAM-like scenario, which is a simplified real-valued example for M -QAM. More specifically, $p_M(x)$ is constructed by a mixture of four constituent Gaussian distributions $f_1(x)$, $f_2(x)$, $f_3(x)$, $f_4(x)$ having the same variance, but different means of $m_1 = -3$, $m_2 = -1$, $m_3 = +1$, $m_4 = +3$ and different constituent probabilities of p_1 , p_2 , p_3 , p_4 . The four constituent probabilities correspond to the different probabilities that an interfering symbol has the value $s_i = -3$, $s_i = -1$, $s_i = +1$ and $s_i = +3$, respectively.

The main contributions to the development of the PDA based MIMO detectors are summarized in Table VIII.

G. Semidefinite Programming Relaxation Based Detectors

In contrast to other MIMO detectors, the SDPR approach relies on a relaxation of the optimum MIMO detection problem to the mathematical model of semidefinite programming (SDP) [309], [310], [469], which is a subfield of convex optimization theory [470].

Convex optimization constitutes a subfield of the generic mathematical optimization problem. It studies the minimization of a convex objective function over convex sets. Fig. 24 illustrates the basic framework of solving mathematical optimization problems using convex optimization. If a

TABLE VIII
MILESTONES IN THE DEVELOPMENT OF THE PDA-BASED MIMO DETECTORS

Year	Authors	Contributions
2001	Luo <i>et al.</i> [104]	First applied the PDA filter technique to the MUD problem of synchronous CDMA systems, showing a near-optimum performance at a significantly reduced complexity.
2002	Pham <i>et al.</i> [106]	Proposed a PDA-Kalman MUD approach for asynchronous CDMA systems.
2003	Luo <i>et al.</i> [107]	Conceived a sliding-window PDA based MUD approach for asynchronous CDMA systems.
2003	Tan <i>et al.</i> [108]	Designed a PDA-based IDD receiver for a coded CDMA system using BPSK modulation.
2004	Pham <i>et al.</i> [111]	Extended the PDA detector to SDM-MIMO systems based on a real-valued signal model.
2004	Liu <i>et al.</i> [112]	Proposed a PDA-based soft equalization scheme for frequency-selective MIMO channels.
2005	Liu <i>et al.</i> [113]	Extended the PDA-Kalman MUD approach of [106] to the soft equalization of frequency-selective MIMO channels.
2005	Latsoudas <i>et al.</i> [114]	Proposed a hybrid MIMO detector that combined the SD and the PDA detectors.
2005	Fricke <i>et al.</i> [116]	Studied the impact of Gaussian approximation on the performance of the PDA based MIMO detector.
2006	Jia <i>et al.</i> [120]	Proposed a complex-valued PDA (CPDA) detector which takes the pseudo-covariance into account during the derivation of the complex-valued PDA detector.
2008	Kim <i>et al.</i> [126]	Applied the PDA method as a component of an iterative receiver designed for non-coherent MIMO systems.
2008	Yang <i>et al.</i> [127]	Proposed a PDA detector for correlated source bits using joint detection of multiple consecutive symbol vectors.
2009	Mohammed <i>et al.</i> [128]	Applied the PDA algorithm to the problem of decoding large non-orthogonal space-time block codes (STBCs).
2011	Yang <i>et al.</i> [130]	Proposed a unified direct bit-based PDA approach for detecting linear mapping based high-order rectangular QAM symbols, achieving a better performance at a lower computational complexity than the CPDA detector of [120].
2011	Yang <i>et al.</i> [131]	Proposed a distributed soft combining based PDA receiver for BS cooperation aided multi-cell multiuser MIMO systems.
2013	Yang <i>et al.</i> [132], [133]	Investigated the PDA based iterative receiver design for FEC-coded MIMO systems: revealed that the outputs of the conventional PDA detectors are indeed the normalized symbol likelihoods rather than the true APPs; proposed a pair of PDA based MIMO iterative receivers, namely the approximate and the exact Bayesian theorem based iterative PDA receivers.

mathematical optimization problem is identified as a convex optimization problem, it is mathematically regarded as an easy problem, because powerful numerical algorithms, such as the interior-point methods [471], exist for efficiently finding the optimal solution of convex problems. Therefore, in mathematical optimization theory, the dividing line between the family of easy and difficult problems is convex versus nonconvex, rather than linear versus nonlinear. In other words, convex optimization problems are efficiently solvable, whereas nonconvex optimization problems are generally difficult to solve. Convex optimization has a range of other important properties. For example, in convex optimization problems, every locally optimal solution constitutes the globally optimal solution, hence there is no risk of being trapped in a local optimum. Additionally, a rigorous optimality condition and

a duality theory exist for verifying the optimal nature of a solution in convex optimization problems. For more details of convex optimization, please refer to [310], [470].

The SDPR based MIMO detectors have recently received substantial research attention [134]–[146]. The most attractive characteristic of the SDPR-aided detectors is that they guarantee a so-called polynomial-time¹⁴ worst-case computational complexity, while achieving a high performance in certain circumstances. Most of the existing SDPR detectors are dependent on the specific modulation constellation. To elaborate a little further, SDPR was first proposed for a BPSK-modulated CDMA system [134], [135], [472]–[475], and then it was extended to quadrature phase-shift keying (QPSK) [136]. Simulation results showed that the SDPR detector is capable

¹⁴The computational complexity increases as a polynomial function of N_I .

TABLE IX
MILESTONES IN THE DEVELOPMENT OF THE SDPR-BASED MIMO DETECTORS

Year	Authors	Contributions
2001 -2003	Tan <i>et al.</i> [134], [472], Ma <i>et al.</i> [135], [473], and Wang <i>et al.</i> [474], [475]	These authors independently proposed a SDPR based MUD for BPSK-modulated synchronous CDMA systems; the eigen-decomposition based method of [134], [472], [474], [475] and the randomization method of [135], [473] were proposed for converting the continuous-valued solution of the SDP problem into the binary decision output. Additionally, a cutting plane method was introduced for further improving the performance of the SDPR detector for systems supporting a large number of users [134], [472]; it was shown that the classic MUDs, such as the linear ZF/MMSE detector, can be interpreted as degenerate forms of the SDPR based MUD [135], [473].
2003	Steingrímsson <i>et al.</i> [476]	Proposed a soft SDPR detector for an IDD receiver of QPSK-aided MIMO systems employing LDPC codes.
2004	Ma <i>et al.</i> [136]	Conceived a SDPR based MUD for BPSK/QPSK aided asynchronous CDMA systems with multiple receive antennas in frequency-selective fading environments; based on a flexible block alternating likelihood maximization (BALM) principle, the large-scale ML detection problem was decomposed into smaller subproblems, and each subproblem was solved by the SDPR detector.
2003 -2004	Luo <i>et al.</i> [139] and Ma <i>et al.</i> [140]	Proposed SDPR detectors for general M -PSK aided synchronous CDMA systems.
2005	Kisialiou <i>et al.</i> [137]	Provided the first analytical study of the SDPR detector for BPSK-aided MIMO systems; it was shown that the SDPR detector is capable of achieving the same BER performance as that of the ML detector in high-SNR scenarios, while at the low SNR region, the SDPR detector serves as a constant factor approximation to the ML detector in large systems.
2005	Wiesel <i>et al.</i> [141]	Designed a PI-SDPR detector for 16-QAM aided MIMO systems, which can be extended to high-order M -QAM scenarios.
2006	Sidiropoulos <i>et al.</i> [143]	Advocated a BC-SDPR detector for employment in high-order M -QAM aided MIMO systems.
2007	Mao <i>et al.</i> [145]	Proposed a VA-SDPR detector for M -QAM aided multicarrier CDMA(MC-CDMA) systems; the method can directly operate at the bit-level in the context of linear mapping based M -QAM.
2007	Mobasher <i>et al.</i> [144]	Studied several variants of the SDPR detectors, and showed that it is possible to further improve the SDPR detector's performance by increasing their complexity.
2008	Jaldén <i>et al.</i> [138]	Analytically demonstrated that the SDPR based detector is capable of achieving full receive diversity order in BPSK-aided real-valued MIMO channels.
2009	Ma <i>et al.</i> [146]	Demonstrated that the PI-SDPR of [141], the BC-SDPR of [143], and the VA-SDPR of [145] are actually equivalent in the sense that they obtain the same symbol decisions, and hence exhibit an identical SER performance.
2013	Yang <i>et al.</i> [147]	Proposed a bit-based SDPR detector capable of directly detecting the nonlinear Gray mapping aided rectangular high-order QAM symbols, where the unequal error protection property (UEP) of QAM bits was exploited and the resultant SDPR detector outperforms that of [145].

of achieving a near-ML BER performance, when using BPSK [134] and QPSK [136]. The numerical and analytical results of [137], [138] confirmed that the SDPR detector achieves the maximum possible diversity order, when using BPSK for transmission over a real-valued fading MIMO channel. The SDPR approach was also further developed for high-order modulation schemes, such as for M -ary PSK scenario in [139], [140], and for high-order rectangular QAM in [141]–[145]. As for the high-order QAM scenario, it was recently shown in [146] that the so-called polynomial-inspired SDPR

(PI-SDPR) [141], the bound-constrained SDPR (BC-SDPR) [143] and the virtually antipodal SDPR (VA-SDPR) [145] are actually equivalent in the sense that they arrive at the same symbol decisions, and hence they exhibit an identical

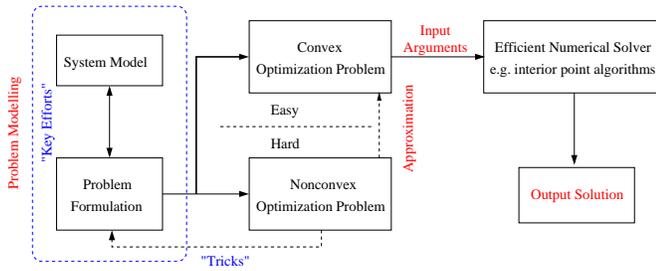


Fig. 24. Framework of solving problems using convex optimization.

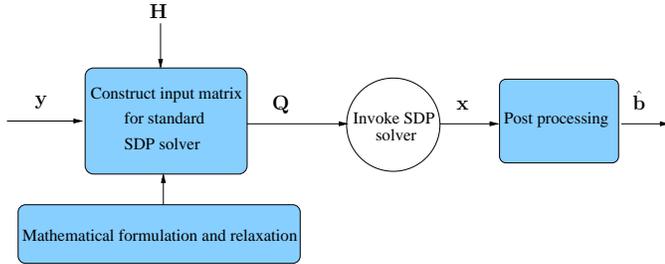


Fig. 25. The basic principle of the SDPR based MIMO detectors.

SER performance.¹⁵ Furthermore, a bit-based SDPR detector capable of directly detecting the nonlinear Gray mapping aided rectangular high-order QAM symbols was proposed in [147], where the unequal error protection property (UEP) of QAM bits was exploited and the resultant SDPR detector was shown to outperform that of [145]. It should be noted, however, that for high-order modulation scenarios, the performance of the SDPR detectors is not as promising as that of the BPSK/QPSK scenario. Therefore, there is a need to further improve the performance of the SDPR based MIMO detector designed for high-order QAM constellations, while maintaining its appealingly low computational complexity. The basic principle of SDPR based detectors is illustrated in Fig. 25, where the blue boxes represent the technical challenges. Furthermore, the main contributions to the development of the SDPR based MIMO detectors are summarized in Table IX.

H. Detection in Rank-Deficient and Overloaded MIMO Systems

For MIMO detection, typically it is preferable to have a full-rank channel matrix, namely $\text{rank}(\mathbf{H}) = N_I$ or N_O . In CDMA systems, this requirement may be satisfied by using well-designed spreading codes. In multi-antenna SDM systems, when an ideal rich scattering multipath environment is assumed, typically independently fading communications channels are encountered between each transmit/receive antenna pair. Then, the full-rank requirement may also be satisfied. However, in some propagation scenarios, the channel matrix \mathbf{H} may not be of full-rank. For example, if the spatial

¹⁵More specifically, the solution equivalence of the PI-SDPR and BC-SDPR schemes holds for 16-QAM and 64-QAM, while that between the BC-SDPR and VA-SDPR techniques holds for any 4^q -QAM scheme, where q is a positive integer. The SDPR QAM detector of [144] exhibits a better performance than that of [141], [143], [145], but has a much higher complexity.

separation between the antenna elements of the transmitter and/or the receiver is not large enough and hence the angular spread is small, the strong correlation between the antenna elements results in a rank-deficient channel matrix, i.e. we have $\text{rank}(\mathbf{H}) < \min(N_t, N_r)$. Hence, the spatial degrees of freedom available are reduced, which translates into a decreased MIMO capacity [477]–[482]. Furthermore, even if the spatial separation between antenna elements is sufficiently large, it is still possible that \mathbf{H} is rank-deficient. This is due to the so-called “keyhole/pinhole effects” [482]–[487], which may be simply understood as a diffraction phenomenon, where a large obstacle with a small keyhole punched through it is placed between the MIMO transmitter and receiver, hence the only channel the radio wave can propagate through to the receiver is the keyhole. Due to this effect, the channel matrix \mathbf{H} is degenerate and has only a single degree of freedom, i.e. we have $\text{rank}(\mathbf{H}) = 1$, even though the entries of \mathbf{H} are uncorrelated.

Another preferable condition for the detection in CDMA and SDM-MIMO systems is that the system is *not* overloaded. Then, the channel matrix is “fat” and does not have full column-rank (but it may still have full row-rank.). In the multi-antenna scenario, this means that $N_t \leq N_r$, while in CDMA systems, it means that the number of users is higher than the dimension of the signal space/the processing gain of the system. As far as MIMO detection is considered, both the rank-deficient scenario discussed above and the overloaded scenario face the common challenge that the standard versions of most of the representative MIMO detectors, such as the linear ZF/MMSE detector, the ZF/MMSE-SIC detector and the original linear-decorrelation based PDA detector [104], [111] that invoke the inverse of \mathbf{H} , and the standard SD detector that invokes standard QRD or Cholesky’s factorization [53], usually provide an unacceptably poor performance, because they are invoked for finding the solution of an under-determined linear system subject to random noise.

Several strategies have been proposed to circumvent this predicament, such as the “pseudo-inverse” based linear detection [167], [226], the group detection [488]–[493], the generalized SD detector [56], [57], [494]–[501], the modified non-decorrelated PDA detection [112], [116], [121], [130], the modified SDPR detection [147], [500], [502], the metaheuristics based detection [503]–[524] etc. It is possible to design various scenario-dependent MIMO detectors for the rank-deficient and overloaded MIMO systems. However, it seems that the group detection strategy [488]–[493] and the search-based detection, regardless of the ML detector, the generalized SD detector [56], [57], [494]–[501] and the metaheuristics based detector [503]–[524], are particularly suitable for rank-deficient and overloaded MIMO scenarios.

I. Impact of Soft-Decision and Transmit Preprocessing on MIMO Detection

In previous sections we aim for understanding the fundamental properties of MIMO detection algorithms. However, if we look at the entire process of communication, the assumption that only the receiver is responsible for signal

recovery represents a passive and incomplete strategy. In fact, almost all practical systems invoke some form of encoding or transmit preprocessing, such as FEC, space-time coding and precoding/beamforming, to actively improve the performance of signal recovery or to reduce the detector's computational complexity from the transmitter side.

To elaborate a little further, when FEC is used, tremendous efforts have been devoted to designing soft-input soft-output MIMO detectors that can fit into the powerful "turbo processing principle" [465], [466], [525]–[527] based IDD receiver architecture conceived for achieving near-optimum performance. All the MIMO detectors reviewed in Section VIII have their soft-decision versions to fit into IDD receivers. The representative contributions to iterative MIMO detection and decoding include: the optimal MAP detector based iterative receiver [528]–[532], the expectation-maximization (EM) algorithm based soft-decision MUD [533], the soft-decision MMSE detector assisted iterative receiver [534]–[536], the soft-decision SD based MIMO iterative receiver [65], [73], [74], [81], [499], [537], the PDA detector based iterative receiver [108], [125], [132], [133], the soft-decision SDPR detector aided MIMO iterative receiver [476], [538], the soft-decision multiple symbol differential SD (MSDSD) detector based non-coherent iterative receiver [539], and the soft-decision iterative receiver for LS-MIMO systems [326], [414] discussed in Section IX. Yet another important contribution to IDD design is the extrinsic information transfer (EXIT) chart invented by ten Brink [540], [541], which is a powerful tool conceived not only for analyzing the convergence behavior of iterative receivers, but also for assisting near-capacity wireless system design [74], [77], [542]–[551]. For more details on designing iterative MIMO receivers, please refer to [74], [529], [531], [534], [552]–[555].

Additionally, when space-time coding is employed, as we discussed in Section IV, the optimal ML decoding can be implemented with a simple separate symbol-by-symbol decoding strategy for orthogonal STBCs and with a linear-complexity pairwise decoding strategy for quasi-orthogonal STBCs [261]. As a result, the MIMO detection problem does not constitute a grave challenge for STBC aided MIMO systems. Similarly, when precoding/beamforming techniques [84], [556]–[562] are employed in SDM-MIMO systems, the interference between the transmit antennas may be significantly mitigated or even completely removed (when using ZF-based linear precoding). As a result, the signal detection task of a precoded MIMO system becomes less challenging compared to that of SDM-MIMO systems invoking no preprocessing. The key insight gained here is that we can design an encoder or precoder to improve the performance or to reduce the computational complexity of decoders/detectors.

J. Guidelines on Choosing the Right MIMO Detectors

As we mentioned in Section VIII-A2, the optimality of MIMO detectors strongly depends both on the criteria of "goodness" and on the assumptions made for specific application scenarios. Each type of MIMO detector has a different

performance-and-complexity profile¹⁶, and each of them has its own pros and cons. Therefore, in general there is no simple answer as to which algorithm is the best. In what follows, we aim for providing a qualitative comparison of the performance and complexity characteristics of the MIMO detectors reviewed.

- The MAP/ML based MIMO detectors relying on brute-force search have the optimal VER performance (not necessarily optimal BER or SER) and a computational complexity which increases exponentially with the system's dimension (e.g. the number of transmit antennas or users). Naturally, their computational complexity order $\mathcal{O}(M^{N_t})$ is the highest amongst all the MIMO detectors. Additionally, the MAP/ML algorithms have to be aware of the amplitudes of the transmitted symbols for calculating the decision statistics. However, the MAP/ML detector is insensitive to channel imperfections and rank-deficiency/overloading, and it has the best possible error probability performance across the entire SNR region. When the system's dimension is not too large, it remains possible to implement the exact MAP/ML algorithm in practical systems with the aid of state-of-the-art VLSI technologies.
- The linear MIMO detectors typically have the lowest computational complexity between $\mathcal{O}(N_t^2)$ and $\mathcal{O}(N_t^3)$, although there exist subtle differences amongst the computational complexities of different linear detectors. Naturally, in general they have the least attractive error probability performance. However, in some scenarios, such as the large-scale MIMO systems to be detailed in Section IX, where the receiver side has a significantly higher number of antennas than the transmitter side, the linear MF, ZF, MMSE, MBER etc. based MIMO detectors may achieve a near-ML error probability. Additionally, the linear MF and ZF detectors only have to know the channel matrix \mathbf{H} , but the linear MMSE detector additionally has to estimate the noise variance. Furthermore, as indicated in Section VIII-A2, the linear ZF detector is preferable in interference-dominated scenarios, the linear MF detector is preferable in noise-dominated scenarios, while the linear MMSE detector provides the highest SINR amongst all linear detectors, which makes it preferable in scenarios where the noise and the interference have a comparable level. Finally, the linear ZF and MMSE detectors exhibit an inadequate performance in rank-deficient/overloaded systems, where the number of independent inputs is higher than the dimension of the received signals, while the linear MF detector remains applicable.
- The interference cancellation based MIMO detectors have a computational complexity between $\mathcal{O}(N_t^3)$ and $\mathcal{O}(N_t^4)$, and typically they have a much more attractive error probability performance than the linear detectors. Theoretically, the SIC/DFD based detectors are capable of

¹⁶Generally, "performance" and "complexity" may be interpreted in various ways. For example, the "performance" can be error probability, robustness to system imperfections, configuration flexibility, application generality etc., while the "complexity" could be computational complexity, hardware/silicon complexity and so on.

approaching the Shannon capacity, provided that there is no error propagation at any of the decision stages. By contrast, the PIC/MIC based detectors do not have this property. Compared to PIC/MIC, the SIC/DFD detectors are more sensitive to error propagation. However, this makes them preferable in the “near-far” scenario, where the powers of different users are significantly different, such as those of the cell-center user and cell-edge user. Furthermore, the SIC/DFD detectors may have a higher processing delay than the PIC detectors. Additionally, similar to the linear ZF and MMSE detectors, the interference cancellation based detectors are not generally applicable to the rank-deficient/overloaded scenarios.

- The tree-search based MIMO detectors, especially the K -best detectors, have the flexibility to achieve different error probability versus computational complexity trade-offs. They are even capable of attaining the optimum ML performance at a reduced complexity. In contrast to other types of MIMO detectors, the tree-search based detectors typically have a non-deterministic complexity, which is a challenge for hardware implementation, albeit it is possible to design fixed-complexity tree-search detectors. Therefore, the average computational complexity, worst-case computational complexity and even the computational complexity distribution become important complexity metrics to consider. Note, however, that theoretically the tree-search based MIMO detectors still have an exponentially increasing worst-case/average computational complexity, in which case the exponent depends on different system parameters, such as the noise variance. As a result, the tree-search based detectors may not be suitable for low-SNR scenarios. Additionally, it may be possible to design tree-search based detectors for rank-deficient/overloaded scenarios. Furthermore, the tree-search based detectors rely on specific enumeration strategies, which by nature are not suitable for large-scale MIMO systems that have a high number of inputs.
- The LR algorithms constitute a family of powerful preprocessing techniques conceived for improving the “quality” of the effective channel matrix. They can be used in conjunction with all the other MIMO detectors. Since practically usable LR algorithms, such as the LLL algorithm, have a polynomially increasing computational complexity, the LR-aided MIMO detectors do not have a significantly increased total computational complexity. Hence, LR may be particularly useful for designing high-performance MIMO detectors maintaining a low complexity, which is critical in numerous practical implementations. However, the LR techniques do not fundamentally change the pros and cons of their baseline detectors.
- Compared to the other MIMO detectors mentioned above, the SDPR and PDA based MIMO detectors are not well-understood at the time of writing and they have not achieved the same degree of practical success, which is partially indicated by the lack of VLSI implementations of these two types of detectors. Although SDPR detectors have a favorable worst-case polynomial complexity, which is between $\mathcal{O}(N_t^{3.5})$ and $\mathcal{O}(N_t^{6.5})$, their achievable

error probability performance becomes less attractive for high-order modulations (but they may achieve near-ML performance for BPSK and QPSK constellations). The Gaussian-mixture approximation based PDA detectors operate in a way similar to the classic soft interference cancellation, hence their computational complexity is similar to that of the soft SIC detectors, i.e. typically on the order between $\mathcal{O}(N_t^3)$ and $\mathcal{O}(N_t^4)$. As a result, the PDA detectors are also sensitive to error propagation, whilst exhibiting the nice property of preferring a large number of inputs, provided that the receive dimensions are no less than that of the inputs. Hence, for certain large-scale MIMO scenarios, both SDPR and PDA based detectors may be attractive. Finally, for large-scale MIMO systems which have a similarly large number of transmit and receive antennas, it might be valuable to resort to metaheuristics based algorithms, since all the other MIMO detectors might either be excessively complex or fail to provide a high performance. Some of the metaheuristics based large-scale MIMO detectors are described in Section IX-D.

IX. DETECTION IN LS-MIMO SYSTEMS

Having reviewed the representative families of MIMO detection algorithms in Section VIII, let us now shift our attention to the detection problem encountered in the emerging massive/LS-MIMO systems [25], [354], [563], where dozens or even hundreds of antennas may be invoked and an unprecedented spectral efficiency/diversity order may be achieved. The major benefits of LS-MIMOs can be deduced from the following well-known results. For transmission over a quasi-static channel where a codeword occupies only a single coherence-time and coherence-bandwidth interval, the outage probability of a point-to-point MIMO link scales according to

$$\Pr_{outage} \propto \text{SNR}^{-N_t N_r}, \quad (24)$$

which indicates that potentially a diversity order of $(N_t \times N_r)$ may be achieved. In other words, the MIMO link’s reliability quantified in terms of its error rate falls exponentially with N_t and/or N_r when SNR increases. Additionally, on a fast-fading MIMO channel, the achievable rate scales as

$$\min\{N_t, N_r\} \log_2(1 + \text{SNR}), \quad (25)$$

which indicates that the achievable rate of a MIMO system scales linearly with $\min\{N_t, N_r\}$, and hence it is possible to attain a high data rate using a large N_t and N_r . In conclusion, fundamentally, using more antennas grants us higher degrees of freedom in the spatial domain without increasing the bandwidth occupied.

The LS-MIMO systems can be implemented in a variety of ways. For example, in the operational 3G/4G wireless communication systems, a point-to-point LS-MIMO system might be constructed to provide high-throughput wireless backhaul connectivity between the BSs by using a large number of antennas at each BS. However, apart from this particular application, it is typically quite challenging to construct a point-to-point LS-MIMO system where the antenna

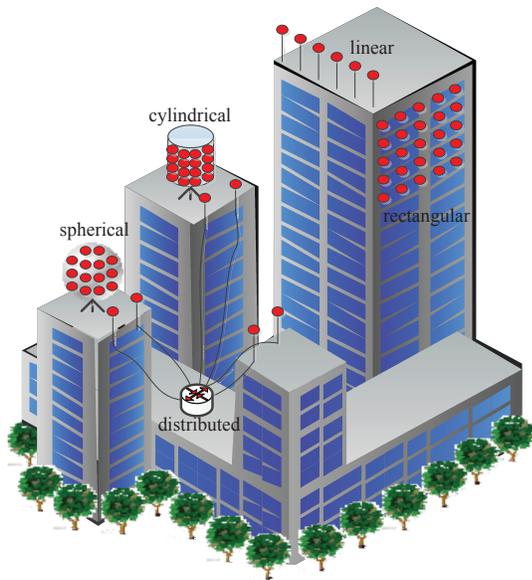


Fig. 26. Typical antenna array configurations and deployment scenarios of LS-MIMO systems [569].

elements can have a sufficiently high spatial separation to guarantee a well-conditioned channel matrix. Furthermore, achieving the attractive multiplexing gains promised by point-to-point LS-MIMO schemes requires a high SNR. On the other hand, a multiuser LS-MIMO system [564], [565] can be envisaged, where the BS may be equipped with hundreds of antenna elements and serves dozens of MSs each having only a few antennas. Additionally, the LS-MIMO may be implemented in the extremely high frequency (EHF) band (i.e. at millimeter wave (MMW) frequencies ranging from 30 to 300 GHz and having wavelengths spanning from ten to one millimeter [33]). They may also be considered in the optical band for frequencies ranging from 300 GHz to 300 PHz and including the infrared, the visible and the ultraviolet band [566], [567]. Due to the adverse propagation properties, the coverage of the LS-MIMO systems operating in these high-frequency bands might be significantly limited, hence they are more applicable to indoor environments [566] or small-cell scenarios [568]. For the sake of more explicit clarity, several typical antenna configurations and deployment scenarios of LS-MIMOs are illustrated in Fig. 26 [569]. To elaborate a little further, the simplest linear array propagates signals on the two-dimensional plane and it typically occupies a large physical area. By contrast, the rectangular, cylindrical and spherical arrays are capable of radiating signals to any directions in the three-dimensional space. These antenna arrays are more complex, but also more compact, hence occupying a smaller physical area. Additionally, a virtual LS-MIMO may be constructed relying on distributed antenna arrays, which may be exploited to enhance the indoor coverage or outdoor cooperation [569].

As pointed out in Section VIII-A, the key motivation of studying the fundamental MIMO detection problem is that the

computational complexity of the optimum ML/MAP MIMO detection increases exponentially with the problem size. Therefore, in principle the MIMO detection problem has intrinsically embedded the “large-scale” concept. In this regard, people may argue that the detection in LS-MIMO systems is not a novel problem, and consequently the detectors conceived for LS-MIMO systems might have no significant difference with respect to the existing MIMO detectors, except for the associated larger problem size. At first glance, this seems to be true. However, due to the limitations of practical applications, in the past large-scale MIMO systems have been regarded as being impractical and most of the research focused on small-scale MIMO systems. Nonetheless, in addition to their significant link reliability and throughput benefits, the LS-MIMO systems have been shown to enjoy some distinct advantages that are not available in small-scale MIMO systems. These benefits are mainly attributed to a range of relevant results in random matrix theory [570], [571], and might be capable of circumventing signal processing problems in LS-MIMO systems. As a result, insights drawn from the detection in small-scale MIMO systems might have to be carefully adapted for the large-scale MIMO environments. Depending on the application scenarios considered, the detection problem of large-scale MIMO systems may be categorized as follows.

A. Detection in Single-Cell/Noncooperative Multi-Cell LS-MIMO Systems

In a single-cell/noncooperative multi-cell MIMO system the BS is not concerned about the CCI imposed by the transmissions of other cells. In this scenario, as pointed out in Section III, the detection problems encountered in both the point-to-point MIMOs (see Fig. 8) and the multiple-access MIMOs (see Fig. 9) can be characterized using the same received signal model of (1). From the antenna configuration point of view, there are two types of single-cell/noncooperative multi-cell LS-MIMO systems. As shown in Fig. 27, in the Type-I system, a large number of *collocated* antennas may be mounted on the receiver, and *also* a large number of *collocated or distributed* antennas are used at the transmitter. Mathematically, the antenna configuration of the Type-I system may be characterized by

$$\lim_{N_t, N_r \rightarrow \infty} \frac{N_t}{N_r} = c \quad (26)$$

with c being a positive constant. (26) indicates that both N_t and N_r tend to infinity at the same rate. By comparison, in the Type-II system, *only* the receiver is equipped with a large number of collocated antennas, while the total number of active antennas at the transmit side is significantly smaller. Hence, the antenna configuration of this system may be characterized as

$$\lim_{N_r \rightarrow \infty} \frac{N_t}{N_r} = 0. \quad (27)$$

For the Type-I system, it has been shown that the empirical distribution of the singular values of the random channel matrix \mathbf{H} converges to a deterministic limiting distribution¹⁷

¹⁷This limiting distribution is the so-called *quarter circle law* [44, Chapter 8.2].

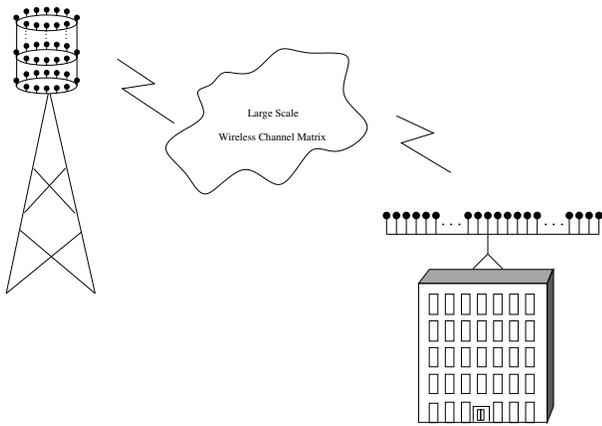


Fig. 27. An example of Type-I (point-to-point) LS-MIMO systems.

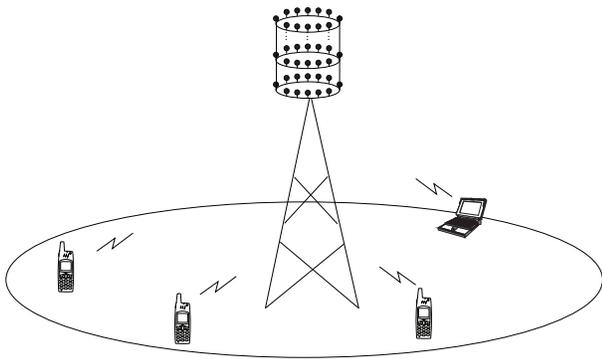


Fig. 28. An example of Type-II (multiuser) LS-MIMO systems.

for almost all realizations of \mathbf{H} , which is a result of the Marčenko and Pastur law [572]. In other words, as \mathbf{H} becomes larger (in terms of both N_t and N_r), its singular values become less sensitive to the actual distributions of the i.i.d. entries of \mathbf{H} , and the channel becomes more and more deterministic. The Marčenko and Pastur law also shows that as the size of \mathbf{H} increases, the diagonal entries of $\mathbf{H}^H \mathbf{H}$ become increasingly larger in magnitude than the off-diagonal entries. This is the so-called “channel-hardening” behavior, which may be exploited for large-scale MIMO detection. To be more specific, the matrix inversion invoked by many MIMO detectors such as the ZF-aided detector, the MMSE-aided detector and the PDA-aided detector etc., may be conveniently approximated using the series expansion technique for large-dimensional random matrices [375]. Additionally, the channel-hardening phenomenon may allow low-complexity detection algorithms to achieve a good performance for large-scale MIMO systems [573].

The Type-II system essentially deals with the MIMO detection problem encountered on an *underloaded* uplink,¹⁸ as shown in Fig. 28. On the one hand, since the number of BS antennas may be significantly higher than the total number of active MS antennas, a very unbalanced antenna configuration

¹⁸On the downlink, large-scale MIMO precoding techniques may be employed, which facilitates the employment of simple receivers at each MS, because the precoder is capable of eliminating the IAI at the transmitter with the aid of accurate channel knowledge.

is encountered, which results in a high receive diversity order. In the extreme case shown by (27), the receive diversity gain obtained is so high that the impact of both the MUI and the noise diminishes. Additionally, the channel vectors associated with distinct MSs may become asymptotically orthogonal. Furthermore, another beneficial result of the Marčenko and Pastur law [572] is that very tall (with large N_r) and very wide (with large N_t) channel matrices \mathbf{H} are very *well conditioned*. Therefore, in the Type-II system, even the simplest MF detector is capable of achieving a near-optimum performance [354], [563]. Similarly, when considering the precoding based downlink of the single-cell/noncooperative multi-cell TDD system, it was also revealed that increasing the number of BS antennas is always beneficial, even when the SNR is low and the channel estimate is poor. Furthermore, when the number of BS antennas tends to infinity, the effects of both the small-scale fast fading and uncorrelated noise are mitigated. In other words, a large number of BS antennas, regardless of whether the uplink or the downlink is considered, may be exploited to *trade for* relevant performance improvements, such as compensating for the low SNR and/or poor channel estimates [25], [354], [563], [574].

However, in the noncooperative multi-cell scenario, due to the so-called “pilot contamination” problem¹⁹ [25], [563], the interference emanating from other cells does exist and becomes the major limiting factor of the achievable performance [25], [563]. Therefore, in order to further enhance the achievable performance, the BS cooperation based multi-cell joint processing philosophy has to be adopted [131], as detailed below.

B. Detection in Cooperative Multi-cell Multiuser LS-MIMO Systems

As pointed out in Section III, the multi-cell transmission scenario is characterized by the so-called “MIMO interference channels” of Fig. 11. Fundamentally, in order to cope with the interference, it may be desirable to *transform* the distributed model (such as the BSs of multiple cells) to a centralized model. This may be achieved by centralized/distributed BS cooperation [24], [131], where multiple BSs of adjacent cells may be connected via high-capacity optic fiber or microwave links, as shown in Fig. 29. As a result, effectively a physical/virtual super-BS is constructed to serve the cluster of collaborative cells, and this physical/virtual centralized model provides the performance *upper bound* of the original distributed system model. As far as detection is concerned, in principle most of the detection algorithms developed for the single-cell/noncooperative multi-cell scenarios may be adapted to the uplink of the cooperative multi-cell LS-MIMO system. The BS cooperation aided network MIMO detectors may be designed based on two distinct philosophies, namely using either interference cancellation [202] or data fusion [131]. However, the employment of BS cooperation might result in substantially increased backhaul traffic, which represents

¹⁹This is essentially the interference caused by reusing pilot sequences in adjacent cells.

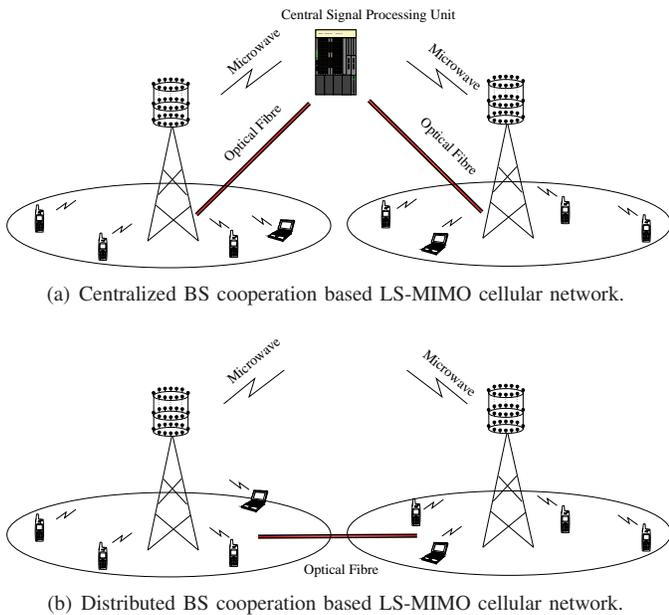


Fig. 29. Centralized and distributed BS cooperation based multi-cell multiuser based LS-MIMO systems, which is also known as network-MIMO.

one of the major challenges facing the BS cooperation aided network MIMO.

C. Applicability of Existing MIMO Detection Algorithms to LS-MIMO

An inherent characteristic of LS-MIMO systems is their large dimension. Before investigating the applicability of existing MIMO detection algorithms in the LS-MIMO context, we have to identify which specific type of LS-MIMO systems is considered. On the one hand, in general most of the existing MIMO detectors would be applicable to a Type-II LS-MIMO system, where it is possible that low-complexity linear MIMO detectors might be capable of achieving near-optimum performance. Hence, the employment of more sophisticated MIMO detectors, such as the SD detector, may become unnecessary. On the other hand, some existing MIMO detection algorithms that have been specifically tailored for conventional small-/medium-scale MIMO systems might not be applicable to the Type-I LS-MIMO systems. To elaborate a little further, the family of tree-search based MIMO detectors, such as the popular SD detector that has a worst-case computational complexity increasing exponentially with the number of transmit antennas (see Section VIII-D for more details), will become less feasible in the Type-I LS-MIMO systems. Nonetheless, it might still be invoked in the Type-II LS-MIMO systems. By contrast, the PDA algorithm [130]–[133], which invokes the central limit theorem to perform stochastic interference modelling and imposes a polynomial-time worst-case computational complexity, will achieve an attractive performance versus complexity tradeoff in the Type-I LS-MIMO systems. Similarly, the convex optimization²⁰ based SDPR detectors, which also exhibit a polynomial-time

²⁰Note that it is quite common to solve hundreds of unknown variables in a convex optimization problem.

worst-case complexity as a function of the number of transmit antennas, might potentially be applicable to the Type-I LS-MIMO systems [147].

D. Recent Advances in LS-MIMO Detection

The LS-MIMO systems have become a hot research topic following Marzetta's seminal work [563]. However, in terms of detection, several earlier works had touched upon this topic from either a large system analysis or an asymptotic performance analysis perspective. To elaborate a little further, in 2006 Tan and Rasmussen [118] derived a class of asymptotically optimal nonlinear MMSE MUDs based on a multivariate Gaussian approximation of the MUI for large-scale CDMA systems. This approach provided an alternative analytical justification for the structure of the PDA based detectors. The associated performance analysis showed that the BER performance of the PDA detectors can be accurately predicted and is close to the optimal detector's performance for large CDMA systems. Also in 2006, Liang *et al.* [311] proposed a block-iterative generalized decision feedback equalizer (BI-GDFE) for LS-MIMO systems using PSK constellations. Their asymptotic performance analysis demonstrated that the BI-GDFE closely approaches the single-user matched-filter bound (MFB) for large random MIMO channels, provided that the received SNR is sufficiently high [312]. Furthermore, in 2007 Liang *et al.* derived both the limit and the asymptotic distribution of the signal-to-interference-plus-noise ratio (SINR) for a class of MMSE receivers invoked in large-scale CDMA systems supporting unequal-power users. Their solution relied on the random matrix theory. They also proved that the limiting SINR converges to a deterministic value when $\lim_{K,N \rightarrow \infty} \frac{K}{N} = c$, where K is the number of users, N is the number of degrees of freedom and c is a positive constant. Recall that this insight is the same as that discussed in the context of (26). Additionally, they proved that the SINR of each particular user is asymptotically Gaussian for large N and derived the closed-form expressions of the variance for the SINR variable under both real-valued spreading and complex-valued spreading. As a further advance, in 2008 Liang *et al.* [313] investigated the relationship between the MMSE-SIC receiver and the BI-GDFE receiver. The asymptotic performance of the two receivers was compared for large random MIMO channel matrices, and it was shown that the two receivers have a similar convergence behavior, and that both of them are capable of achieving a BER performance approaching the single-user MFB for sufficiently high SNRs.

Chockalingam *et al.* also made significant contributions to the LS-MIMO detection problem, mainly using a variety of metaheuristics based local search algorithms invoked from machine learning/artificial intelligence [317]. More specifically, in 2008 they extended the low-complexity likelihood ascent search (LAS) based MUD [575]–[577] to the Type-I LS-MIMO system having up to 600 transmit and receive antennas [314]. This detector relies on the local neighborhood search and has its roots in the family of Hopfield neural network

(HNN)²¹ based MUD algorithms [580]–[585]. It was shown that the LAS detector²² is capable of achieving near single-input single-output AWGN performance in a fading LS-MIMO environment at an average per-bit complexity of $O(N_t N_r)$ [314]. Subsequently, they applied another local neighborhood search based algorithm, namely the reactive tabu search (RTS) algorithm, to the detection of LS-MIMO systems. The RTS detector was shown to perform better than the LAS detector, because it relied on an efficient local minima exit strategy [128]. Additionally, a class of belief propagation (BP) LS-MIMO detectors relying on graphical models were proposed in [318], [319], [324]²³. A range of other detectors were studied by Chockalingam and his team in the context of LS-MIMO systems, including the randomized Markov chain Monte Carlo (R-MCMC) detector [320], the randomized search (RS) detector [320], the Monte-Carlo-Sampling based detector which jointly relies on a mixed Gibbs sampling (MGS) strategy combined with a multiple restart (MR) strategy [321], and the LR based²⁴ detector [322]. Additionally, they applied various detectors, including the MMSE detector, the PDA detector, the LAS detector and the RTS detector, in high-rate non-orthogonal STBC aided LS-MIMO systems [128], [315], [316]. Furthermore, it was shown that non-binary LDPC coded LS-MIMO systems are capable of achieving a near-capacity performance with MMSE detection [323]. It should be noted that in principle a variety of other metaheuristics based MUDs, such as the genetic algorithm (GA) based MUD [503]–[509], the ant colony optimization (ACO) based MUD [511]–[515], the particle swarm optimization (PSO) aided MUD [519]–[521], and the simulated annealing (SA) assisted MUD [522], [523], may also be extended to the LS-MIMO context.

Finally, some soft-input soft-output LS-MIMO detectors having a relatively low complexity were proposed in [325], [326], which rely on the subspace marginalization aided interference suppression (SUMIS) technique and an approximate message passing algorithm, respectively. The first ASIC design of an LS-MIMO detector invoking the truncated Neumann series expansion technique was reported in [327], [328], which achieves a data rate of 3.8 Gb/s for a 3GPP Long Term Evolution-Advanced (LTE-A) based LS-MIMO system having 128 BS antennas and supporting 8 users.

E. Applications of MIMO Techniques in Other Areas

Apart from its dominant applications in wireless communications, a range of other research areas also significantly benefit from MIMO detection techniques. For example, the idea of MIMO signal processing was extended to radar design, and the so-called “MIMO radar”, as illustrated in Fig. 30, has been a hot research topic since the 2000s [587]–[593].

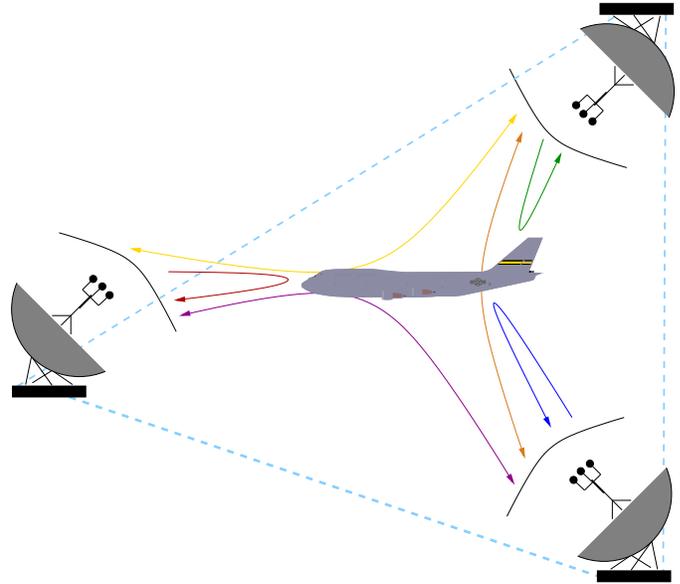


Fig. 30. Conceptual illustration of MIMO radar systems.

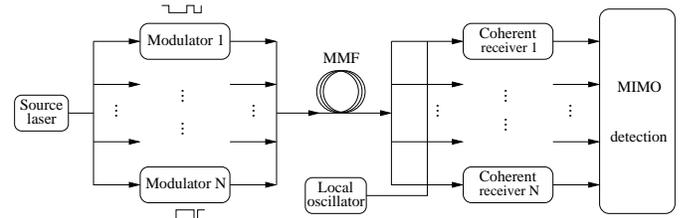


Fig. 31. An example of MIMO optical fiber system.

Additionally, MIMO signal processing techniques are also instrumental in mode-division multiplexing (MDM) based multimode fiber (MMF) optical communication systems, as shown in Fig. 31. For more details on MIMO aided high-speed optical communications, please refer to [594]–[600].

X. SUMMARY AND CONCLUSIONS

The concept of LS-MIMO systems may be regarded as a paradigm shift in the wireless communication and signal processing community. In this large dimensional context, the MIMO detection problem becomes even more challenging and important. To facilitate a better understanding of MIMO detection techniques, in this survey, we provided a detailed clarification of the MIMO detection fundamentals, and recited the half-a-century history of MIMO detection. We also provided concise discussions on the distinct detection strategies for different types of LS-MIMO systems and concluded with the recent advances in LS-MIMO detection. Relevant insights and lessons were extracted from the rich heritage of small-/medium-scale MIMO detection. We note that when considering the design of LS-MIMO detectors, it is necessary to first identify which type of LS-MIMO system is considered. Specifically, the employment of several popular MIMO detectors, such as the SD based MIMO detectors, may become infeasible in Type-I LS-MIMO systems, while some low-complexity linear MIMO detectors may achieve near-optimum performance

²¹The HNN algorithms were also proposed for the restoration of large image [578], [579].

²²A multiple-output selection based LAS detector, namely the list LAS detector, was also proposed in [586] for LS-MIMO systems.

²³Very recently, Wu *et al.* also proposed an approximate message passing algorithm based iterative detector for FEC-coded large-scale MIMO-OFDM systems [326].

²⁴The application of LR detectors in LS-MIMO systems was also investigated by Zhou *et al.* in [103].

in Type-II LS-MIMO systems. Additionally, it was reported that in the LS-MIMO context, local neighborhood search based metaheuristics, Bayesian based message passing methods as well as convex optimization based methods may strike a promising performance versus complexity tradeoff.

ACKNOWLEDGMENT

The authors would like to thank Prof. Hamid Jafarkhani (University of California, Irvine), Prof. Arogyaswami Paulraj (Stanford University) and anonymous reviewers for their insightful comments and suggestions.

REFERENCES

- [1] D. McQueen, "The momentum behind LTE adoption," *IEEE Communications Magazine*, vol. 47, no. 2, pp. 44–45, Feb. 2009.
- [2] K. Lee, J. Lee, Y. Yi, I. Rhee, and S. Chong, "Mobile data offloading: how much can WiFi deliver?" in *Proc. ACM 6th International Conference on emerging Networking Experiments and Technologies (CoNEXT'10)*, Philadelphia, Pennsylvania, USA, Dec. 2010, pp. 26:1–26:12. [Online]. Available: <http://doi.acm.org/10.1145/1921168.1921203>
- [3] M. El-Sayed, A. Mukhopadhyay, C. Urrutia-Valdés, and Z. J. Zhao, "Mobile data explosion: monetizing the opportunity through dynamic policies and QoS pipes," *Bell Labs Technical Journal*, vol. 16, no. 2, pp. 79–99, Sep. 2011. [Online]. Available: <http://dx.doi.org/10.1002/bltj.20504>
- [4] P. Ranganathan, "From microprocessors to nanostores: rethinking data-centric systems," *IEEE Computer Magazine*, vol. 44, no. 1, pp. 39–48, Jan. 2011.
- [5] B. Han, P. Hui, V. S. A. Kumar, M. V. Marathe, J. Shao, and A. Srinivasan, "Mobile data offloading through opportunistic communications and social participation," *IEEE Transactions on Mobile Computing*, vol. 11, no. 5, pp. 821–834, May 2012.
- [6] "Cisco Visual Networking Index: Global Mobile Data Traffic Forecast Update, 2013–2018," White Paper, Cisco, Feb. 2014. [Online]. Available: http://www.cisco.com/c/en/us/solutions/collateral/service-provider/visual-networking-index-vni/white_paper_c11-520862.pdf
- [7] Cisco Visual Networking Index (VNI). Cisco. [Online]. Available: <http://www.cisco.com/c/en/us/solutions/service-provider/visual-networking-index-vni/index.html>
- [8] G. Lawton, "Machine-to-machine technology gears up for growth," *IEEE Computer Magazine*, vol. 37, no. 9, pp. 12–15, Sep. 2004.
- [9] I. Cha, Y. Shah, A. U. Schmidt, A. Leicher, and M. V. Meyerstein, "Trust in M2M communication," *IEEE Vehicular Technology Magazine*, vol. 4, no. 3, pp. 69–75, Sep. 2009.
- [10] B. Emmerson, "M2M: the internet of 50 billion devices," *Huawei WinWin Magazine*, no. 4, pp. 19–22, Jan. 2010. [Online]. Available: <http://www-cnc.huawei.com/de/static/HW-072296.pdf>
- [11] M. Starsinic, "System architecture challenges in the home M2M network," in *Proc. IEEE 6th Annual Conference on Long Island Systems Applications and Technology (LISAT'10)*, Farmingdale, NY, USA, May 2010, pp. 1–7.
- [12] Y. Chen and W. Wang, "Machine-to-machine communication in LTE-A," in *Proc. IEEE 72nd Vehicular Technology Conference (VTC'10-Fall)*, Ottawa, ON, Canada, Sep. 2010, pp. 1–4.
- [13] Z. M. Fadlullah, M. M. Fouda, N. Kato, A. Takeuchi, N. Iwasaki, and Y. Nozaki, "Toward intelligent machine-to-machine communications in smart grid," *IEEE Communications Magazine*, vol. 49, no. 4, pp. 60–65, Apr. 2011.
- [14] D. Niyato, L. Xiao, and P. Wang, "Machine-to-machine communications for home energy management system in smart grid," *IEEE Communications Magazine*, vol. 49, no. 4, pp. 53–59, Apr. 2011.
- [15] S.-Y. Lien, K.-C. Chen, and Y. Lin, "Toward ubiquitous massive accesses in 3GPP machine-to-machine communications," *IEEE Communications Magazine*, vol. 49, no. 4, pp. 66–74, Apr. 2011.
- [16] R. Lu, X. Li, X. Liang, X. Shen, and X. Lin, "GRS: the green, reliability, and security of emerging machine to machine communications," *IEEE Communications Magazine*, vol. 49, no. 4, pp. 28–35, Apr. 2011.
- [17] G. Wu, S. Talwar, K. Johnson, N. Himayat, and K. D. Johnson, "M2M: from mobile to embedded internet," *IEEE Communications Magazine*, vol. 49, no. 4, pp. 36–43, Apr. 2011.
- [18] Y. Zhang, R. Yu, S. Xie, W. Yao, Y. Xiao, and M. Guizani, "Home M2M networks: architectures, standards, and QoS improvement," *IEEE Communications Magazine*, vol. 49, no. 4, pp. 44–52, Apr. 2011.
- [19] S.-Y. Lien and K.-C. Chen, "Massive access management for QoS guarantees in 3GPP machine-to-machine communications," *IEEE Communications Letters*, vol. 15, no. 3, pp. 311–313, Mar. 2011.
- [20] United States Frequency Allocation Chart: August 2011 Edition. National Telecommunications and Information Administration, United States Department of Commerce. [Online]. Available: http://www.ntia.doc.gov/files/ntia/publications/spectrum_wall_chart_aug2011.pdf
- [21] A. Paulraj, R. Nabar, and D. Gore, *Introduction to Space-Time Wireless Communications*. Cambridge University Press, 2003.
- [22] D. Gesbert, M. Kountouris, R. W. Heath, C.-B. Chae, and T. Salzer, "Shifting the MIMO paradigm: from single-user to multiuser communications," *IEEE Signal Processing Magazine*, vol. 24, no. 5, pp. 36–46, Oct. 2007.
- [23] J. Mietzner, R. Schober, L. Lampe, W. H. Gerstacker, and P. A. Hoeher, "Multiple-antenna techniques for wireless communications – a comprehensive literature survey," *IEEE Communications Surveys & Tutorials*, vol. 11, no. 2, pp. 87–105, Second Quarter 2009.
- [24] D. Gesbert, S. V. Hanly, H. Huang, S. Shamai (Shitz), O. Simeone, and W. Yu, "Multi-cell MIMO cooperative networks: a new look at interference," *IEEE Journal on Selected Areas in Communications*, vol. 28, no. 9, pp. 1380–1408, Dec. 2010.
- [25] F. Rusek, D. Persson, B. K. Lau, E. G. Larsson, T. L. Marzetta, O. Edfors, and F. Tufvesson, "Scaling up MIMO: opportunities and challenges with very large arrays," *IEEE Signal Processing Magazine*, vol. 30, no. 1, pp. 40–60, Jan. 2013.
- [26] E. Larsson, O. Edfors, F. Tufvesson, and T. Marzetta, "Massive MIMO for next generation wireless systems," *IEEE Communications Magazine*, vol. 52, no. 2, pp. 186–195, Feb. 2014.
- [27] F. Boccardi, R. W. Heath, A. Lozano, T. L. Marzetta, and P. Popovski, "Five disruptive technology directions for 5G," *IEEE Communications Magazine*, vol. 52, no. 2, pp. 74–80, Feb. 2014.
- [28] J. G. Andrews, S. Buzzi, W. Choi, S. V. Hanly, A. Lozano, A. C. K. Soong, and J. C. Zhang, "What will 5G be?" *IEEE Journal on Selected Areas in Communications*, vol. 32, no. 6, pp. 1065–1082, Jun. 2014.
- [29] L. Lu, G. Li, A. Swindlehurst, A. Ashikhmin, and R. Zhang, "An overview of massive MIMO: Benefits and challenges," *IEEE Journal of Selected Topics in Signal Processing*, vol. 8, no. 5, Oct. 2014.
- [30] C. Han, T. Harrold, S. Armour, I. Krikidis, S. Videv, P. M. Grant, H. Haas, J. S. Thompson, I. Ku, C.-X. Wang, T. A. Le, M. R. Nakhai, J. Zhang, and L. Hanzo, "Green radio: radio techniques to enable energy-efficient wireless networks," *IEEE Communications Magazine*, vol. 49, no. 6, pp. 46–54, Jun. 2011.
- [31] H. Q. Ngo, E. G. Larsson, and T. L. Marzetta, "Energy and spectral efficiency of very large multiuser MIMO systems," *IEEE Transactions on Communications*, vol. 61, no. 4, pp. 1436–1449, Apr. 2013.
- [32] M. Di Renzo, H. Haas, A. Ghayeb, S. Sugiura, and L. Hanzo, "Spatial modulation for generalized MIMO: Challenges, opportunities, and implementation," *Proceedings of the IEEE*, vol. 102, no. 1, pp. 56–103, Jan. 2014.
- [33] T. S. Rappaport, S. Sun, R. Mayzus, H. Zhao, Y. Azar, K. Wang, G. N. Wong, J. K. Schulz, M. Samimi, and F. Gutierrez, "Millimeter wave mobile communications for 5G cellular: it will work!" *IEEE Access*, vol. 1, pp. 335–349, May 2013.
- [34] C. E. Shannon, "A mathematical theory of communication," *The Bell System Technical Journal*, vol. 27, no. 3, pp. 379–423, Jul. 1948.
- [35] S. V. Hanly and P. Whiting, "Information-theoretic capacity of multi-receiver networks," *Telecommunication Systems*, vol. 1, no. 1, pp. 1–42, 1993.
- [36] A. D. Wyner, "Shannon-theoretic approach to a Gaussian cellular multiple-access channel," *IEEE Transactions on Information Theory*, vol. 40, no. 6, pp. 1713–1727, Nov. 1994.
- [37] S. Shamai (Shitz) and A. D. Wyner, "Information-theoretic considerations for symmetric, cellular, multiple-access fading channels – Part I," *IEEE Transactions on Information Theory*, vol. 43, no. 6, pp. 1877–1894, Nov. 1997.
- [38] —, "Information-theoretic considerations for symmetric, cellular, multiple-access fading channels – Part II," *IEEE Transactions on Information Theory*, vol. 43, no. 6, pp. 1895–1911, Nov. 1997.
- [39] O. Somekh and S. Shamai (Shitz), "Shannon-theoretic approach to a Gaussian cellular multiple-access channel with fading," *IEEE Transactions on Information Theory*, vol. 46, no. 4, pp. 1401–1425, Jul. 2000.
- [40] S. Catreux, P. F. Driessen, and L. J. Greenstein, "Simulation results for an interference-limited multiple-input multiple-output cellular system," *IEEE Communications Letters*, vol. 4, no. 11, pp. 334–336, Nov. 2000.

- [41] —, “Attainable throughput of an interference-limited multiple-input multiple-output (MIMO) cellular system,” *IEEE Transactions on Communications*, vol. 49, no. 8, pp. 1307–1311, Aug. 2001.
- [42] R. S. Blum, J. H. Winters, and N. R. Sollenberger, “On the capacity of cellular systems with MIMO,” *IEEE Communications Letters*, vol. 6, no. 6, pp. 242–244, Jun. 2002.
- [43] H. Dai, A. F. Molisch, and H. V. Poor, “Downlink capacity of interference-limited MIMO system with joint detection,” *IEEE Transactions on Wireless Communications*, vol. 3, no. 2, pp. 442–453, Mar. 2004.
- [44] D. N. C. Tse and P. Viswanath, *Fundamentals of Wireless Communication*. Cambridge, UK: Cambridge University Press, 2005.
- [45] P. van Emde Boas, “Another NP-complete partition problem and the complexity of computing short vectors in a lattice,” Department of Mathematics, University of Amsterdam, The Netherlands, Tech. Rep. 81-04, Apr. 1981.
- [46] S. Verdú, “Computational complexity of optimum multiuser detection,” *Algorithmica*, vol. 4, no. 1-4, pp. 303–312, Jun. 1989. [Online]. Available: <http://dx.doi.org/10.1007/BF01553893>
- [47] D. Micciancio, “The hardness of the closest vector problem with preprocessing,” *IEEE Transactions on Information Theory*, vol. 47, no. 3, pp. 1212–1215, Mar. 2001.
- [48] A. Duel-Hallen, J. M. Holtzman, and Z. Zvonar, “Multiuser detection for CDMA systems,” *IEEE Personal Communications Magazine*, vol. 2, no. 2, pp. 46–58, Apr. 1995.
- [49] S. Moshavi, “Multi-user detection for DS-SS communications,” *IEEE Communications Magazine*, vol. 34, no. 10, pp. 124–136, Oct. 1996.
- [50] S. Verdú, *Multiuser Detection*. Cambridge, UK: Cambridge University Press, 1998.
- [51] M. L. Honig, Ed., *Advances in Multiuser Detection*. John Wiley & Sons, Inc., 2009.
- [52] L. Bai and J. Choi, *Low Complexity MIMO Detection*. Springer, 2012.
- [53] E. Viterbo and J. Boutros, “A universal lattice code decoder for fading channels,” *IEEE Transactions on Information Theory*, vol. 45, no. 7, pp. 1639–1642, Jul. 1999.
- [54] E. Agrell, T. Eriksson, A. Vardy, and K. Zeger, “Closest point search in lattices,” *IEEE Transactions on Information Theory*, vol. 48, no. 8, pp. 2201–2214, Aug. 2002.
- [55] M. O. Damen, A. Chkeif, and J.-C. Belfiore, “Lattice code decoder for space-time codes,” *IEEE Communications Letters*, vol. 4, no. 5, pp. 161–163, May 2000.
- [56] M. O. Damen, K. Abed-Meraim, and J.-C. Belfiore, “Generalised sphere decoder for asymmetrical space-time communication architecture,” *Electronics Letters*, vol. 36, no. 2, pp. 166–167, Jan. 2000.
- [57] M. O. Damen, H. El Gamal, and G. Caire, “On maximum-likelihood detection and the search for the closest lattice point,” *IEEE Transactions on Information Theory*, vol. 49, no. 10, pp. 2389–2402, Oct. 2003.
- [58] B. Hassibi and H. Vikalo, “On the sphere-decoding algorithm I. expected complexity,” *IEEE Transactions on Signal Processing*, vol. 53, no. 8, pp. 2806–2818, Aug. 2005.
- [59] H. Vikalo and B. Hassibi, “On the sphere-decoding algorithm II. generalizations, second-order statistics, and applications to communications,” *IEEE Transactions on Signal Processing*, vol. 53, no. 8, pp. 2819–2834, Aug. 2005.
- [60] J. Jaldén and B. Ottersten, “On the complexity of sphere decoding in digital communications,” *IEEE Transactions on Signal Processing*, vol. 53, no. 4, pp. 1474–1484, Apr. 2005.
- [61] A. Burg, M. Borgmann, M. Wenk, M. Zellweger, W. Fichtner, and H. Bolcskei, “VLSI implementation of MIMO detection using the sphere decoding algorithm,” *IEEE Journal of Solid-State Circuits*, vol. 40, no. 7, pp. 1566–1577, Jul. 2005.
- [62] K.-W. Wong, C.-Y. Tsui, R. S. Cheng, and W.-H. Mow, “A VLSI architecture of a K-best lattice decoding algorithm for MIMO channels,” in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS’02)*, Scottsdale, AZ, USA, May 2002, pp. III–273–III–276.
- [63] Z. Guo and P. Nilsson, “Algorithm and implementation of the K-best sphere decoding for MIMO detection,” *IEEE Journal on Selected Areas in Communications*, vol. 24, no. 3, pp. 491–503, Mar. 2006.
- [64] S. Chen, T. Zhang, and Y. Xin, “Relaxed K-best MIMO signal detector design and VLSI implementation,” *IEEE Transactions on Very Large Scale Integration (VLSI) Systems*, vol. 15, no. 3, pp. 328–337, 2007.
- [65] C. Studer, A. Burg, and H. Bolcskei, “Soft-output sphere decoding: algorithms and VLSI implementation,” *IEEE Journal on Selected Areas in Communications*, vol. 26, no. 2, pp. 290–300, Feb. 2008.
- [66] A. R. Murugan, H. El Gamal, M. O. Damen, and G. Caire, “A unified framework for tree search decoding: rediscovering the sequential decoder,” *IEEE Transactions on Information Theory*, vol. 52, no. 3, pp. 933–953, Mar. 2006.
- [67] R. Gowaikar and B. Hassibi, “Statistical pruning for near-maximum likelihood decoding,” *IEEE Transactions on Signal Processing*, vol. 55, no. 6, pp. 2661–2675, Jun. 2007.
- [68] K. Lee and J. Chun, “ML symbol detection based on the shortest path algorithm for MIMO systems,” *IEEE Transactions on Signal Processing*, vol. 55, no. 11, pp. 5477–5484, Nov. 2007.
- [69] M. Stojnic, H. Vikalo, and B. Hassibi, “Speeding up the sphere decoder with H^∞ and SDP inspired lower bounds,” *IEEE Transactions on Signal Processing*, vol. 56, no. 2, pp. 712–726, Feb. 2008.
- [70] T.-H. Kim and I.-C. Park, “High-throughput and area-efficient MIMO symbol detection based on modified Dijkstra’s search,” *IEEE Transactions on Circuits and Systems I: Regular Papers*, vol. 57, no. 7, pp. 1756–1766, Jul. 2010.
- [71] R. Y. Chang, W.-H. Chung, and S.-J. Lin, “A* algorithm inspired memory-efficient detection for MIMO systems,” *IEEE Wireless Communications Letters*, vol. 1, no. 5, pp. 508–511, Oct. 2012.
- [72] R. Y. Chang and W.-H. Chung, “Best-first tree search with probabilistic node ordering for MIMO detection: generalization and performance-complexity tradeoff,” *IEEE Transactions on Wireless Communications*, vol. 11, no. 2, pp. 780–789, Feb. 2012.
- [73] J. W. Choi, B. Shim, and A. C. Singer, “Efficient soft-input soft-output tree detection via an improved path metric,” *IEEE Transactions on Information Theory*, vol. 58, no. 3, pp. 1518–1533, Mar. 2012.
- [74] B. M. Hochwald and S. ten Brink, “Achieving near-capacity on a multiple-antenna channel,” *IEEE Transactions on Communications*, vol. 51, no. 3, pp. 389–399, Mar. 2003.
- [75] J. Boutros, N. Gresset, L. Brunel, and M. Fossorier, “Soft-input soft-output lattice sphere decoder for linear channels,” in *Proc. IEEE Global Telecommunications Conference (GLOBECOM’03)*, San Francisco, USA, Dec. 2003, pp. 1583–1587.
- [76] H. Vikalo, B. Hassibi, and T. Kailath, “Iterative decoding for MIMO channels via modified sphere decoding,” *IEEE Transactions on Wireless Communications*, vol. 3, no. 6, pp. 2299–2311, Nov. 2004.
- [77] R. Wang and G. B. Giannakis, “Approaching MIMO channel capacity with soft detection based on hard sphere decoding,” *IEEE Transactions on Communications*, vol. 54, no. 4, pp. 587–590, Apr. 2006.
- [78] C. Studer and H. Bolcskei, “Soft-input soft-output single tree-search sphere decoding,” *IEEE Transactions on Information Theory*, vol. 56, no. 10, pp. 4827–4842, Oct. 2010.
- [79] M. Rachid and B. Daneshrad, “Iterative MIMO sphere decoding throughput guarantees under realistic channel conditions,” *IEEE Communications Letters*, vol. 14, no. 4, pp. 342–344, Apr. 2010.
- [80] L. G. Barbero and J. S. Thompson, “Fixing the complexity of the sphere decoder for MIMO detection,” *IEEE Transactions on Wireless Communications*, vol. 7, no. 6, pp. 2131–2142, Jun. 2008.
- [81] —, “Extending a fixed-complexity sphere decoder to obtain likelihood information for Turbo-MIMO systems,” *IEEE Transactions on Vehicular Technology*, vol. 57, no. 5, pp. 2804–2814, Sep. 2008.
- [82] J. Jaldén, L. G. Barbero, B. Ottersten, and J. S. Thompson, “The error probability of the fixed-complexity sphere decoder,” *IEEE Transactions on Signal Processing*, vol. 57, no. 7, pp. 2711–2720, Jul. 2009.
- [83] H. Yao and G. W. Wornell, “Lattice-reduction-aided detectors for MIMO communication systems,” in *Proc. IEEE Global Telecommunications Conference (GLOBECOM’02)*, Nov. 2002, pp. 424–428.
- [84] C. Windpassinger and R. F. H. Fischer, “Low-complexity near-maximum-likelihood detection and precoding for MIMO systems using lattice reduction,” in *Proc. IEEE Information Theory Workshop (ITW’03)*, Paris, France, Mar. 2003, pp. 345–348.
- [85] D. Wübben, R. Böhneke, V. Kühn, and K.-D. Kammeyer, “Near-maximum-likelihood detection of MIMO systems using MMSE-based lattice reduction,” in *Proc. IEEE International Conference on Communications (ICC’04)*, Paris, France, Jun. 2004, pp. 798–802.
- [86] C. Windpassinger, R. F. H. Fischer, and J. B. Huber, “Lattice-reduction-aided broadcast precoding,” *IEEE Transactions on Communications*, vol. 52, no. 12, pp. 2057–2060, Dec. 2004.
- [87] M. Taherzadeh, A. Mobasher, and A. K. Khandani, “LLL reduction achieves the receive diversity in MIMO decoding,” *IEEE Transactions on Information Theory*, vol. 53, no. 12, pp. 4801–4805, Dec. 2007.
- [88] C. Ling and N. Howgrave-Graham, “Effective LLL reduction for lattice decoding,” in *Proc. IEEE International Symposium on Information Theory (ISIT’07)*, Nice, France, Jun. 2007, pp. 196–200.

- [89] J. Jaldén, D. Seethaler, and G. Matz, "Worst- and average-case complexity of LLL lattice reduction in MIMO wireless systems," in *Proc. IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP'08)*, Las Vegas, NV, Mar. 2008, pp. 2685–2688.
- [90] D. Seethaler, G. Matz, and F. Hlawatsch, "Low-complexity MIMO data detection using Seysen's lattice reduction algorithm," in *Proc. IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP'07)*, vol. 3, Apr. 2007, pp. III–53–III–56.
- [91] W. Zhang, F. Arnold, and X. Ma, "An analysis of Seysen's lattice reduction algorithm," *Signal Processing*, vol. 88, no. 10, pp. 2573–2577, Oct. 2008.
- [92] A. Burg, D. Seethaler, and G. Matz, "VLSI implementation of a lattice-reduction algorithm for multi-antenna broadcast precoding," in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS'07)*, New Orleans, LA, May 2007, pp. 673–676.
- [93] M. Shabany and P. G. Gulak, "The application of lattice-reduction to the K-best algorithm for near-optimal MIMO detection," in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS'08)*, Seattle, WA, May 2008, pp. 316–319.
- [94] B. Gestner, W. Zhang, X. Ma, and D. V. Anderson, "VLSI implementation of a lattice reduction algorithm for low-complexity equalization," in *Proc. IEEE International Conference on Circuits and Systems for Communications (ICCSC'08)*, Shanghai, China, May 2008, pp. 643–647.
- [95] Y. H. Gan and W. H. Mow, "Complex lattice reduction algorithms for low-complexity MIMO detection," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'05)*, St. Louis, MO, Dec. 2005, pp. 2953–2957.
- [96] Y. H. Gan, C. Ling, and W. H. Mow, "Complex lattice reduction algorithm for low-complexity full-diversity MIMO detection," *IEEE Transactions on Signal Processing*, vol. 57, no. 7, pp. 2701–2710, Jul. 2009.
- [97] X. Ma and W. Zhang, "Performance analysis for MIMO systems with lattice-reduction aided linear equalization," *IEEE Transactions on Communications*, vol. 56, no. 2, pp. 309–318, Feb. 2008.
- [98] —, "Fundamental limits of linear equalizers: Diversity, capacity, and complexity," *IEEE Transactions on Information Theory*, vol. 54, no. 8, pp. 3442–3456, Aug. 2008.
- [99] P. Silvola, K. Hooli, and M. Juntti, "Suboptimal soft-output MAP detector with lattice reduction," *IEEE Signal Processing Letters*, vol. 13, no. 6, pp. 321–324, Jun. 2006.
- [100] X.-F. Qi and K. Holt, "A lattice-reduction-aided soft demapper for high-rate coded MIMO-OFDM systems," *IEEE Signal Processing Letters*, vol. 14, no. 5, pp. 305–308, May 2007.
- [101] V. Ponnampalam, D. McNamara, A. Lillie, and M. Sandell, "On generating soft outputs for lattice-reduction-aided MIMO detection," in *Proc. IEEE International Conference on Communications (ICC'07)*, Glasgow, UK, Jun. 2007, pp. 4144–4149.
- [102] W. Zhang and X. Ma, "Low-complexity soft-output decoding with lattice-reduction-aided detectors," *IEEE Transactions on Communications*, vol. 58, no. 9, pp. 2621–2629, Sep. 2010.
- [103] Q. Zhou and X. Ma, "Element-based lattice reduction algorithms for large MIMO detection," *IEEE Journal on Selected Areas in Communications*, vol. 31, no. 2, pp. 274–286, Feb. 2013.
- [104] J. Luo, K. R. Pattipati, P. K. Willett, and F. Hasegawa, "Near optimal multiuser detection in synchronous CDMA using probabilistic data association," *IEEE Communications Letters*, vol. 5, no. 9, pp. 361–363, Sep. 2001.
- [105] J. Luo, "Improved multiuser detection in code-division multiple access systems," Ph.D. dissertation, Univ. of Connecticut, Storrs, May 2002. [Online]. Available: <http://istec.colostate.edu/~rockey/Papers/PhDThesis.pdf>
- [106] D. Pham, J. Luo, K. R. Pattipati, and P. K. Willett, "A PDA-Kalman approach to multiuser detection in asynchronous CDMA," *IEEE Communications Letters*, vol. 6, no. 11, pp. 475–477, Nov. 2002.
- [107] J. Luo, K. R. Pattipati, and P. K. Willett, "A sliding window PDA for asynchronous CDMA, and a proposal for deliberate asynchronicity," *IEEE Transactions on Communications*, vol. 51, no. 12, pp. 1970–1974, 2003.
- [108] P. H. Tan, L. K. Rasmussen, and J. Luo, "Iterative multiuser decoding based on probabilistic data association," in *Proc. IEEE International Symposium on Information Theory (ISIT'03)*, Yokohama, Japan, Jun. 2003, pp. 301–301.
- [109] Y. Yin, Y. Huang, and J. Zhang, "Turbo equalization using probabilistic data association," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'04)*, Dallas, TX, USA, Dec. 2004, pp. 2535–2539.
- [110] Y. Huang and J. Zhang, "A generalized probabilistic data association multiuser detector," in *Proc. IEEE International Symposium on Information Theory (ISIT'04)*, Chicago, IL, USA, Jun. 2004, p. 529.
- [111] D. Pham, K. R. Pattipati, P. K. Willett, and J. Luo, "A generalized probabilistic data association detector for multiple antenna systems," *IEEE Communications Letters*, vol. 8, no. 4, pp. 205–207, Apr. 2004.
- [112] S. Liu and Z. Tian, "Near-optimum soft decision equalization for frequency selective MIMO channels," *IEEE Transactions on Signal Processing*, vol. 52, no. 3, pp. 721–733, Mar. 2004.
- [113] —, "A Kalman-PDA approach to soft-decision equalization for frequency-selective MIMO channels," *IEEE Transactions on Signal Processing*, vol. 53, no. 10, pp. 3819–3830, Oct. 2005.
- [114] G. Latsoudas and N. D. Sidiropoulos, "A hybrid probabilistic data association-sphere decoding detector for multiple-input-multiple-output systems," *IEEE Signal Processing Letters*, vol. 12, no. 4, pp. 309–312, Apr. 2005.
- [115] Y. Jia, C. Andrieu, R. J. Piechocki, and M. Sandell, "Gaussian approximation based mixture reduction for near optimum detection in MIMO systems," *IEEE Communications Letters*, vol. 9, no. 11, pp. 997–999, Nov. 2005.
- [116] J. Fricke, M. Sandell, J. Mietzner, and P. A. Hoehner, "Impact of the Gaussian approximation on the performance of the probabilistic data association MIMO decoder," *EURASIP Journal on Wireless Communications and Networking*, vol. 2005, no. 5, pp. 796–800, 2005.
- [117] J. Wang and S. Li, "MIMO turbo receiver with new probability data association soft interference cancellation," in *Proc. International Conference on Communications, Circuits and Systems (ICCCAS'05)*, Hong Kong, China, May 2005, pp. 232–236.
- [118] P. H. Tan and L. K. Rasmussen, "Asymptotically optimal nonlinear MMSE multiuser detection based on multivariate gaussian approximation," *IEEE Transactions on Communications*, vol. 54, no. 8, pp. 1427–1428, Aug. 2006.
- [119] Y. Cai, X. Xu, Y. Cheng, Y. Xu, and Z. Li, "A SISO iterative probabilistic data association detector for MIMO systems," in *Proc. 10th International Conference on Communication Technology (ICCT'06)*, Guilin, China, Nov. 2006, pp. 1–4.
- [120] Y. Jia, C. M. Vithanage, C. Andrieu, and R. J. Piechocki, "Probabilistic data association for symbol detection in MIMO systems," *Electronics Letters*, vol. 42, no. 1, pp. 38–40, Jan. 2006.
- [121] F. Cao, J. Li, and J. Yang, "On the relation between PDA and MMSE-ISDIC," *IEEE Signal Processing Letters*, vol. 14, no. 9, pp. 597–600, Sep. 2007.
- [122] S. Bavarian and J. K. Cavers, "Reduced complexity distributed base station processing in the uplink of cellular networks," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'07)*, Washington, DC, USA, Nov. 2007, pp. 4500–4504.
- [123] —, "Reduced-complexity belief propagation for system-wide MUD in the uplink of cellular networks," *IEEE Journal on Selected Areas in Communications*, vol. 26, no. 3, pp. 541–549, Apr. 2008.
- [124] Y. Jia, C. Andrieu, R. J. Piechocki, and M. Sandell, "Depth-first and breadth-first search based multilevel sga algorithms for near optimal symbol detection in mimo systems," *IEEE Transactions on Wireless Communications*, vol. 7, no. 3, pp. 1052–1061, Mar. 2008.
- [125] M. Grossmann and T. Matsumoto, "Nonlinear frequency domain MMSE turbo equalization using probabilistic data association," *IEEE Communications Letters*, vol. 12, no. 4, pp. 295–297, Apr. 2008.
- [126] Y. J. D. Kim and J. Bajcsy, "An iterative receiver for non-coherent MIMO systems with differential encoding," in *Proc. 5th IEEE Consumer Communications and Networking Conference (CCNC'08)*, Las Vegas, NV, Jan. 2008, pp. 46–47.
- [127] S. Yang, T. Lv, X. Yun, X. Su, and J. Xia, "A probabilistic data association based MIMO detector using joint detection of consecutive symbol vectors," in *Proc. 11th IEEE Singapore International Conference on Communication Systems (ICCS'08)*, Guangzhou, China, Nov. 2008, pp. 436–440.
- [128] S. K. Mohammed, A. Chockalingam, and B. S. Rajan, "Low-complexity near-MAP decoding of large non-orthogonal STBCs using PDA," in *IEEE International Symposium on Information Theory (ISIT'09)*, Seoul, Korea, Jul. 2009, pp. 1998–2002.
- [129] S. Bavarian and J. K. Cavers, "A new framework for soft decision equalization in frequency selective MIMO channels," *IEEE Transactions on Communications*, vol. 57, no. 2, pp. 415–422, Feb. 2009.
- [130] S. Yang, T. Lv, R. G. Maunder, and L. Hanzo, "Unified bit-based probabilistic data association aided MIMO detection for high-order QAM constellations," *IEEE Transactions on Vehicular Technology*, vol. 60, no. 3, pp. 981–991, Mar. 2011.

- [131] —, “Distributed probabilistic-data-association-based soft reception employing base station cooperation in MIMO-aided multiuser multicell systems,” *IEEE Transactions on Vehicular Technology*, vol. 60, no. 7, pp. 3532–3538, Sep. 2011.
- [132] S. Yang, L. Wang, T. Lv, and L. Hanzo, “Approximate Bayesian probabilistic-data-association-aided iterative detection for MIMO systems using arbitrary M -ary modulation,” *IEEE Transactions on Vehicular Technology*, vol. 62, no. 3, pp. 1228–1240, Mar. 2013.
- [133] S. Yang, T. Lv, R. G. Maunder, and L. Hanzo, “From nominal to true a posteriori probabilities: an exact Bayesian theorem based probabilistic data association approach for iterative MIMO detection and decoding,” *IEEE Transactions on Communications*, vol. 61, no. 7, pp. 2782–2793, Jul. 2013.
- [134] P. H. Tan and L. K. Rasmussen, “The application of semidefinite programming for detection in CDMA,” *IEEE Journal on Selected Areas in Communications*, vol. 19, no. 8, pp. 1442–1449, Aug. 2001.
- [135] W.-K. Ma, T. N. Davidson, K. M. Wong, Z.-Q. Luo, and P.-C. Ching, “Quasi-maximum-likelihood multiuser detection using semi-definite relaxation with application to synchronous CDMA,” *IEEE Transactions on Signal Processing*, vol. 50, no. 4, pp. 912–922, Apr. 2002.
- [136] W.-K. Ma, T. N. Davidson, K. M. Wong, and P.-C. Ching, “A block alternating likelihood maximization approach to multiuser detection,” *IEEE Transactions on Signal Processing*, vol. 52, no. 9, pp. 2600–2611, Sep. 2004.
- [137] M. Kisiailiou and Z.-Q. Luo, “Performance analysis of quasi-maximum-likelihood detector based on semi-definite programming,” in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP’05)*, vol. 3, Philadelphia, PA, Mar. 2005, pp. III/433–III/436.
- [138] J. Jaldén and B. Ottersten, “The diversity order of the semidefinite relaxation detector,” *IEEE Transactions on Information Theory*, vol. 54, no. 4, pp. 1406–1422, Apr. 2008.
- [139] Z.-Q. Luo, X. Luo, and M. Kisiailiou, “An efficient quasi-maximum likelihood decoder for PSK signals,” in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP’03)*, vol. 6, Hong Kong, China, Apr. 2003, pp. VI/561–VI/564.
- [140] W.-K. Ma, P.-C. Ching, and Z. Ding, “Semidefinite relaxation based multiuser detection for M -ary PSK multiuser systems,” *IEEE Transactions on Signal Processing*, vol. 52, no. 10, pp. 2862–2872, Oct. 2004.
- [141] A. Wiesel, Y. C. Eldar, and S. Shamai (Shitz), “Semidefinite relaxation for detection of 16-QAM signaling in MIMO channels,” *IEEE Signal Processing Letters*, vol. 12, no. 9, pp. 653–656, Sep. 2005.
- [142] Y. Yang, C. Zhao, P. Zhou, and W. Xu, “MIMO detection of 16-QAM signaling based on semidefinite relaxation,” *IEEE Signal Processing Letters*, vol. 14, no. 11, pp. 797–800, Nov. 2007.
- [143] N. D. Sidiropoulos and Z.-Q. Luo, “A semidefinite relaxation approach to MIMO detection for high-order QAM constellations,” *IEEE Signal Processing Letters*, vol. 13, no. 9, pp. 525–528, Sep. 2006.
- [144] A. Mobasher, M. Taherzadeh, R. Sotirov, and A. K. Khandani, “A near-maximum-likelihood decoding algorithm for MIMO systems based on semi-definite programming,” *IEEE Transactions on Information Theory*, vol. 53, no. 11, pp. 3869–3886, Nov. 2007.
- [145] Z. Mao, X. Wang, and X. Wang, “Semidefinite programming relaxation approach for multiuser detection of QAM signals,” *IEEE Transactions on Wireless Communications*, vol. 6, no. 12, pp. 4275–4279, Dec. 2007.
- [146] W.-K. Ma, C.-C. Su, J. Jaldén, T.-H. Chang, and C.-Y. Chi, “The equivalence of semidefinite relaxation MIMO detectors for higher-order QAM,” *IEEE Journal of Selected Topics in Signal Processing*, vol. 3, no. 6, pp. 1038–1052, Dec. 2009.
- [147] S. Yang, T. Lv, and L. Hanzo, “Semidefinite programming relaxation based virtually antipodal detection for MIMO systems using Gray-coded high-order QAM,” *IEEE Transactions on Vehicular Technology*, vol. 62, no. 4, pp. 1667–1677, 2013.
- [148] E. G. Larsson, “MIMO detection methods: how they work,” *IEEE Signal Processing Magazine*, vol. 26, no. 3, pp. 91–95, May 2009.
- [149] W. C. Y. Lee, “Overview of cellular CDMA,” *IEEE Transactions on Vehicular Technology*, vol. 40, no. 2, pp. 291–302, May 1991.
- [150] P. Jung, P. W. Baier, and A. Steil, “Advantages of CDMA and spread spectrum techniques over FDMA and TDMA in cellular mobile radio applications,” *IEEE Transactions on Vehicular Technology*, vol. 42, no. 3, pp. 357–364, Aug. 1993.
- [151] A. J. Viterbi, *CDMA: Principles of Spread Spectrum Communication*, 1st ed. Addison-Wesley, 1995.
- [152] R. H. Roy and B. Ottersten, “Spatial division multiple access wireless communication systems,” U.S. Patent 5 515 378, May 7, 1996.
- [153] D. Gerlach, “Adaptive transmitting antenna arrays at the base station in mobile radio networks,” Ph.D. dissertation, Department of Electrical Engineering, Stanford University, California, USA, 1995.
- [154] B. Ottersten, “Array processing for wireless communications,” in *Proc. 8th IEEE Signal Processing Workshop on Statistical Signal and Array Processing*, Corfu, Greece, Jun. 1996, pp. 466–473.
- [155] R. H. Roy, “Spatial division multiple access technology and its application to wireless communication systems,” in *Proc. IEEE 47th Vehicular Technology Conference (VTC’97)*, Phoenix, AZ, USA, May 1997, pp. 730–734.
- [156] M. P. Lotter and P. van Rooyen, “Space division multiple access for cellular CDMA,” in *Proc. IEEE 5th International Symposium on Spread Spectrum Techniques and Applications (ISSSTA’98)*, Sun City, South Africa, Sep. 1998, pp. 959–964.
- [157] P. Vandenameele, L. Van der Perre, and M. Engels, *Space Division Multiple Access for Wireless Local Area Networks*. Norwell, MA, USA: Kluwer, 2001.
- [158] A. Goldsmith, *Wireless Communications*, 1st ed. Cambridge University Press, 2005.
- [159] A. V. Oppenheim, A. S. Willsky, and S. H. Nawab, *Signals and Systems*, 2nd ed. Upper Saddle River, NJ, USA: Prentice-Hall, 1996.
- [160] B. Sklar, *Digital Communications: Fundamentals and Applications*, 2nd ed. Upper Saddle River, NJ, USA: Prentice-Hall, 2001.
- [161] T. S. Rappaport, *Wireless Communications: Principles and Practice*, 2nd ed. Upper Saddle River, NJ: Prentice Hall, 2002.
- [162] J. G. Proakis, *Digital Signal Processing: Principles, Algorithms and Applications*, 4th ed. Pearson Education, 2007.
- [163] S. Haykin, *Adaptive Filter Theory*, 4th ed. Upper Saddle River, NJ: Prentice Hall, 2002.
- [164] A. Jamalipour, T. Wada, and T. Yamazato, “A tutorial on multiple access technologies for beyond 3G mobile networks,” *IEEE Communications Magazine*, vol. 43, no. 2, pp. 110–117, Feb. 2005.
- [165] S. Kandukuri and S. Boyd, “Optimal power control in interference-limited fading wireless channels with outage-probability specifications,” *IEEE Transactions on Wireless Communications*, vol. 1, no. 1, pp. 46–55, Jan. 2002.
- [166] G. J. Foschini, “Layered space-time architecture for wireless communication in a fading environment when using multi-element antennas,” *Bell Labs Technical Journal*, vol. 1, no. 2, pp. 41–59, 1996.
- [167] P. W. Wolniansky, G. J. Foschini, G. D. Golden, and R. A. Valenzuela, “V-BLAST: an architecture for realizing very high data rates over the rich-scattering wireless channel,” in *Proc. URSI International Symposium on Signals, Systems, and Electronics (ISSSE’98)*, Pisa, Italy, Sep. 1998, pp. 295–300.
- [168] G. D. Golden, G. J. Foschini, R. A. Valenzuela, and P. W. Wolniansky, “Detection algorithm and initial laboratory results using V-BLAST space-time communication architecture,” *Electronics Letters*, vol. 35, no. 1, pp. 14–16, Jan. 1999.
- [169] S. Sfar, R. D. Murch, and K. B. Letaief, “Layered space-time multiuser detection over wireless uplink systems,” *IEEE Transactions on Wireless Communications*, vol. 2, no. 4, pp. 653–668, Jul. 2003.
- [170] S. Serbetli and A. Yener, “Transceiver optimization for multiuser MIMO systems,” *IEEE Transactions on Signal Processing*, vol. 52, no. 1, pp. 214–226, Jan. 2004.
- [171] F. Zhao, J. Liu, J. Liu, L. Guibas, and J. Reich, “Collaborative signal and information processing: an information-directed approach,” *Proceedings of the IEEE*, vol. 91, no. 8, pp. 1199–1209, Aug. 2003.
- [172] T. E. Hunter and A. Nosratinia, “Cooperation diversity through coding,” in *Proc. IEEE International Symposium on Information Theory (ISIT’02)*, Lausanne, Switzerland, Jul. 2002, p. 220.
- [173] J. N. Laneman and G. W. Wornell, “Distributed space-time-coded protocols for exploiting cooperative diversity in wireless networks,” *IEEE Transactions on Information Theory*, vol. 49, no. 10, pp. 2415–2425, Oct. 2003.
- [174] J. N. Laneman, D. N. C. Tse, and G. W. Wornell, “Cooperative diversity in wireless networks: efficient protocols and outage behavior,” *IEEE Transactions on Information Theory*, vol. 50, no. 12, pp. 3062–3080, Dec. 2004.
- [175] A. Nosratinia, T. E. Hunter, and A. Hedayat, “Cooperative communication in wireless networks,” *IEEE Communications Magazine*, vol. 42, no. 10, pp. 74–80, Oct. 2004.
- [176] M. Janani, A. Hedayat, T. E. Hunter, and A. Nosratinia, “Coded cooperation in wireless communications: space-time transmission and iterative decoding,” *IEEE Transactions on Signal Processing*, vol. 52, no. 2, pp. 362–371, Feb. 2004.

- [177] T. E. Hunter and A. Nosratinia, "Diversity through coded cooperation," *IEEE Transactions on Wireless Communications*, vol. 5, no. 2, pp. 283–289, Feb. 2006.
- [178] Q. H. Spencer, A. L. Swindlehurst, and M. Haardt, "Zero-forcing methods for downlink spatial multiplexing in multiuser MIMO channels," *IEEE Transactions on Signal Processing*, vol. 52, no. 2, pp. 461–471, Feb. 2004.
- [179] Q. H. Spencer, C. B. Peel, A. L. Swindlehurst, and M. Haardt, "An introduction to the multi-user MIMO downlink," *IEEE Communications Magazine*, vol. 42, no. 10, pp. 60–67, Oct. 2004.
- [180] L.-U. Choi and R. D. Murch, "A transmit preprocessing technique for multiuser MIMO systems using a decomposition approach," *IEEE Transactions on Wireless Communications*, vol. 3, no. 1, pp. 20–24, Jan. 2004.
- [181] H. Zhang and H. Dai, "Cochannel interference mitigation and cooperative processing in downlink multicell multiuser MIMO networks," *EURASIP J. Wireless Commun. Netw.*, vol. 2004, no. 2, pp. 222–235, doi:10.1155/S1687147204406148, 2004. [Online]. Available: <http://downloads.hindawi.com/journals/wcn/2004/202654.pdf>
- [182] G. Caire, S. A. Ramprasad, H. C. Papadopoulos, C. Pepin, and C.-E. W. Sundberg, "Multiuser MIMO downlink with limited inter-cell cooperation: approximate interference alignment in time, frequency and space," in *Proc. 46th Annual Allerton Conference on Communication, Control, and Computing (Allerton'08)*, Urbana-Champaign, IL, USA, Sep. 2008, pp. 730–737.
- [183] G. Caire, N. Jindal, M. Kobayashi, and N. Ravindran, "Multiuser MIMO achievable rates with downlink training and channel state feedback," *IEEE Transactions on Information Theory*, vol. 56, no. 6, pp. 2845–2866, Jun. 2010.
- [184] A. Carleial, "A case where interference does not reduce capacity," *IEEE Transactions on Information Theory*, vol. 21, no. 5, pp. 569–570, Sep. 1975.
- [185] T. Han and K. Kobayashi, "A new achievable rate region for the interference channel," *IEEE Transactions on Information Theory*, vol. 27, no. 1, pp. 49–60, Jan. 1981.
- [186] H. Sato, "The capacity of the gaussian interference channel under strong interference," *IEEE Transactions on Information Theory*, vol. 27, no. 6, pp. 786–788, Nov. 1981.
- [187] M. H. M. Costa, "On the gaussian interference channel," *IEEE Transactions on Information Theory*, vol. 31, no. 5, pp. 607–615, Sep. 1985.
- [188] M. H. M. Costa and A. El Gamal, "The capacity region of the discrete memoryless interference channel with strong interference," *IEEE Transactions on Information Theory*, vol. 33, no. 5, pp. 710–711, Sep. 1987.
- [189] I. Sason, "On achievable rate regions for the gaussian interference channel," *IEEE Transactions on Information Theory*, vol. 50, no. 6, pp. 1345–1356, Jun. 2004.
- [190] G. Kramer, "Review of rate regions for interference channels," in *Proc. International Zurich Seminar on Communications*, Zurich, Switzerland, Feb. 2006, pp. 162–165.
- [191] S. A. Jafar and M. J. Fakhereddin, "Degrees of freedom for the MIMO interference channel," *IEEE Transactions on Information Theory*, vol. 53, no. 7, pp. 2637–2642, Jul. 2007.
- [192] R. H. Etkin, D. N. C. Tse, and H. Wang, "Gaussian interference channel capacity to within one bit," *IEEE Transactions on Information Theory*, vol. 54, no. 12, pp. 5534–5562, Dec. 2008.
- [193] S. Vishwanath, N. Jindal, and A. Goldsmith, "The 'Z' channel," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'03)*, San Francisco, CA, USA, Dec. 2003, pp. 1726–1730.
- [194] M. A. Maddah-Ali, A. S. Motahari, and A. K. Khandani, "Communication over MIMO X channels: interference alignment, decomposition, and performance analysis," *IEEE Transactions on Information Theory*, vol. 54, no. 8, pp. 3457–3470, Aug. 2008.
- [195] S. A. Jafar and S. Shamai (Shitz), "Degrees of freedom region of the MIMO X channel," *IEEE Transactions on Information Theory*, vol. 54, no. 1, pp. 151–170, Jan. 2008.
- [196] V. R. Cadambe and S. A. Jafar, "Interference alignment and the degrees of freedom of wireless X networks," *IEEE Transactions on Information Theory*, vol. 55, no. 9, pp. 3893–3908, Sep. 2009.
- [197] A. Grant, S. V. Hanly, J. S. Evans, and R. Muller, "Distributed decoding for Wyner cellular systems," in *Proc. 5th Australian Communications Theory Workshop (AusCTW'04)*, Newcastle, Australia, Feb. 2004, pp. 77–81.
- [198] H. Zhang, H. Dai, and Q. Zhou, "Base station cooperation for multiuser MIMO: joint transmission and BS selection," in *Proc. 38th Annual Conference on information sciences and systems (CISS'04)*, Princeton, NJ, USA, Mar. 2004, pp. 17–19.
- [199] H. Zhang, N. B. Mehta, A. F. Molisch, J. Zhang, and H. Dai, "Asynchronous interference mitigation in cooperative base station systems," *IEEE Transactions on Wireless Communications*, vol. 7, no. 1, pp. 155–165, Jan. 2008.
- [200] Y. Hadisusanto, L. Thiele, and V. Jungnickel, "Distributed base station cooperation via block-diagonalization and dual-decomposition," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'08)*, New Orleans, LO, Nov. 2008, pp. 1–5.
- [201] T. Mayer, H. Jenkac, and J. Hagenauer, "Turbo base-station cooperation for intercell interference cancellation," in *Proc. IEEE International Conference on Communications (ICC'06)*, Istanbul, Turkey, Jun. 2006, pp. 4977–4982.
- [202] S. Khattak, W. Rave, and G. Fettweis, "Distributed iterative multiuser detection through base station cooperation," *EURASIP J. Wireless Commun. Netw.*, vol. 2008, Article ID 390489, 15 pages, doi:10.1155/2008/390489, 2008. [Online]. Available: <http://downloads.hindawi.com/journals/wcn/2008/390489.pdf>
- [203] E. Aktas, J. S. Evans, and S. V. Hanly, "Distributed decoding in a cellular multiple-access channel," *IEEE Transactions on Wireless Communications*, vol. 7, no. 1, pp. 241–250, Jan. 2008.
- [204] B. L. Ng, J. S. Evans, S. V. Hanly, and D. Aktas, "Distributed downlink beamforming with cooperative base stations," *IEEE Transactions on Information Theory*, vol. 54, no. 12, pp. 5491–5499, Dec. 2008.
- [205] S. Yang, T. Lv, and L. Hanzo, "Base station cooperation in MIMO-aided multi-user multi-cell systems employing distributed probabilistic data association based soft reception," in *Proc. IEEE International Conference on Communications (ICC'11)*, Kyoto, Japan, Jun. 2011, pp. 1–5.
- [206] R. Zakhour and S. V. Hanly, "Base station cooperation on the downlink: large system analysis," *IEEE Transactions on Information Theory*, vol. 58, no. 4, pp. 2079–2106, Apr. 2012.
- [207] M. A. Maddah-Ali, A. S. Motahari, and A. K. Khandani, "Signaling over MIMO multi-base systems: combination of multi-access and broadcast schemes," in *Proc. IEEE International Symposium on Information Theory (ISIT'06)*, Seattle, WA, Jul. 2006, pp. 2104–2108.
- [208] —, "Communication over X channel: signalling and multiplexing gain," Department of Electrical and Computer Engineering, University of Waterloo, Waterloo, ON, Canada, Tech. Rep. UW-ECE-2006-12, Jul. 2006.
- [209] —, "Communication over MIMO X channel: signalling and performance analysis," Department of Electrical and Computer Engineering, University of Waterloo, Waterloo, ON, Canada, Tech. Rep. UW-ECE-2006-27, Dec. 2006.
- [210] S. A. Jafar and S. Shamai (Shitz), "Degrees of freedom of the MIMO X channel," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'07)*, Washington, DC, USA, Nov. 2007, pp. 1632–1636.
- [211] V. R. Cadambe and S. A. Jafar, "Interference alignment and degrees of freedom of the K-user interference channel," *IEEE Transactions on Information Theory*, vol. 54, no. 8, pp. 3425–3441, Aug. 2008.
- [212] S. A. Jafar, "Interference alignment – a new look at signal dimensions in a communication network," *Foundations and Trends in Communications and Information Theory*, vol. 7, no. 1, 2010.
- [213] D. A. Shnidman, "A generalized Nyquist criterion and an optimum linear receiver for a pulse modulation system," *The Bell System Technical Journal*, vol. 46, no. 9, pp. 2163–2177, Nov. 1967.
- [214] A. Kaye and D. George, "Transmission of multiplexed PAM signals over multiple channel and diversity systems," *IEEE Transactions on Communication Technology*, vol. COM-18, no. 5, pp. 520–526, Oct. 1970.
- [215] W. van Etten, "An optimum linear receiver for multiple channel digital transmission systems," *IEEE Transactions on Communications*, vol. 23, no. 8, pp. 828–834, Aug. 1975.
- [216] —, "Maximum likelihood receiver for multiple channel transmission systems," *IEEE Transactions on Communications*, vol. 24, no. 2, pp. 276–283, Feb. 1976.
- [217] D. Horwood and R. Gagliardi, "Signal design for digital multiple access communications," *IEEE Transactions on Communications*, vol. 23, no. 3, pp. 378–383, Mar. 1975.
- [218] K. S. Schneider, "Optimum detection of code division multiplexed signals," *IEEE Transactions on Aerospace and Electronic Systems*, vol. AES-15, no. 1, pp. 181–185, Jan. 1979.
- [219] —, "Crosstalk resistant receiver for M-ary multiplexed communications," *IEEE Transactions on Aerospace and Electronic Systems*, vol. AES-16, no. 4, pp. 426–433, Jul. 1980.
- [220] U. Timor, "Improved decoding scheme for frequency-hopped multilevel FSK system," *The Bell System Technical Journal*, vol. 59, no. 10, pp. 1839–1855, Dec. 1980.

- [221] —, “Multistage decoding of frequency-hopped FSK system,” *The Bell System Technical Journal*, vol. 60, no. 4, pp. 471–483, Apr. 1981.
- [222] S. Verdú, “Optimum sequence detection of asynchronous multiple-access communications,” in *Abstr. IEEE International Symposium on Information Theory (ISIT’83)*, St. Jovite, Canada, Sep. 1983, p. 80.
- [223] —, “Minimum probability of error for asynchronous multiple access communication systems,” in *Proc. IEEE Military Communications Conference (MILCOM’83)*, Washington, DC, Nov. 1983, pp. 213–219.
- [224] —, “Minimum probability of error for asynchronous Gaussian multiple-access channels,” *IEEE Transactions on Information Theory*, vol. IT-32, no. 1, pp. 85–96, Jan. 1986.
- [225] —, “Optimum multiuser asymptotic efficiency,” *IEEE Transactions on Communications*, vol. 34, no. 9, pp. 890–897, Sep. 1986.
- [226] R. Lupas and S. Verdú, “Linear multiuser detectors for synchronous code-division multiple-access channels,” *IEEE Transactions on Information Theory*, vol. 35, no. 1, pp. 123–136, Jan. 1989.
- [227] —, “Near-far resistance of multiuser detectors in asynchronous channels,” *IEEE Transactions on Communications*, vol. 38, no. 4, pp. 496–508, Apr. 1990.
- [228] R. Kohno and M. Hatori, “Cancellation techniques of co-channel interference in asynchronous spread spectrum multiple access systems,” *Electronics and Communications in Japan (Part I: Communications)*, vol. 66, no. 5, pp. 20–29, May 1983. [Online]. Available: <http://dx.doi.org/10.1002/ecja.4400660504>
- [229] R. Kohno, H. Imai, M. Hatori, and S. Pasupathy, “Combinations of an adaptive array antenna and a canceller of interference for direct-sequence spread-spectrum multiple-access system,” *IEEE Journal on Selected Areas in Communications*, vol. 8, no. 4, pp. 675–682, May 1990.
- [230] —, “An adaptive canceller of cochannel interference for spread-spectrum multiple-access communication networks in a power line,” *IEEE Journal on Selected Areas in Communications*, vol. 8, no. 4, pp. 691–699, May 1990.
- [231] M. K. Varanasi and B. Aazhang, “Multistage detection in asynchronous code-division multiple-access communications,” *IEEE Transactions on Communications*, vol. 38, no. 4, pp. 509–519, Apr. 1990.
- [232] —, “Near-optimum detection in synchronous code-division multiple-access systems,” *IEEE Transactions on Communications*, vol. 39, no. 5, pp. 725–736, May 1991.
- [233] —, “Optimally near-far resistant multiuser detection in differentially coherent synchronous channels,” *IEEE Transactions on Information Theory*, vol. 37, no. 4, pp. 1006–1018, Jul. 1991.
- [234] Y. C. Yoon, R. Kohno, and H. Imai, “A spread-spectrum multiaccess system with cochannel interference cancellation for multipath fading channels,” *IEEE Journal on Selected Areas in Communications*, vol. 11, no. 7, pp. 1067–1075, Sep. 1993.
- [235] D. Divsalar, M. K. Simon, and D. Raphaeli, “Improved parallel interference cancellation for CDMA,” *IEEE Transactions on Communications*, vol. 46, no. 2, pp. 258–268, Feb. 1998.
- [236] R. M. Buehrer and B. D. Woerner, “Analysis of adaptive multistage interference cancellation for CDMA using an improved gaussian approximation,” *IEEE Transactions on Communications*, vol. 44, no. 10, pp. 1308–1321, Oct. 1996.
- [237] T. Masamura, “Spread spectrum multiple access system with intrasystem interference cancellation,” *IEICE Transactions*, vol. E71, no. 3, pp. 224–231, Mar. 1988.
- [238] A. J. Viterbi, “Very low rate convolution codes for maximum theoretical performance of spread-spectrum multiple-access channels,” *IEEE Journal on Selected Areas in Communications*, vol. 8, no. 4, pp. 641–649, May 1990.
- [239] Z. Xie, C. K. Rushforth, and R. T. Short, “Multiuser signal detection using sequential decoding,” *IEEE Transactions on Communications*, vol. 38, no. 5, pp. 578–583, May 1990.
- [240] Z. Xie, R. T. Short, and C. K. Rushforth, “A family of suboptimum detectors for coherent multiuser communications,” *IEEE Journal on Selected Areas in Communications*, vol. 8, no. 4, pp. 683–690, May 1990.
- [241] Z. Xie, C. K. Rushforth, R. T. Short, and T. K. Moon, “Joint signal detection and parameter estimation in multiuser communications,” *IEEE Transactions on Communications*, vol. 41, no. 8, pp. 1208–1216, Aug. 1993.
- [242] A. Duel-Hallen, “Decorrelating decision-feedback multiuser detector for synchronous code-division multiple-access channel,” *IEEE Transactions on Communications*, vol. 41, no. 2, pp. 285–290, Feb. 1993.
- [243] —, “A family of multiuser decision-feedback detectors for asynchronous code-division multiple-access channels,” *IEEE Transactions on Communications*, vol. 43, no. 2/3/4, pp. 421–434, Feb./Mar./Apr. 1995.
- [244] P. R. Patel and J. M. Holtzman, “Analysis of a simple successive interference cancellation scheme in a DS/CDMA system,” *IEEE Journal on Selected Areas in Communications*, vol. 12, no. 5, pp. 796–807, Jun. 1994.
- [245] M. K. Varanasi, “Decision feedback multiuser detection: a systematic approach,” *IEEE Transactions on Information Theory*, vol. 45, no. 1, pp. 219–240, Jan. 1999.
- [246] A. L. C. Hui and K. B. Letaief, “Successive interference cancellation for multiuser asynchronous DS/CDMA detectors in multipath fading links,” *IEEE Transactions on Communications*, vol. 46, no. 3, pp. 384–391, Mar. 1998.
- [247] S. Verdú and S. Shamai (Shitz), “Spectral efficiency of CDMA with random spreading,” *IEEE Transactions on Information Theory*, vol. 45, no. 2, pp. 622–640, Mar. 1999.
- [248] X. Wang and H. V. Poor, *Wireless Communication Systems: Advanced Techniques for Signal Reception*, 1st ed. Upper Saddle River, NJ, USA: Prentice Hall, 2009.
- [249] A. Paulraj and T. Kailath, “Increasing capacity in wireless broadcast systems using distributed transmission/directional reception,” U.S. Patent 5 345 599, Sep. 6, 1994.
- [250] E. Telatar, “Capacity of multi-antenna gaussian channels,” Technical Report #BL0112170-950615-07TM, AT & T Bell Laboratories, 1995.
- [251] —, “Capacity of multi-antenna gaussian channels,” *European Transactions on Telecommunications*, vol. 10, no. 6, pp. 585–595, November-December 1999. [Online]. Available: <http://dx.doi.org/10.1002/ett.4460100604>
- [252] G. J. Foschini and M. J. Gans, “On limits of wireless communications in a fading environment when using multiple antennas,” *Wireless Personal Communications*, vol. 6, no. 3, pp. 311–335, Mar. 1998.
- [253] V. Tarokh, N. Seshadri, and A. R. Calderbank, “Space-time codes for high data rate wireless communication: performance criterion and code construction,” *IEEE Transactions on Information Theory*, vol. 44, no. 2, pp. 744–765, Mar. 1998.
- [254] V. Tarokh, H. Jafarkhani, and A. R. Calderbank, “Space-time block codes from orthogonal designs,” *IEEE Transactions on Information Theory*, vol. 45, no. 5, pp. 1456–1467, Jul. 1999.
- [255] A. F. Naguib, V. Tarokh, N. Seshadri, and A. R. Calderbank, “A space-time coding modem for high-data-rate wireless communications,” *IEEE Journal on Selected Areas in Communications*, vol. 16, no. 8, pp. 1459–1478, Oct. 1998.
- [256] V. Tarokh, H. Jafarkhani, and A. R. Calderbank, “Space-time block coding for wireless communications: performance results,” *IEEE Journal on Selected Areas in Communications*, vol. 17, no. 3, pp. 451–460, Mar. 1999.
- [257] V. Tarokh, A. F. Naguib, N. Seshadri, and A. R. Calderbank, “Space-time codes for high data rate wireless communication: performance criteria in the presence of channel estimation errors, mobility, and multiple paths,” *IEEE Transactions on Communications*, vol. 47, no. 2, pp. 199–207, Feb. 1999.
- [258] H. Jafarkhani, “A quasi-orthogonal space-time block code,” *IEEE Transactions on Communications*, vol. 49, no. 1, pp. 1–4, Jan. 2001.
- [259] H. Jafarkhani and N. Seshadri, “Super-orthogonal space-time trellis codes,” *IEEE Transactions on Information Theory*, vol. 49, no. 4, pp. 937–950, Apr. 2003.
- [260] S. Alamouti, “A simple transmit diversity technique for wireless communications,” *IEEE Journal on Selected Areas in Communications*, vol. 16, no. 8, pp. 1451–1458, Oct. 1998.
- [261] H. Jafarkhani, *Space-Time Coding: Theory and Practice*. Cambridge University Press, 2005.
- [262] D. Divsalar and M. K. Simon, “Multiple-symbol differential detection of MPSK,” *IEEE Transactions on Communications*, vol. 38, no. 3, pp. 300–308, Mar. 1990.
- [263] V. Tarokh and H. Jafarkhani, “A differential detection scheme for transmit diversity,” *IEEE Journal on Selected Areas in Communications*, vol. 18, no. 7, pp. 1169–1174, Jul. 2000.
- [264] H. Jafarkhani and V. Tarokh, “Multiple transmit antenna differential detection from generalized orthogonal designs,” *IEEE Transactions on Information Theory*, vol. 47, no. 6, pp. 2626–2631, Sep. 2001.
- [265] B. L. Hughes, “Differential space-time modulation,” *IEEE Transactions on Information Theory*, vol. 46, no. 7, pp. 2567–2578, Nov. 2000.
- [266] D. Warrier and U. Madhow, “Spectrally efficient noncoherent communication,” *IEEE Transactions on Information Theory*, vol. 48, no. 3, pp. 651–668, Mar. 2002.

- [267] R. Schober and L. Lampe, "Noncoherent receivers for differential space-time modulation," *IEEE Transactions on Communications*, vol. 50, no. 5, pp. 768–777, May 2002.
- [268] B. Hassibi and B. M. Hochwald, "How much training is needed in multiple-antenna wireless links?" *IEEE Transactions on Information Theory*, vol. 49, no. 4, pp. 951–963, Apr. 2003.
- [269] L. Lampe, R. Schober, V. Pauli, and C. Windpassinger, "Multiple-symbol differential sphere decoding," *IEEE Transactions on Communications*, vol. 53, no. 12, pp. 1981–1985, Dec. 2005.
- [270] L. Hanzo, Y. Akhtman, L. Wang, and M. Jiang, *MIMO-OFDM for LTE, WiFi and WiMAX: Coherent versus Non-Coherent and Cooperative Turbo-Transceivers*. Chichester, UK: Wiley, 2010.
- [271] H. El Gamal, A. R. Hammons, Y. Liu, M. P. Fitz, and O. Y. Takeshita, "On the design of space-time and space-frequency codes for MIMO frequency-selective fading channels," *IEEE Transactions on Information Theory*, vol. 49, no. 9, pp. 2277–2292, Sep. 2003.
- [272] T. Abe and T. Matsumoto, "Space-time turbo equalization in frequency-selective MIMO channels," *IEEE Transactions on Vehicular Technology*, vol. 52, no. 3, pp. 469–475, May 2003.
- [273] X. Zhu and R. D. Murch, "Layered space-frequency equalization in a single-carrier MIMO system for frequency-selective channels," *IEEE Transactions on Wireless Communications*, vol. 3, no. 3, pp. 701–708, May 2004.
- [274] X. Ma, L. Yang, and G. B. Giannakis, "Optimal training for MIMO frequency-selective fading channels," *IEEE Transactions on Wireless Communications*, vol. 4, no. 2, pp. 453–466, Mar. 2005.
- [275] Z. Wang and G. B. Giannakis, "Wireless multicarrier communications—Where Fourier meets Shannon," *IEEE Signal Processing Magazine*, vol. 17, no. 3, pp. 29–48, May 2000.
- [276] W. T. Webb, L. Hanzo, and R. Steele, "Bandwidth efficient QAM schemes for Rayleigh fading channels," *IEE Proceedings I (Communications, Speech and Vision)*, vol. 138, no. 3, pp. 169–175, Jun. 1991.
- [277] W. T. Webb and R. Steele, "Variable rate QAM for mobile radio," *IEEE Transactions on Communications*, vol. 43, no. 7, pp. 2223–2230, Jul. 1995.
- [278] X. Dong, T. T. Tjhung, and F. Adachi, "Error probability analysis for 16 STAR-QAM in frequency-selective Rician fading with diversity reception," *IEEE Transactions on Vehicular Technology*, vol. 47, no. 3, pp. 924–935, Aug. 1998.
- [279] X. Dong, N. C. Beaulieu, and P. H. Wittke, "Error probabilities of two-dimensional M-ary signaling in fading," *IEEE Transactions on Communications*, vol. 47, no. 3, pp. 352–355, Mar. 1999.
- [280] J. Forney, G. D. and G. Ungerboeck, "Modulation and coding for linear Gaussian channels," *IEEE Transactions on Information Theory*, vol. 44, no. 6, pp. 2384–2415, Oct. 1998.
- [281] I. Nevat, G. W. Peters, and J. Yuan, "Detection of Gaussian constellations in MIMO systems under imperfect CSI," *IEEE Transactions on Communications*, vol. 58, no. 4, pp. 1151–1160, Apr. 2010.
- [282] D. E. Knuth, *Seminumerical Algorithms*, 3rd ed., ser. The Art of Computer Programming. Reading, Massachusetts: Addison-Wesley, 1997.
- [283] R. F. H. Fischer and C. Windpassinger, "Real versus complex-valued equalisation in V-BLAST systems," *Electronics Letters*, vol. 39, no. 5, pp. 470–471, Mar. 2003.
- [284] M. Siti and M. P. Fitz, "A novel soft-output layered orthogonal lattice detector for multiple antenna communications," in *Proc. IEEE International Conference on Communications (ICC'06)*, vol. 4, Istanbul, Turkey, Jun. 2006, pp. 1686–1691.
- [285] L. Azzam and E. Ayanoglu, "Reduced complexity sphere decoding via a reordered lattice representation," *IEEE Transactions on Communications*, vol. 57, no. 9, pp. 2564–2569, Sep. 2009.
- [286] T.-H. Liu and C.-N. Chiu, "On fast preprocessing schemes for the real-valued spatially multiplexed MIMO detectors," *International Journal of Communication Systems*, 2012. [Online]. Available: <http://dx.doi.org/10.1002/dac.2365>
- [287] F. D. Neeser and J. L. Massey, "Proper complex random processes with applications to information theory," *IEEE Transactions on Information Theory*, vol. 39, no. 4, pp. 1293–1302, Jul. 1993.
- [288] T. Adali, P. Schreier, and L. Scharf, "Complex-valued signal processing: The proper way to deal with impropriety," *IEEE Transactions on Signal Processing*, vol. 59, no. 11, pp. 5101–5125, Nov. 2011.
- [289] D. Mandic and S. L. Goh, *Complex Valued Nonlinear Adaptive Filters: Noncircularity, Widely Linear and Neural Models*, ser. Adaptive and Learning Systems for Signal Processing, Communications and Control Series. John Wiley & Sons, 2009.
- [290] D. W. Tufts, "Nyquist's problem – the joint optimization of transmitter and receiver in pulse amplitude modulation," *Proceedings of the IEEE*, vol. 53, no. 3, pp. 248–259, Mar. 1965.
- [291] Y. G. Li, J. H. Winters, and N. R. Sollenberger, "MIMO-OFDM for wireless communications: signal detection with enhanced channel estimation," *IEEE Transactions on Communications*, vol. 50, no. 9, pp. 1471–1477, Sep. 2002.
- [292] B. Lu, G. Yue, and X. Wang, "Performance analysis and design optimization of LDPC-coded MIMO OFDM systems," *IEEE Transactions on Signal Processing*, vol. 52, no. 2, pp. 348–361, Feb. 2004.
- [293] A. Zanella, M. Chiani, and M. Z. Win, "MMSE reception and successive interference cancellation for MIMO systems with high spectral efficiency," *IEEE Transactions on Wireless Communications*, vol. 4, no. 3, pp. 1244–1253, May 2005.
- [294] S. Chen, A. Livingstone, and L. Hanzo, "Minimum bit-error rate design for space-time equalization-based multiuser detection," *IEEE Transactions on Communications*, vol. 54, no. 5, pp. 824–832, May 2006.
- [295] D. P. Palomar, M. Bengtsson, and B. Ottersten, "Minimum BER linear transceivers for MIMO channels via primal decomposition," *IEEE Transactions on Signal Processing*, vol. 53, no. 8, pp. 2866–2882, Aug. 2005.
- [296] D. Wübben, R. Böhnke, V. Kühn, and K.-D. Kammeyer, "MMSE extension of V-BLAST based on sorted QR decomposition," in *Proc. IEEE 58th Vehicular Technology Conference (VTC'03-Fall)*, Orlando, USA, Oct. 2003, pp. 508–512.
- [297] K.-W. Wong, C.-Y. Tsui, and R. S. Cheng, "A low complexity architecture of the V-BLAST system," in *Proc. IEEE Wireless Communications and Networking Conference (WCNC'00)*, Chicago, IL, USA, Sep. 2000, pp. 310–314.
- [298] R. Böhnke, D. Wübben, V. Kühn, and K.-D. Kammeyer, "Reduced complexity MMSE detection for BLAST architectures," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'03)*, San Francisco, USA, Dec. 2003, pp. 2258–2262.
- [299] B. Hassibi, "An efficient square-root algorithm for BLAST," in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP'00)*, Istanbul, Turkey, Jun. 2000, pp. 737–740.
- [300] J. Benesty, Y. Huang, and J. Chen, "A fast recursive algorithm for optimum sequential signal detection in a BLAST system," *IEEE Transactions on Signal Processing*, vol. 51, no. 7, pp. 1722–1730, Jul. 2003.
- [301] T.-H. Liu, "Some results for the fast MMSE-SIC detection in spatially multiplexed MIMO systems," *IEEE Transactions on Wireless Communications*, vol. 8, no. 11, pp. 5443–5448, Nov. 2009.
- [302] W. H. Chin, A. G. Constantinides, and D. B. Ward, "Parallel multistage detection for multiple antenna wireless systems," *Electronics Letters*, vol. 38, no. 12, pp. 597–599, 2002.
- [303] Z. Luo, M. Zhao, S. Liu, and Y. Liu, "Generalized parallel interference cancellation with near-optimal detection performance," *IEEE Transactions on Signal Processing*, vol. 56, no. 1, pp. 304–312, Jan. 2008.
- [304] C. Studer, S. Fateh, and D. Seethaler, "ASIC implementation of soft-input soft-output MIMO detection using MMSE parallel interference cancellation," *IEEE Journal of Solid-State Circuits*, vol. 46, no. 7, pp. 1754–1765, Jul. 2011.
- [305] E. Viterbo and E. Biglieri, "A universal decoding algorithm for lattice codes," in *Proc. GRETSI 14-ème Colloque*, Juan-les-Pins, France, Sep. 1993.
- [306] Y. H. Wu, Y. T. Liu, H.-C. Chang, Y.-C. Liao, and H.-C. Chang, "Early-pruned K-best sphere decoding algorithm based on radius constraints," in *Proc. IEEE International Conference on Communications (ICC'08)*, Beijing, China, May 2008, pp. 4496–4500.
- [307] T. Fukatani, R. Matsumoto, and T. Uyematsu, "Two methods for decreasing the computational complexity of the MIMO ML decoder," *IEICE Transactions on Fundamentals of Electronics, Communications and Computer Sciences*, vol. E87-A, no. 10, pp. 2571–2576, Oct. 2004.
- [308] A. Okawado, R. Matsumoto, and T. Uyematsu, "Near ML detection using Dijkstra's algorithm with bounded list size over MIMO channels," in *Proc. IEEE International Symposium on Information Theory (ISIT'2008)*, Toronto, ON, Jul. 2008, pp. 2022–2025.
- [309] Z.-Q. Luo, W.-K. Ma, A. M.-C. So, Y. Ye, and S. Zhang, "Semidefinite relaxation of quadratic optimization problems," *IEEE Signal Processing Magazine*, vol. 27, no. 3, pp. 20–34, May 2010.
- [310] Z.-Q. Luo and W. Yu, "An introduction to convex optimization for communications and signal processing," *IEEE Journal on Selected Areas in Communications*, vol. 24, no. 8, pp. 1426–1438, Aug. 2006.
- [311] Y.-C. Liang, S. Sun, and C. K. Ho, "Block-iterative generalized decision feedback equalizers for large MIMO systems: algorithm design

- and asymptotic performance analysis," *IEEE Transactions on Signal Processing*, vol. 54, no. 6, pp. 2035–2048, Jun. 2006.
- [312] Y.-C. Liang, G. Pan, and Z. D. Bai, "Asymptotic performance of MMSE receivers for large systems using random matrix theory," *IEEE Transactions on Information Theory*, vol. 53, no. 11, pp. 4173–4190, Nov. 2007.
- [313] Y.-C. Liang, E. Y. Cheu, L. Bai, and G. Pan, "On the relationship between MMSE-SIC and BI-GDFE receivers for large multiple-input multiple-output channels," *IEEE Transactions on Signal Processing*, vol. 56, no. 8, pp. 3627–3637, Aug. 2008.
- [314] K. Vardhan, S. K. Mohammed, A. Chockalingam, and B. S. Rajan, "A low-complexity detector for large MIMO systems and multicarrier CDMA systems," *IEEE Journal on Selected Areas in Communications*, vol. 26, no. 3, pp. 473–485, Apr. 2008.
- [315] B. S. Rajan, S. K. Mohammed, A. Chockalingam, and N. Srinidhi, "Low-complexity near-ML decoding of large non-orthogonal STBCs using reactive tabu search," in *Proc. IEEE International Symposium on Information Theory (ISIT'09)*, Seoul, Korea, Jun. 2009, pp. 1993–1997.
- [316] S. K. Mohammed, A. Zaki, A. Chockalingam, and B. S. Rajan, "High-rate space-time coded large-MIMO systems: Low-complexity detection and channel estimation," *IEEE Journal of Selected Topics in Signal Processing*, vol. 3, no. 6, pp. 958–974, Dec. 2009.
- [317] A. Chockalingam, "Low-complexity algorithms for large-MIMO detection," in *Proc. 4th International Symposium on Communications, Control and Signal Processing (ISCCSP'10)*, Limassol, Cyprus, Mar. 2010, pp. 1–6.
- [318] T. Datta, N. Srinidhi, A. Chockalingam, and B. S. Rajan, "A hybrid RTS-BP algorithm for improved detection of large-MIMO M-QAM signals," in *Proc. National Conference on Communications (NCC'11)*, Bangalore, India, Jan. 2011, pp. 1–5.
- [319] P. Som, T. Datta, N. Srinidhi, A. Chockalingam, and B. S. Rajan, "Low-complexity detection in large-dimension MIMO-ISI channels using graphical models," *IEEE Journal of Selected Topics in Signal Processing*, vol. 5, no. 8, pp. 1497–1511, Dec. 2011.
- [320] A. Kumar, S. Chandrasekaran, A. Chockalingam, and B. S. Rajan, "Near-optimal large-MIMO detection using randomized MCMC and randomized search algorithms," in *Proc. IEEE International Conference on Communications (ICC'11)*, Jun. 2011, pp. 1–5.
- [321] T. Datta, N. A. Kumar, A. Chockalingam, and B. S. Rajan, "A novel monte-carlo-sampling-based receiver for large-scale uplink multiuser MIMO systems," *IEEE Transactions on Vehicular Technology*, vol. 62, no. 7, pp. 3019–3038, Sep. 2013.
- [322] K. A. Singhal, T. Datta, and A. Chockalingam, "Lattice reduction aided detection in large-MIMO systems," in *Proc. IEEE 14th Workshop on Signal Processing Advances in Wireless Communications (SPAWC'13)*, Darmstadt, Germany, Jun. 2013, pp. 594–598.
- [323] P. Suthisopapan, K. Kasai, A. Meesomboon, and V. Imtawil, "Achieving near capacity of non-binary LDPC coded large MIMO systems with a novel ultra low-complexity soft-output detector," *IEEE Transactions on Wireless Communications*, vol. 12, no. 10, pp. 5185–5199, Oct. 2013.
- [324] T. Lakshmi Narasimhan and A. Chockalingam, "Channel hardening-exploiting message passing (CHEMP) receiver in large-scale MIMO systems," *IEEE Journal of Selected Topics in Signal Processing*, vol. 8, no. 5, pp. 847–860, Oct. 2014.
- [325] M. Cirkic and E. Larsson, "SUMIS: Near-optimal soft-in soft-out MIMO detection with low and fixed complexity," *IEEE Transactions on Signal Processing*, vol. 62, no. 12, pp. 3084–3097, Jun. 2014.
- [326] S. Wu, L. Kuang, Z. Ni, J. Lu, D. Huang, and Q. Guo, "Low-complexity iterative detection for large-scale multiuser MIMO-OFDM systems using approximate message passing," *IEEE Journal of Selected Topics in Signal Processing*, vol. 8, no. 5, pp. 902–915, Oct. 2014.
- [327] B. Yin, M. Wu, G. Wang, C. Dick, J. R. Cavallaro, and C. Studer, "A 3.8 Gb/s large-scale MIMO detector for 3GPP LTE-Advanced," in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP'14)*, Florence, Italy, May 2014, pp. 3879–3883.
- [328] M. Wu, B. Yin, G. Wang, C. Dick, J. Cavallaro, and C. Studer, "Large-scale MIMO detection for 3GPP LTE: Algorithm and FPGA implementation," *IEEE Journal of Selected Topics in Signal Processing*, vol. 8, no. 5, pp. 916–929, Oct. 2014.
- [329] J. G. Andrews, "Interference cancellation for cellular systems: a contemporary overview," *IEEE Wireless Communications Magazine*, vol. 12, no. 2, p. 2005, Apr. 19–29.
- [330] A. J. Viterbi, "Error bounds for convolutional codes and an asymptotically optimum decoding algorithm," *IEEE Transactions on Information Theory*, vol. 13, no. 2, pp. 260–269, Apr. 1967.
- [331] J. Omura, "On the Viterbi decoding algorithm," *IEEE Transactions on Information Theory*, vol. 15, no. 1, pp. 177–179, Jan. 1969.
- [332] G. D. Forney, "Maximum-likelihood sequence estimation of digital sequences in the presence of intersymbol interference," *IEEE Transactions on Information Theory*, vol. 18, no. 3, pp. 363–378, May 1972.
- [333] —, "The Viterbi algorithm," *Proceedings of the IEEE*, vol. 61, no. 3, pp. 268–278, Mar. 1973.
- [334] A. J. Viterbi, "A personal history of the Viterbi algorithm," *IEEE Signal Processing Magazine*, vol. 23, no. 4, pp. 120–142, Jul. 2006.
- [335] S. U. H. Qureshi, "Adaptive equalization," *Proceedings of the IEEE*, vol. 73, no. 9, pp. 1349–1387, Sep. 1985.
- [336] M. Honig, U. Madhoo, and S. Verdú, "Blind adaptive multiuser detection," *IEEE Transactions on Information Theory*, vol. 41, no. 4, pp. 944–960, Jul. 1995.
- [337] L. Tong, G. Xu, and T. Kailath, "Blind identification and equalization based on second-order statistics: a time domain approach," *IEEE Transactions on Information Theory*, vol. 40, no. 2, pp. 340–349, Mar. 1994.
- [338] X. Wang and H. V. Poor, "Blind equalization and multiuser detection in dispersive cdma channels," *IEEE Transactions on Communications*, vol. 46, no. 1, pp. 91–103, Jan. 1998.
- [339] W. H. Tranter, D. P. Taylor, and R. E. Ziemer, Eds., *The best of the best: fifty years of communications and networking research*. Hoboken, NJ: John Wiley & Sons, 2007.
- [340] S. Verdú, "Optimum multi-user signal detection," Ph.D. dissertation, Department of Electrical and Computer Engineering, University of Illinois at Urbana-Champaign, Urbana, IL, Aug. 1984.
- [341] H. V. Poor and S. Verdú, "Single-user detectors for multiuser channels," *IEEE Transactions on Communications*, vol. 36, no. 1, pp. 50–60, Jan. 1988.
- [342] S. Verdú, "Demodulation in the presence of multiuser interference: progress and misconceptions," in *Intelligent Methods in Signal Processing and Communications*, D. Docampo, A. R. Figueiras-Vidal, and F. Pérez-González, Eds. Boston: Birkhäuser, 1997, pp. 15–45. [Online]. Available: http://dx.doi.org/10.1007/978-1-4612-2018-3_2
- [343] P. Li, D. Paul, R. Narasimhan, and J. Cioffi, "On the distribution of SINR for the MMSE MIMO receiver and performance analysis," *IEEE Transactions on Information Theory*, vol. 52, no. 1, pp. 271–286, Jan. 2006.
- [344] A. H. Mehana and A. Nosratinia, "Diversity of MMSE MIMO receivers," *IEEE Transactions on Information Theory*, vol. 58, no. 11, pp. 6788–6805, Nov. 2012.
- [345] K. Abend, T. J. Harley, B. D. Fritchman, and C. Gumacos, "On optimum receivers for channels having memory," *IEEE Transactions on Information Theory*, vol. 14, no. 6, pp. 819–820, Nov. 1968.
- [346] K. Abend and B. D. Fritchman, "Statistical detection for communication channels with intersymbol interference," *Proceedings of the IEEE*, vol. 58, no. 5, pp. 779–785, May 1970.
- [347] L. Bahl, J. Cocke, F. Jelinek, and J. Raviv, "Optimal decoding of linear codes for minimizing symbol error rate," *IEEE Transactions on Information Theory*, vol. 20, no. 2, pp. 284–287, Mar. 1974.
- [348] S. Verdú and H. V. Poor, "Backward, forward and backward-forward dynamic programming models under commutativity conditions," in *Proc. the 23rd IEEE Conference on Decision and Control (CDC'84)*, Las Vegas, NV, Dec. 1984, pp. 1081–1086.
- [349] —, "Abstract dynamic programming models under commutativity conditions," *SIAM Journal on Control and Optimization*, vol. 25, no. 4, pp. 990–1006, Jul. 1987. [Online]. Available: <http://epubs.siam.org/doi/abs/10.1137/0325054>
- [350] M. R. Garey and D. S. Johnson, *Computers and Intractability: A Guide to the Theory of NP-Completeness*. San Francisco, USA: W. H. Freeman and Co., 1979.
- [351] T. H. Cormen, C. E. Leiserson, R. L. Rivest, and C. Stein, *Introduction to Algorithms*, 3rd ed. Cambridge, Massachusetts: MIT Press, 2009.
- [352] D. C. Garrett, L. M. Davis, and G. K. Woodward, "19.2 Mbit/s 4×4 BLAST/MIMO detector with soft ML outputs," *Electronics Letters*, vol. 39, no. 2, pp. 233–235, Jan. 2003.
- [353] A. Burg, N. Felber, and W. Fichtner, "A 50 Mbps 4×4 maximum likelihood decoder for multiple-input multiple-output systems with QPSK modulation," in *Proc. IEEE International Conference on Electronics, Circuits and Systems (ICECS'03)*, Sharjah, United Arab Emirates, Dec. 2003, pp. 332–335.
- [354] J. Hoydis, S. ten Brink, and M. Debbah, "Massive mimo in the ul/dl of cellular networks: How many antennas do we need?" *IEEE Journal on Selected Areas in Communications*, vol. 31, no. 2, pp. 160–171, Feb. 2013.
- [355] R. Lupas and S. Verdú, "Asymptotic efficiency of linear multiuser detectors," in *Proc. the 25th IEEE Conference on Decision and Control (CDC'86)*, Dec. 1986, pp. 2094–2100.

- [356] —, “Optimum near-far resistance of linear detectors for code-division multiple-access channels,” in *Abstr. IEEE International Symposium on Information Theory (ISIT’88)*, Jun. 1988, p. 14. [Online]. Available: <http://www.princeton.edu/~verdu/reprints/OptimumNear-FarResistanceOfLinearDetectors.pdf>
- [357] S. M. Kay, *Fundamentals of Statistical Signal Processing, Volume I: Estimation Theory*. Prentice Hall, 1993.
- [358] Z. Xie, R. T. Short, and C. K. Rushforth, “Suboptimum coherent detection of direct-sequence multiple-access signals,” in *Proc. IEEE Military Communications Conference (MILCOM’89)*, Boston, MA, Oct. 1989, pp. 128–133.
- [359] H. V. Poor and S. Verdú, “Probability of error in MMSE multiuser detection,” *IEEE Transactions on Information Theory*, vol. 43, no. 3, pp. 858–871, May 1997.
- [360] N. B. Mandayam and B. Aazhang, “Generalized sensitivity analysis of optical code division multiple access systems,” in *Proc. 27th Annual Conference on Information Sciences and Systems (CISS’93)*, Baltimore, MD, Mar. 1993, pp. 302–307.
- [361] —, “Gradient estimation for stochastic optimization of optical code-division multiple-access systems: Part I – generalized sensitivity analysis,” *IEEE Journal on Selected Areas in Communications*, vol. 15, no. 4, pp. 731–741, May 1997.
- [362] —, “Gradient estimation for stochastic optimization of optical code-division multiple-access systems: Part II – adaptive detection,” *IEEE Journal on Selected Areas in Communications*, vol. 15, no. 4, pp. 742–750, May 1997.
- [363] —, “Gradient estimation for sensitivity analysis and adaptive multiuser interference rejection in code-division multiple-access systems,” *IEEE Transactions on Communications*, vol. 45, no. 7, pp. 848–858, Jul. 1997.
- [364] A. Burg, S. Haene, D. Perels, P. Luethi, N. Felber, and W. Fichtner, “Algorithm and VLSI architecture for linear MMSE detection in MIMO-OFDM systems,” in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS’06)*, Island of Kos, Greece, May 2006, pp. 4102–4105.
- [365] S. Yoshizawa and Y. Miyanaga, “VLSI implementation of a 4 × 4 MIMO-OFDM transceiver with an 80-MHz channel bandwidth,” in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS’09)*, Taipei, Republic of China, May 2009, pp. 1743–1746.
- [366] I. N. Psaromiligkos, S. N. Batalama, and D. A. Pados, “On adaptive minimum probability of error linear filter receivers for DS-CDMA channels,” *IEEE Transactions on Communications*, vol. 47, no. 7, pp. 1092–1102, Jul. 1999.
- [367] X. Wang, W.-S. Lu, and A. Antoniou, “Constrained minimum-BER multiuser detection,” in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP’99)*, Phoenix, AZ, USA, Mar. 1999, pp. 2603–2606.
- [368] —, “Constrained minimum-BER multiuser detection,” *IEEE Transactions on Signal Processing*, vol. 48, no. 10, pp. 2903–2909, Oct. 2000.
- [369] C.-C. Yeh, R. R. Lopes, and J. R. Barry, “Approximate minimum bit-error rate multiuser detection,” in *Proc. IEEE Global Telecommunications Conference (GLOBECOM’98)*, Sydney, NSW, Australia, Nov. 1998, pp. 3590–3595.
- [370] C.-C. Yeh and J. R. Barry, “Adaptive minimum bit-error rate equalization for binary signaling,” *IEEE Transactions on Communications*, vol. 48, no. 7, pp. 1226–1235, Jul. 2000.
- [371] S. Chen, A. K. Samangan, B. Mulgrew, and L. Hanzo, “Adaptive minimum-BER linear multiuser detection for DS-CDMA signals in multipath channels,” *IEEE Transactions on Signal Processing*, vol. 49, no. 6, pp. 1240–1247, Jun. 2001.
- [372] P. Bergmans and T. M. Cover, “Cooperative broadcasting,” *IEEE Transactions on Information Theory*, vol. 20, no. 3, pp. 317–324, May 1974.
- [373] T. M. Cover, “Some advances in broadcast channels,” in *Advances in Communication Systems*, A. J. Viterbi, Ed. New York: Academic Press, Inc., 1975, vol. 4, pp. 229–260. [Online]. Available: <http://www-isl.stanford.edu/~cover/papers/paper34.pdf>
- [374] P. Dent, B. Gudmundson, and M. Ewerbring, “CDMA-IC: a novel code division multiple access scheme based on interference cancellation,” in *Proc. 3rd IEEE International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC’92)*, Boston, MA, Oct. 1992, pp. 98–102.
- [375] S. Moshavi, E. G. Kanterakis, and D. L. Schilling, “Multistage linear receivers for DS-CDMA systems,” *International Journal of Wireless Information Networks*, vol. 3, no. 1, pp. 1–17, Jan. 1996. [Online]. Available: <http://dx.doi.org/10.1007/BF02106658>
- [376] S. Kubota, S. Kato, and K. Feher, “Inter-channel interference cancellation technique for CDMA mobile/personal communication systems,” in *Proc. 3rd IEEE International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC’92)*, Boston, MA, Oct. 1992, pp. 112–117.
- [377] —, “Inter-channel interference cancellation technique for CDMA mobile/personal communication base stations,” in *Proc. 2nd IEEE International Symposium on Spread Spectrum Techniques and Applications (ISSSTA’92)*, Yokohama, Japan, Nov. 1992, pp. 91–94.
- [378] P. R. Patel and J. M. Holtzman, “Analysis of a DS/CDMA successive interference cancellation scheme using correlations,” in *Proc. IEEE Global Telecommunications Conference (GLOBECOM’93)*, Houston, TX, USA, Dec. 1993, pp. 76–80.
- [379] J. M. Holtzman, “DS/CDMA successive interference cancellation,” in *Proc. IEEE 3rd International Symposium on Spread Spectrum Techniques and Applications (ISSSTA’94)*, Oulu, Finland, Jul. 1994, pp. 69–78.
- [380] —, “Successive interference cancellation for direct sequence code division multiple access,” in *Proc. IEEE Military Communications Conference (MILCOM’94)*, Fort Monmouth, NJ, Oct. 1994, pp. 997–1001.
- [381] A. S. Gupta and A. C. Singer, “Successive interference cancellation using constellation structure,” *IEEE Transactions on Signal Processing*, vol. 55, no. 12, pp. 5716–5730, Dec. 2007.
- [382] J. G. Andrews and T. H. Meng, “Optimum power control for successive interference cancellation with imperfect channel estimation,” *IEEE Transactions on Wireless Communications*, vol. 2, no. 2, pp. 375–383, Mar. 2003.
- [383] Y. C. Yoon, R. Kohno, and H. Imai, “A spread-spectrum multi-access system with a cascade of co-channel interference cancelers for multipath fading channels,” in *Proc. 2nd IEEE International Symposium on Spread Spectrum Techniques and Applications (ISSSTA’92)*, Yokohama, Japan, Nov. 1992, pp. 87–90.
- [384] R. M. Buehrer, S. P. Nicoloso, and S. Gollamudi, “Linear versus nonlinear interference cancellation,” *Journal of Communication and Networks*, vol. 1, no. 2, pp. 118–133, Jun. 1999.
- [385] D. Guo, L. K. Rasmussen, S. Sun, and T. J. Lim, “A matrix-algebraic approach to linear parallel interference cancellation in CDMA,” *IEEE Transactions on Communications*, vol. 48, no. 1, pp. 152–161, Jan. 2000.
- [386] M. K. Varanasi and B. Aazhang, “An iterative detector for asynchronous spread-spectrum multiple-access systems,” in *Proc. IEEE Global Telecommunications Conference (GLOBECOM’88)*, Nov. 1988, pp. 556–560.
- [387] —, “Probability of error comparison of linear and iterative multiuser detectors,” in *Proc. International Conference on Advances in Communications and Control Systems*, Baton Rouge, LA, Oct. 1988, pp. 54–65.
- [388] A. Duel-Hallen, “Linear and decision-feedback multiuser detectors,” in *Proc. IEEE International Symposium on Information Theory (ISIT’91)*, Budapest, Hungary, Jun. 1991, pp. 24–28.
- [389] —, “Performance of multiuser zero-forcing and MMSE decision-feedback detectors for CDMA channels,” in *Proc. IEEE Global Telecommunications Conference (GLOBECOM’93)*, Houston, TX, USA, Nov. 1993, pp. 82–86.
- [390] Z. Guo and P. Nilsson, “A VLSI implementation of MIMO detection for future wireless communications,” in *Proc. IEEE Proceedings on Personal, Indoor and Mobile Radio Communications (PIMRC’03)*, Beijing, China, Sep. 2003, pp. 2852–2856.
- [391] A. Duel-Hallen and C. Heegard, “Delayed decision-feedback sequence estimation,” *IEEE Transactions on Communications*, vol. 37, no. 5, pp. 428–436, May 1989.
- [392] A. Duel-Hallen, “Equalizers for multiple input/multiple output channels and PAM systems with cyclostationary input sequences,” *IEEE Journal on Selected Areas in Communications*, vol. 10, no. 3, pp. 630–639, Apr. 1992.
- [393] S. Verdú, “Recent progress in multiuser detection,” in *Advances in Communications and Signal Processing*, ser. Lecture Notes in Control and Information Sciences, W. A. Porter and S. C. Kak, Eds. Heidelberg: Springer-Verlag, 1989, vol. 129, pp. 27–38. [Online]. Available: <http://dx.doi.org/10.1007/BFb0042716>
- [394] Z. Xie and C. K. Rushforth, “Multi-user signal detection using sequential decoding,” in *Proc. IEEE Military Communications Conference (MILCOM’88)*, San Diego, CA, USA, Oct. 1988, pp. 983–988.
- [395] Z. Xie, C. K. Rushforth, R. T. Short, and T. K. Moon, “A tree-search algorithm for signal detection and parameter estimation in multi-user

- communications," in *Proc. IEEE Military Communications Conference (MILCOM'90)*, Monterey, CA, USA, Oct. 1990, pp. 796–800.
- [396] L. Wei, L. K. Rasmussen, and R. Wyrwas, "Near optimum tree-search detection schemes for bit-synchronous multiuser CDMA systems over gaussian and two-path rayleigh-fading channels," *IEEE Transactions on Communications*, vol. 45, no. 6, pp. 691–700, Jun. 1997.
- [397] F. Jelinek and J. B. Anderson, *Instrumentable tree encoding of information sources*. School of Electrical Engineering, Cornell University, Ithaca, NY, USA, Sep. 1969.
- [398] —, "Instrumentable tree encoding of information sources," *IEEE Transactions on Information Theory*, vol. 17, no. 1, pp. 118–119, Jan. 1971.
- [399] W. L. Waltmann and R. J. Lambert, "T-algorithm for tridiagonalization," *Journal of the Society for Industrial and Applied Mathematics*, vol. 13, no. 4, pp. 1069–1078, Dec. 1965. [Online]. Available: <http://www.jstor.org/stable/2946426>
- [400] S. J. Simmons, "A reduced-computation trellis decoder with inherent parallelism," Ph.D. dissertation, Department of Electrical and Computer Engineering, Queens University, Kingston, Ontario, Canada, Jun. 1986. [Online]. Available: <http://istec.colostate.edu/~rockey/Papers/PhDThesis.pdf>
- [401] S. J. Simmons and P. Senyshyn, "Reduced-search trellis decoding of coded modulations over ISI channels," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'90)*, Dec. 1990, pp. 393–396.
- [402] S. J. Simmons, "Breadth-first trellis decoding with adaptive effort," *IEEE Transactions on Communications*, vol. 38, no. 1, pp. 3–12, Jan. 1990.
- [403] M. V. Eyuboğlu and S. U. Qureshi, "Reduced-state sequence estimation with set partitioning and decision feedback," *IEEE Transactions on Communications*, vol. 36, no. 1, pp. 13–20, Jan. 1988.
- [404] R. Fano, "A heuristic discussion of probabilistic decoding," *IEEE Transactions on Information Theory*, vol. 9, no. 2, pp. 64–74, Apr. 1963.
- [405] K. S. Zigangirov, "Some sequential decoding procedures," *Problemy Peredachi Informatsii*, vol. 2, no. 4, pp. 13–25, Oct. 1966.
- [406] F. Jelinek, "Fast sequential decoding algorithm using a stack," *IBM Journal of Research and Development*, vol. 13, no. 6, pp. 675–685, Nov. 1969.
- [407] J. L. Massey, "Variable-length codes and the fano metric," *IEEE Transactions on Information Theory*, vol. 18, no. 1, pp. 196–198, Jan. 1972.
- [408] J. B. Anderson and S. Mohan, "Sequential coding algorithms: a survey and cost analysis," *IEEE Transactions on Communications*, vol. 32, no. 2, pp. 169–176, Feb. 1984.
- [409] J. B. Anderson, "Limited search trellis decoding of convolutional codes," *IEEE Transactions on Information Theory*, vol. 35, no. 5, pp. 944–955, Sep. 1989.
- [410] G. J. Pottie and D. P. Taylor, "A comparison of reduced complexity decoding algorithms for trellis codes," *IEEE Journal on Selected Areas in Communications*, vol. 7, no. 9, pp. 1369–1380, Dec. 1989.
- [411] M. Pohst, "On the computation of lattice vectors of minimal length, successive minima and reduced bases with applications," *ACM SIGSAM Bulletin*, vol. 15, no. 1, pp. 37–44, Feb. 1981.
- [412] U. Fincke and M. Pohst, "Improved methods for calculating vectors of short length in a lattice, including a complexity analysis," *Mathematics of Computation*, vol. 44, no. 170, pp. 463–471, Apr. 1985.
- [413] C. P. Schnorr and M. Euchner, "Lattice basis reduction: improved practical algorithms and solving subset sum problems," *Mathematical Programming*, vol. 66, no. 1-3, pp. 181–199, Aug. 1994.
- [414] C.-A. Shen, A. M. Eltawil, K. N. Salama, and S. Mondal, "A best-first soft/hard decision tree searching MIMO decoder for a 4×4 64-QAM system," *IEEE Transactions on Very Large Scale Integration (VLSI) Systems*, vol. 20, no. 8, pp. 1537–1541, Aug. 2012.
- [415] B. Hassibi and H. Vikalo, "On the expected complexity of sphere decoding," in *Proc. 35th Annual Asilomar Conference on Signals, Systems and Computers (Asilomar'01)*, Pacific Grove, CA, USA, Nov. 2001, pp. 1051–1055.
- [416] —, "On the expected complexity of integer least-squares problems," in *Proc. IEEE IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP'02)*, vol. 2, Orlando, FL, USA, May 2002, pp. II-1497–II-1500.
- [417] —, "Maximum-likelihood decoding and integer least-squares: The expected complexity," in *DIMACS Series in Discrete Mathematics and Theoretical Computer Science: Multiantenna channels: capacity, coding and signal processing*, G. J. Foschini and S. Verdú, Eds. New York: American Mathematical Society, 2003, vol. 62, pp. 161–192.
- [418] J. Jaldén and B. Ottersten, "An exponential lower bound on the expected complexity of sphere decoding," in *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing (ICASSP'04)*, vol. 4, Montreal, Canada, May 2004, pp. 393–396.
- [419] B. M. Hochwald and S. ten Brink, "Iterative list sphere decoding to attain capacity on a multi-antenna link," in *Proc. of 39th Annual Allerton Conference On Communication, Control and Computing (Allerton'01)*, Monticello, IL, USA, Oct. 2001, pp. 815–824.
- [420] D. C. Garrett, L. M. Davis, S. ten Brink, B. Hochwald, and G. Knagge, "Silicon complexity for maximum likelihood MIMO detection using spherical decoding," *IEEE Journal of Solid-State Circuits*, vol. 39, no. 9, pp. 1544–1552, Sep. 2004.
- [421] Z. Guo and P. Nilsson, "A VLSI architecture of the Schnorr-Euchner decoder for MIMO systems," in *Proc. IEEE 6th Circuits and Systems Symposium on Emerging Technologies: Frontiers of Mobile and Wireless Communication*, Shanghai, China, May 2004, pp. 65–68.
- [422] M. Wenk, M. Zellweger, A. Burg, N. Felber, and W. Fichtner, "K-best MIMO detection VLSI architectures achieving up to 424 Mbps," in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS'06)*, May 2006, pp. 1151–1154.
- [423] L. G. Barbero and J. S. Thompson, "A fixed-complexity MIMO detector based on the complex sphere decoder," in *Proc. IEEE 7th Workshop on Signal Processing Advances in Wireless Communications (SPAWC'06)*, Cannes, France, Jul. 2006, pp. 1–5.
- [424] D. Patel, V. Smolyakov, M. Shabany, and P. G. Gulak, "VLSI implementation of a WiMAX/LTE compliant low-complexity high-throughput soft-output K-best MIMO detector," in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS'10)*, Paris, France, May 2010, pp. 593–596.
- [425] E. W. Dijkstra, "A note on two problems in connexion with graphs," *Numerische Mathematik*, vol. 1, no. 1, pp. 269–271, 1959. [Online]. Available: <http://dx.doi.org/10.1007/BF01386390>
- [426] W. Xu, Y. Wang, Z. Zhou, and J. Wang, "A computationally efficient exact ML sphere decoder," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'04)*, Dallas, TX, USA, Dec. 2004, pp. 2594–2598.
- [427] W. H. Mow, "Maximum likelihood sequence estimation from the lattice viewpoint," *IEEE Transactions on Information Theory*, vol. 40, no. 5, pp. 1591–1600, Sep. 1994.
- [428] D. Wübben, D. Seethaler, J. Jaldén, and G. Matz, "Lattice reduction," *IEEE Signal Processing Magazine*, vol. 28, no. 3, pp. 70–91, May 2011.
- [429] H. Daudé, P. Flajolet, and B. Vallée, "An analysis of the gaussian algorithm for lattice reduction," in *Proc. of the 1st International Symposium on Algorithmic Number Theory*, Ithaca, NY, 1994, pp. 144–158.
- [430] A. Korkine and G. Zolotareff, "Sur les formes quadratiques," *Mathematische Annalen*, vol. 6, no. 3, pp. 366–389, 1873. [Online]. Available: <http://dx.doi.org/10.1007/BF01442795>
- [431] H. Yao, "Efficient signal, code, and receiver designs for MIMO communication systems," Ph.D. dissertation, 2003.
- [432] W. Z. Zhang, "Wireless receiver designs: From information theory to VLSI implementation," Ph.D. dissertation, 2009.
- [433] C.-P. Schnorr and M. Euchner, "Lattice basis reduction: Improved practical algorithms and solving subset sum problems," *Mathematical programming*, vol. 66, no. 1-3, pp. 181–199, 1994.
- [434] A. K. Lenstra, J. Lenstra, H. W., and L. Lovász, "Factoring polynomials with rational coefficients," *Mathematische Annalen*, vol. 261, no. 4, pp. 515–534, 1982. [Online]. Available: <http://dx.doi.org/10.1007/BF01457454>
- [435] M. Seysen, "Simultaneous reduction of a lattice basis and its reciprocal basis," *Combinatorica*, vol. 13, no. 3, pp. 363–376, 1993. [Online]. Available: <http://dx.doi.org/10.1007/BF01202355>
- [436] D. Seethaler and G. Matz, "Efficient vector perturbation in multi-antenna multi-user systems based on approximate integer relations," in *Proc. 14th European Signal Processing Conference (EUSIPCO'06)*, Florence, Italy, Sep. 2006.
- [437] I. V. L. Clarkson, "Approximation of linear forms by lattice points with applications to signal processing," Ph.D. dissertation, 1997.
- [438] C. Ling, "Approximate lattice decoding: Primal versus dual basis reduction," in *Proc. IEEE International Symposium on Information Theory (ISIT'06)*, Jul. 2006, pp. 1–5.
- [439] H. Napias, "A generalization of the LLL-algorithm over euclidean rings or orders," *Journal de théorie des nombres de Bordeaux*, vol. 8, pp. 387–396, 1996.

- [440] D. Wübben, R. Böhnke, V. Kühn, and K.-D. Kammeyer, "MMSE-based lattice-reduction for near-ML detection of MIMO systems," in *Proc. ITG Workshop on Smart Antennas (WSA'04)*, Mar. 2004, pp. 106–113.
- [441] Y. Bar-Shalom and E. Tse, "Tracking in a cluttered environment with probabilistic data association," *Automatica*, vol. 11, no. 5, pp. 451–460, 1975.
- [442] T. E. Fortmann, Y. Bar-Shalom, and M. Scheffe, "Multi-target tracking using joint probabilistic data association," in *19th IEEE Conference on Decision and Control including the Symposium on Adaptive Processes*, Albuquerque, NM, USA, Dec. 1980, pp. 807–812.
- [443] —, "Sonar tracking of multiple targets using joint probabilistic data association," *IEEE Journal of Oceanic Engineering*, vol. 8, no. 3, pp. 173–184, Jul. 1983.
- [444] Y. Bar-Shalom and X. R. Li, *Estimation and Tracking: Principles, Techniques and Software*. Dedham, MA: Artech House, 1993.
- [445] Y. Bar-Shalom, X. R. Li, and T. Kirubarajan, *Estimation with Applications to Tracking and Navigation: Theory, Algorithms and Software*. John Wiley & Sons, Inc., 2004.
- [446] Y. Bar-Shalom, T. Kirubarajan, and X. Lin, "Probabilistic data association techniques for target tracking with applications to sonar, radar and EO sensors," *IEEE Aerospace and Electronics Systems Magazine*, vol. 20, no. 8, pp. 37–56, 2005.
- [447] Y. Bar-Shalom, F. Daum, and J. Huang, "The probabilistic data association filter," *IEEE Control Systems Magazine*, vol. 29, no. 6, pp. 82–100, Dec. 2009.
- [448] K.-C. Chang and Y. Bar-Shalom, "Joint probabilistic data association for multitarget tracking with possibly unresolved measurements and maneuvers," *IEEE Transactions on Automatic Control*, vol. 29, no. 7, pp. 585–594, Jul. 1984.
- [449] K.-C. Chang, C.-Y. Chong, and Y. Bar-Shalom, "Joint probabilistic data association in distributed sensor networks," *IEEE Transactions on Automatic Control*, vol. 31, no. 10, pp. 889–897, Oct. 1986.
- [450] J. A. Roecker and G. L. Phillis, "Suboptimal joint probabilistic data association," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 29, no. 2, pp. 510–517, Apr. 1993.
- [451] D. Musicki, R. J. Evans, and S. Stankovic, "Integrated probabilistic data association," *IEEE Transactions on Automatic Control*, vol. 39, no. 6, pp. 1237–1241, Jun. 1994.
- [452] D. J. Kershaw and R. J. Evans, "Waveform selective probabilistic data association," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 33, no. 4, pp. 1180–1188, Oct. 1997.
- [453] H. A. P. Blom and E. A. Bloem, "Probabilistic data association avoiding track coalescence," *IEEE Transactions on Automatic Control*, vol. 45, no. 2, pp. 247–259, Feb. 2000.
- [454] T. Kirubarajan and Y. Bar-Shalom, "Probabilistic data association techniques for target tracking in clutter," *Proceedings of the IEEE*, vol. 92, no. 3, pp. 536–557, Mar. 2004.
- [455] D. Musicki and R. J. Evans, "Joint integrated probabilistic data association: JIPDA," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 40, no. 3, pp. 1093–1099, Jul. 2004.
- [456] I. J. Cox, "A review of statistical data association techniques for motion correspondence," *International Journal of Computer Vision*, vol. 10, no. 1, pp. 53–66, Feb. 1993. [Online]. Available: <http://dx.doi.org/10.1007/BF01440847>
- [457] D. Schulz, W. Burgard, D. Fox, and A. B. Cremers, "Tracking multiple moving targets with a mobile robot using particle filters and statistical data association," in *Proc. IEEE International Conference on Robotics and Automation (ICRA'01)*, Seoul, Korea, May 2001, pp. 1665–1670.
- [458] —, "People tracking with mobile robots using sample-based joint probabilistic data association filters," *International Journal of Robotics Research*, vol. 22, no. 2, pp. 99–116, Feb. 2003.
- [459] C. Rasmussen and G. D. Hager, "Probabilistic data association methods for tracking complex visual objects," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 23, no. 6, pp. 560–576, Jun. 2001.
- [460] Z. J. Wang, Z. Han, and K. J. R. Liu, "MIMO-OFDM channel estimation via probabilistic data association based TOAs," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'03)*, San Francisco, CA, USA, Dec. 2003, pp. 626–630.
- [461] —, "A MIMO-OFDM channel estimation approach using time of arrivals," *IEEE Transactions on Wireless Communications*, vol. 4, no. 3, pp. 1207–1213, May 2005.
- [462] S. Yang, T. Lv, and L. Hanzo, "Unified bit-based probabilistic data association aided MIMO detection for high-order QAM," in *Proc. IEEE Wireless Communications and Networking Conference (WCNC'11)*, Cancun, Mexico, Mar. 2011, pp. 1629–1634.
- [463] S. Yang and L. Hanzo, "Iterative detection and decoding using approximate Bayesian theorem based PDA method over MIMO Nakagami- m fading channels," in *Proc. IEEE Global Communications Conference (GLOBECOM'12)*, Anaheim, CA, USA, Dec. 2012, pp. 3588–3593.
- [464] —, "Exact Bayes' theorem based probabilistic data association for iterative MIMO detection and decoding," in *Proc. IEEE Global Communications Conference (GLOBECOM'13)*, Atlanta, GA, USA, Dec. 2013.
- [465] C. Berrou, A. Glavieux, and P. Thitimajshima, "Near Shannon limit error-correcting coding and decoding: Turbo-codes (1)," in *Proc. IEEE International Conference on Communications (ICC'93)*, vol. 2, Geneva, Switzerland, May 1993, pp. 1064–1070.
- [466] C. Berrou and A. Glavieux, "Near optimum error correcting coding and decoding: turbo-codes," *IEEE Transactions on Communications*, vol. 44, no. 10, pp. 1261–1271, Oct. 1996.
- [467] R. Gallager, "Low-density parity-check codes," *IRE Transactions on Information Theory*, vol. 8, no. 1, pp. 21–28, Jan. 1962.
- [468] D. J. C. MacKay and R. M. Neal, "Near Shannon limit performance of low density parity check codes," *Electronics Letters*, vol. 32, no. 18, pp. 1645–1646, 1996.
- [469] L. Vandenberghe and S. Boyd, "Semidefinite programming," *SIAM Review*, vol. 38, no. 1, pp. 49–95, Mar. 1996.
- [470] S. Boyd and L. Vandenberghe, *Convex Optimization*. New York, USA: Cambridge University Press, 2004.
- [471] C. Helmberg, F. Rendl, R. J. Vanderbei, and H. Wolkowicz, "An interior-point method for semidefinite programming," *SIAM Journal on Optimization*, vol. 6, pp. 342–361, 1996.
- [472] P. H. Tan, L. K. Rasmussen, and T. M. Aulin, "The application of semidefinite programming for detection in CDMA," in *Proc. IEEE International Symposium on Information Theory (ISIT'01)*, Washington, DC, Jun. 2001, p. 9.
- [473] W.-K. Ma, T. N. Davidson, K. M. Wong, Z.-Q. Luo, and P.-C. Ching, "Efficient quasi-maximum-likelihood multiuser detection by semi-definite relaxation," in *Proc. IEEE International Conference on Communications (ICC'01)*, Helsinki, Finland, Jun. 2001, pp. 6–10.
- [474] X. Wang, W.-S. Lu, and A. Antoniou, "A near-optimal multiuser detector for CDMA channels using semidefinite programming relaxation," in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS'01)*, Sydney, NSW, Australia, May 2001, pp. 298–301.
- [475] —, "A near-optimal multiuser detector for DS-CDMA systems using semidefinite programming relaxation," *IEEE Transactions on Signal Processing*, vol. 51, no. 9, pp. 2446–2450, Sep. 2003.
- [476] B. Steingrimsson, Z.-Q. Luo, and K. M. Wong, "Soft quasi-maximum-likelihood detection for multiple-antenna wireless channels," *IEEE Transactions on Signal Processing*, vol. 51, no. 11, pp. 2710–2719, Nov. 2003.
- [477] P. F. Driessen and G. J. Foschini, "On the capacity formula for multiple input-multiple output wireless channels: a geometric interpretation," *IEEE Transactions on Communications*, vol. 47, no. 2, pp. 173–176, Feb. 1999.
- [478] D.-S. Shiu, G. J. Foschini, M. J. Gans, and J. M. Kahn, "Fading correlation and its effect on the capacity of multielement antenna systems," *IEEE Transactions on Communications*, vol. 48, no. 3, pp. 502–513, Mar. 2000.
- [479] D. Chizhik, F. Rashid-Farrokh, J. Ling, and A. Lozano, "Effect of antenna separation on the capacity of BLAST in correlated channels," *IEEE Communications Letters*, vol. 4, no. 11, pp. 337–339, Nov. 2000.
- [480] C.-N. Chuah, D. N. C. Tse, J. M. Kahn, and R. A. Valenzuela, "Capacity scaling in MIMO wireless systems under correlated fading," *IEEE Transactions on Information Theory*, vol. 48, no. 3, pp. 637–650, Mar. 2002.
- [481] A. F. Molisch, M. Steinbauer, M. Toeltsch, E. Bonek, and R. S. Thoma, "Capacity of MIMO systems based on measured wireless channels," *IEEE Journal on Selected Areas in Communications*, vol. 20, no. 3, pp. 561–569, Apr. 2002.
- [482] H. Shin and J. H. Lee, "Capacity of multiple-antenna fading channels: spatial fading correlation, double scattering, and keyhole," *IEEE Transactions on Information Theory*, vol. 49, no. 10, pp. 2636–2647, Oct. 2003.
- [483] D. Chizhik, G. J. Foschini, and R. A. Valenzuela, "Capacities of multi-element transmit and receive antennas: correlations and keyholes," *Electronics Letters*, vol. 36, no. 13, pp. 1099–1100, Jun. 2000.
- [484] D. Chizhik, G. J. Foschini, M. J. Gans, and R. A. Valenzuela, "Keyholes, correlations, and capacities of multielement transmit and receive antennas," *IEEE Transactions on Wireless Communications*, vol. 1, no. 2, pp. 361–368, Apr. 2002.

- [485] D. Gesbert, H. Bolcskei, D. Gore, and A. Paulraj, "MIMO wireless channels: capacity and performance prediction," in *Proc. IEEE Global Telecommunications Conference (GLOBECOM'00)*, San Francisco, CA, US, Nov. 2000, pp. 1083–1088.
- [486] P. Almers, F. Tufvesson, and A. F. Molisch, "Measurement of keyhole effect in a wireless multiple-input multiple-output MIMO channel," *IEEE Communications Letters*, vol. 7, no. 8, pp. 373–375, Aug. 2003.
- [487] —, "Keyhole effect in MIMO wireless channels: measurements and theory," *IEEE Transactions on Wireless Communications*, vol. 5, no. 12, pp. 3596–3604, Dec. 2006.
- [488] M. K. Varanasi, "Group detection for synchronous Gaussian code-division multiple-access channels," *IEEE Transactions on Information Theory*, vol. 41, no. 4, pp. 1083–1096, Jul. 1995.
- [489] C. Schlegel, S. Roy, P. D. Alexander, and Z.-J. Xiang, "Multiuser projection receivers," *IEEE Journal on Selected Areas in Communications*, vol. 14, no. 8, pp. 1610–1618, Oct. 1996.
- [490] E. A. Fain and M. K. Varanasi, "Diversity order gain for narrow-band multiuser communications with pre-combining group detection," *IEEE Transactions on Communications*, vol. 48, no. 4, pp. 533–536, Apr. 2000.
- [491] A. Kapur and M. K. Varanasi, "Multiuser detection for overloaded CDMA systems," *IEEE Transactions on Information Theory*, vol. 49, no. 7, pp. 1728–1742, Jul. 2003.
- [492] B. Zarikoff, J. K. Cavers, and S. Bavarian, "An iterative groupwise multiuser detector for overloaded MIMO applications," *IEEE Transactions on Wireless Communications*, vol. 6, no. 2, pp. 443–447, Feb. 2007.
- [493] M. Krause, D. P. Taylor, and P. A. Martin, "List-based group-wise symbol detection for multiple signal communications," *IEEE Transactions on Wireless Communications*, vol. 10, no. 5, pp. 1636–1644, May 2011.
- [494] P. Dayal and M. K. Varanasi, "A fast generalized sphere decoder for optimum decoding of under-determined MIMO systems," in *Proc. 41st Annual Allerton Conference On Communication, Control and Computing (Allerton'03)*, Montecello, IL, US, Oct. 2003, pp. 1216–1225.
- [495] T. Cui and C. Tellambura, "An efficient generalized sphere decoder for rank-deficient MIMO systems," *IEEE Communications Letters*, vol. 9, no. 5, pp. 423–425, May 2005.
- [496] Z. Yang, C. Liu, and J. He, "A new approach for fast generalized sphere decoding in MIMO systems," *IEEE Signal Processing Letters*, vol. 12, no. 1, pp. 41–44, Jan. 2005.
- [497] A. Wolfgang, J. Akhtman, S. Chen, and L. Hanzo, "Iterative MIMO detection for rank-deficient systems," *IEEE Signal Processing Letters*, vol. 13, no. 11, pp. 699–702, Nov. 2006.
- [498] K.-K. Wong, A. Paulraj, and R. D. Murch, "Efficient high-performance decoding for overloaded MIMO antenna systems," *IEEE Transactions on Wireless Communications*, vol. 6, no. 5, pp. 1833–1843, May 2007.
- [499] L. Wang, L. Xu, S. Chen, and L. Hanzo, "Generic iterative search-centre-shifting K-best sphere detection for rank-deficient SDM-OFDM systems," *Electronics Letters*, vol. 44, no. 8, pp. 552–553, 2008.
- [500] Z. Tian, G. Leus, and V. Lottici, "Detection of sparse signals under finite-alphabet constraints," in *Proc. IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP'2009)*, Taipei, Republic of China, Apr. 2009, pp. 2349–2352.
- [501] I. Kanaras, A. Chorti, M. R. D. Rodrigues, and I. Darwazeh, "A fast constrained sphere decoder for ill conditioned communication systems," *IEEE Communications Letters*, vol. 14, no. 11, pp. 999–1001, Nov. 2010.
- [502] T. Cui, T. Ho, and C. Tellambura, "Polynomial moment relaxation for MIMO detection," in *Proc. IEEE International Conference on Communications (ICC'06)*, Istanbul, Turkey, Jun. 2006, pp. 3129–3134.
- [503] M. J. Juntti, T. Schloesser, and J. O. Lilleberg, "Genetic algorithms for multiuser detection in synchronous CDMA," in *Proc. IEEE International Symposium on Information Theory (ISIT'97)*, Ulm, Germany, Jul. 1997, p. 492.
- [504] C. Ergün and K. Hacioglu, "Application of a genetic algorithm to multi-stage detection in CDMA systems," in *Proc. 9th Mediterranean Electrotechnical Conference (MELECON'98)*, Tel-Aviv, Israel, May 1998, pp. 846–850.
- [505] —, "Multiuser detection using a genetic algorithm in CDMA communications systems," *IEEE Transactions on Communications*, vol. 48, no. 8, pp. 1374–1383, Aug. 2000.
- [506] X. Wang, W.-S. Lu, and A. Antoniou, "A genetic-algorithm-based multiuser detector for multiple-access communications," in *Proc. IEEE International Symposium on Circuits and Systems (ISCAS'98)*, Monterey, CA, USA, Jun. 1998, pp. 534–537.
- [507] K. Yen and L. Hanzo, "Genetic algorithm assisted joint multiuser symbol detection and fading channel estimation for synchronous CDMA systems," *IEEE Journal on Selected Areas in Communications*, vol. 19, no. 6, pp. 985–998, Jun. 2001.
- [508] —, "Antenna-diversity-assisted genetic-algorithm-based multiuser detection schemes for synchronous CDMA systems," *IEEE Transactions on Communications*, vol. 51, no. 3, pp. 366–370, Mar. 2003.
- [509] —, "Genetic-algorithm-assisted multiuser detection in asynchronous CDMA communications," *IEEE Transactions on Vehicular Technology*, vol. 53, no. 5, pp. 1413–1422, Sep. 2004.
- [510] G. W. K. Colman and T. J. Willink, "Overloaded array processing using genetic algorithms with soft-biased initialization," *IEEE Transactions on Vehicular Technology*, vol. 57, no. 4, pp. 2123–2131, Jul. 2008.
- [511] M. Dorigo, M. Birattari, and T. Stutzle, "Ant colony optimization," *IEEE Computational Intelligence Magazine*, vol. 1, no. 4, pp. 28–39, Nov 2006.
- [512] J. Sun, W. Xu, and B. Feng, "A global search strategy of quantum-behaved particle swarm optimization," in *Proc. IEEE Conference on Cybernetics and Intelligent Systems (CIS'04)*, vol. 1, Dec. 2004, pp. 111–116.
- [513] S. L. Hijazi and B. Natarajan, "Novel low-complexity DS-SS multiuser detector based on ant colony optimization," in *Proc. IEEE 60th Vehicular Technology Conference (VTC'04-Fall)*, vol. 3, Sep. 2004, pp. 1939–1943.
- [514] C. Xu, B. Hu, L.-L. Yang, and L. Hanzo, "Ant-colony-based multiuser detection for multifunctional-antenna-array-assisted MC DS-SS systems," *IEEE Transactions on Vehicular Technology*, vol. 57, no. 1, pp. 658–663, Jan. 2008.
- [515] C. Xu, R. G. Maunder, L.-L. Yang, and L. Hanzo, "Near-optimum multiuser detectors using soft-output ant-colony-optimization for the DS-SS uplink," *IEEE Signal Processing Letters*, vol. 16, no. 2, pp. 137–140, Feb. 2009.
- [516] J.-K. Lain and J.-Y. Chen, "Near-MLD MIMO detection based on a modified ant colony optimization," *IEEE Communications Letters*, vol. 14, no. 8, pp. 722–724, August 2010.
- [517] K. T. Tasneem, P. A. Martin, and D. P. Taylor, "Iterative soft detection of cochannel signals using ant colony optimization," in *Proc. 23rd IEEE International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC'12)*, Sydney, Australia, Sep. 2012, pp. 1617–1621.
- [518] P. A. Haris, E. Gopinathan, and C. K. Ali, "Artificial bee colony and tabu search enhanced TCM assisted MMSE multi-user detectors for rank deficient SDMA-OFDM system," *Wireless Personal Communications*, vol. 65, no. 2, pp. 425–442, 2012.
- [519] S. Yang, M. Wang, and L. Jiao, "A quantum particle swarm optimization," in *Proc. Congress on Evolutionary Computation (CEC'04)*, vol. 1, Jun. 2004, pp. 320–324.
- [520] Y. Zhao and J. Zheng, "Particle swarm optimization algorithm in signal detection and blind extraction," in *Proc. 7th International Symposium on Parallel Architectures, Algorithms and Networks (ISPAN'04)*, Hong Kong, China, May 2004, pp. 37–41.
- [521] S. Chen, W. Yao, H. R. Palally, and L. Hanzo, "Particle swarm optimisation aided MIMO transceiver designs," in *Computational Intelligence in Expensive Optimization Problems*, ser. Adaptation Learning and Optimization, Y. Tenne and C.-K. Goh, Eds. Springer Berlin Heidelberg, 2010, vol. 2, pp. 487–511.
- [522] T. Abrão, L. D. de Oliveira, F. Ciriaco, B. A. Angélico, P. E. Jeszensky, and F. J. Casadevall Palacio, "S/MIMO MC-SS heuristic multiuser detectors based on single-objective optimization," *Wireless Personal Communications*, vol. 53, no. 4, pp. 529–553, 2010.
- [523] J. Xia, T. Lv, X. Yun, X. Su, and S. Yang, "Simulated annealing based multiuser detection for synchronous SSMA system," in *Proc. 11th IEEE Singapore International Conference on Communication Systems (ICCS'08)*, Nov. 2008, pp. 441–445.
- [524] T. Datta, N. Srinidhi, A. Chockalingam, and B. S. Rajan, "Low-complexity near-optimal signal detection in underdetermined large-MIMO systems," in *Proc. National Conference on Communications (NCC'12)*, Kharagpur, India, Feb. 2012, pp. 1–5.
- [525] J. Lodge, R. Young, P. A. Hoeher, and J. Hagenauer, "Separable MAP 'filters' for the decoding of product and concatenated codes," in *Proc. IEEE International Conference on Communications (ICC'93)*, vol. 3, Geneva, Switzerland, May 1993, pp. 1740–1745.
- [526] J. Hagenauer, "The Turbo principle: tutorial introduction and state of the art," in *Proc. 1st International Symposium on Turbo Codes and Related Topics*, Brest, France, Sep. 1997, pp. 1–11.

- [527] J. Hagenauer, E. Offer, and L. Papke, "Iterative decoding of binary block and convolutional codes," *IEEE Transactions on Information Theory*, vol. 42, no. 2, pp. 429–445, Mar. 1996.
- [528] M. Moher, "Turbo-based multiuser detection," in *Proc. IEEE International Symposium on Information Theory (ISIT'97)*, Ulm, Germany, Jun. 1997, p. 195.
- [529] —, "An iterative multiuser decoder for near-capacity communications," *IEEE Transactions on Communications*, vol. 46, no. 7, pp. 870–880, Jul. 1998.
- [530] M. C. Reed, P. D. Alexander, J. A. Asenstorfer, and C. B. Schlegel, "Near single user performance using iterative multi-user detection for CDMA with turbo-code decoders," in *Proc. 8th IEEE Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC'97)*, vol. 2, Helsinki, Finland, Sep. 1997, pp. 740–744.
- [531] M. C. Reed, C. B. Schlegel, P. D. Alexander, and J. A. Asenstorfer, "Iterative multiuser detection for CDMA with FEC: Near-single-user performance," *IEEE Transactions on Communications*, vol. 46, no. 12, pp. 1693–1699, 1998.
- [532] F. Tarköy, "Iterative multi-user decoding for asynchronous users," in *Proc. IEEE International Symposium on Information Theory (ISIT'97)*, Ulm, Germany, Jun. 1997, p. 30.
- [533] L. Nelson and H. V. Poor, "Iterative multiuser receivers for CDMA channels: an EM-based approach," *IEEE Transactions on Communications*, vol. 44, no. 12, pp. 1700–1710, Dec. 1996.
- [534] X. Wang and H. V. Poor, "Iterative (turbo) soft interference cancellation and decoding for coded CDMA," *IEEE Transactions on Communications*, vol. 47, no. 7, pp. 1046–1061, Jul. 1999.
- [535] H. El Gamal and E. Geraniotis, "Iterative multiuser detection for coded CDMA signals in awgn and fading channels," *IEEE Journal on Selected Areas in Communications*, vol. 18, no. 1, pp. 30–41, Jan. 2000.
- [536] H. Lee, B. Lee, and I. Lee, "Iterative detection and decoding with an improved V-BLAST for MIMO-OFDM systems," *IEEE Journal on Selected Areas in Communications*, vol. 24, no. 3, pp. 504–513, Mar. 2006.
- [537] Y. De Jong and T. Willink, "Iterative tree search detection for MIMO wireless systems," *IEEE Transactions on Communications*, vol. 53, no. 6, pp. 930–935, Jun. 2005.
- [538] M. Nekui, M. Kisialiou, T. Davidson, and Z.-Q. Luo, "Efficient soft-output demodulation of MIMO QPSK via semidefinite relaxation," *IEEE Journal of Selected Topics in Signal Processing*, vol. 5, no. 8, pp. 1426–1437, Dec. 2011.
- [539] V. Pauli, L. Lampe, and R. Schober, "Turbo DPSK using soft multiple-symbol differential sphere decoding," *IEEE Transactions on Information Theory*, vol. 52, no. 4, pp. 1385–1398, Apr. 2006.
- [540] S. ten Brink, "Convergence behavior of iteratively decoded parallel concatenated codes," *IEEE Transactions on Communications*, vol. 49, no. 10, pp. 1727–1737, Oct. 2001.
- [541] J. Hagenauer, "The EXIT chart—Introduction to extrinsic information transfer in iterative processing," in *Proc. 12th European Signal Processing Conference (EUSIPCO'04)*, Vienna, Austria, Sep. 2004, pp. 1541–1548.
- [542] S. L. Ariyavisitakul, "Turbo space-time processing to improve wireless channel capacity," *IEEE Transactions on Communications*, vol. 48, no. 8, pp. 1347–1359, Aug. 2000.
- [543] S. Baro, J. Hagenauer, and M. Witzke, "Iterative detection of MIMO transmission using a list-sequential (LISS) detector," in *Proc. IEEE International Conference on Communications (ICC'03)*, Anchorage, Alaska, US, May 2003, pp. 2653–2657.
- [544] S. Haykin, M. Sellathurai, Y. De Jong, and T. Willink, "Turbo-MIMO for wireless communications," *IEEE Communications Magazine*, vol. 42, no. 10, pp. 48–53, Oct. 2004.
- [545] J. Hagenauer and C. Kuhn, "The list-sequential (LISS) algorithm and its application," *IEEE Transactions on Communications*, vol. 55, no. 5, pp. 918–928, May 2007.
- [546] C. B. Peel, B. M. Hochwald, and A. L. Swindlehurst, "A vector-perturbation technique for near-capacity multiantenna multiuser communication – part I: channel inversion and regularization," *IEEE Transactions on Communications*, vol. 53, no. 1, pp. 195–202, Jan. 2005.
- [547] B. M. Hochwald, C. B. Peel, and A. L. Swindlehurst, "A vector-perturbation technique for near-capacity multiantenna multiuser communication – part II: perturbation," *IEEE Transactions on Communications*, vol. 53, no. 3, pp. 537–544, Mar. 2005.
- [548] O. Alamri, J. Wang, S. X. Ng, L.-L. Yang, and L. Hanzo, "Near-capacity three-stage turbo detection of irregular convolutional coded joint sphere-packing modulation and space-time coding," *IEEE Transactions on Communications*, vol. 57, no. 5, pp. 1486–1495, May 2009.
- [549] L. Hanzo, M. El-Hajjar, and O. Alamri, "Near-capacity wireless transceivers and cooperative communications in the MIMO era: Evolution of standards, waveform design, and future perspectives," *Proceedings of the IEEE*, vol. 99, no. 8, pp. 1343–1385, Aug. 2011.
- [550] S. Sugiura, S. Chen, and L. Hanzo, "MIMO-aided near-capacity turbo transceivers: Taxonomy and performance versus complexity," *IEEE Communications Surveys & Tutorials*, vol. 14, no. 2, pp. 421–442, Second Quarter 2012.
- [551] P. Suthisopapan, K. Kasai, V. Imtawil, and A. Meesomboon, "Approaching capacity of large MIMO systems by non-binary LDPC codes and MMSE detection," in *Proc. IEEE International Symposium on Information Theory (ISIT'12)*, Cambridge, MA, Jul. 2012, pp. 1712–1716.
- [552] L. Hanzo, O. Alamri, M. El-Hajjar, and N. Wu, *Near-Capacity Multi-Functional MIMO Systems: Sphere-Packing, Iterative Detection and Cooperation*. John Wiley & Sons, 2009.
- [553] L. Hanzo, T. H. Liew, B. L. Yeap, R. Y. S. Tee, and S. X. Ng, *Turbo Coding, Turbo Equalisation and Space-Time Coding: EXIT-Chart-Aided Near-Capacity Designs for Wireless Channels*. John Wiley & Sons, 2011.
- [554] L. Hanzo, R. G. Maunder, J. Wang, and L.-L. Yang, *Near-capacity variable-length coding: regular and EXIT-chart-aided irregular designs*. John Wiley & Sons, 2011.
- [555] H. Wymeersch, *Iterative receiver design*. Cambridge University Press, 2007.
- [556] H. Sampath, P. Stoica, and A. Paulraj, "Generalized linear precoder and decoder design for MIMO channels using the weighted MMSE criterion," *IEEE Transactions on Communications*, vol. 49, no. 12, pp. 2198–2206, Dec. 2001.
- [557] D. P. Palomar, J. M. Cioffi, and M.-A. Lagunas, "Joint Tx-Rx beamforming design for multicarrier MIMO channels: a unified framework for convex optimization," *IEEE Transactions on Signal Processing*, vol. 51, no. 9, pp. 2381–2401, Sep. 2003.
- [558] D. J. Love and R. W. Heath, "Limited feedback unitary precoding for spatial multiplexing systems," *IEEE Transactions on Information Theory*, vol. 51, no. 8, pp. 2967–2976, Aug. 2005.
- [559] A. Wiesel, Y. C. Eldar, and S. Shamai, "Linear precoding via conic optimization for fixed MIMO receivers," *IEEE Transactions on Signal Processing*, vol. 54, no. 1, pp. 161–176, Jan. 2006.
- [560] M. Sadek, A. Tarighat, and A. H. Sayed, "A leakage-based precoding scheme for downlink multi-user MIMO channels," *IEEE Transactions on Wireless Communications*, vol. 6, no. 5, pp. 1711–1721, May 2007.
- [561] M. Vu and A. Paulraj, "Mimo wireless linear precoding," *IEEE Signal Processing Magazine*, vol. 24, no. 5, pp. 86–105, Sep. 2007.
- [562] J. Zhang, R. Chen, J. G. Andrews, A. Ghosh, and R. W. Heath, "Networked MIMO with clustered linear precoding," *IEEE Transactions on Wireless Communications*, vol. 8, no. 4, pp. 1910–1921, Apr. 2009.
- [563] T. L. Marzetta, "Noncooperative cellular wireless with unlimited numbers of base station antennas," *IEEE Transactions on Wireless Communications*, vol. 9, no. 11, pp. 3590–3600, Nov. 2010.
- [564] A. Hu, T. Lv, H. Gao, Z. Zhang, and S. Yang, "An ESPRIT-based approach for 2-D localization of incoherently distributed sources in massive MIMO systems," *IEEE Journal of Selected Topics in Signal Processing*, vol. 8, no. 5, pp. 996–1011, Oct. 2014.
- [565] J. Zhang, B. Zhang, S. Chen, X. Mu, M. El-Hajjar, and L. Hanzo, "Pilot contamination elimination for large-scale multiple-antenna aided OFDM systems," *IEEE Journal of Selected Topics in Signal Processing*, vol. 8, no. 5, pp. 759 – 772, Oct. 2014.
- [566] H. Elgala, R. Mesleh, and H. Haas, "Indoor optical wireless communication: potential and state-of-the-art," *IEEE Communications Magazine*, vol. 49, no. 9, pp. 56–62, Sep. 2011.
- [567] L. Hanzo, H. Haas, S. Imre, D. O'Brien, M. Rupp, and L. Gyongyosi, "Wireless myths, realities, and futures: from 3G/4G to optical and quantum wireless," *Proceedings of the IEEE*, vol. 100, no. Special Centennial Issue, pp. 1853–1888, May 2012.
- [568] J. Hoydis, K. Hosseini, S. ten Brink, and M. Debbah, "Making smart use of excess antennas: massive MIMO, small cells, and TDD," *Bell Labs Technical Journal*, vol. 18, no. 2, pp. 5–21, Sep. 2013.
- [569] K. Zheng, S. Ou, and X. Yin, "Massive MIMO channel models: A survey," *International Journal of Antennas and Propagation*, vol. 2014, pp. 1 – 10, Jun. 2014.
- [570] A. M. Tulino and S. Verdú, "Random matrix theory and wireless communications," *Foundations and Trends® in Communications and Information Theory*, vol. 1, no. 1, pp. 1–182, 2004. [Online]. Available: <http://dx.doi.org/10.1561/0100000001>
- [571] M. L. Mehta, *Random Matrices*, 3rd ed., ser. Pure and Applied Mathematics. Elsevier Science, 2004.

- [572] V. A. Marčenko and L. A. Pastur, "Distribution of eigenvalues for some sets of random matrices," *Math USSR Shornik*, vol. 1, no. 4, pp. 457–483, 1967.
- [573] A. Chockalingam and B. S. Rajan, *Large MIMO Systems*, ser. Large MIMO Systems. Cambridge University Press, 2014.
- [574] T. L. Marzetta, "How much training is required for multiuser MIMO?" in *Proc. 40th Asilomar Conference on Signals, Systems and Computers (ACSSC'06)*, Pacific Grove, CA, Oct. 2006, pp. 359–363.
- [575] Y. Sun, "Eliminating-highest-error and fastest-metric-descent criteria and iterative algorithms for bit-synchronous CDMA multiuser detection," in *Proc. IEEE International Conference on Communications (ICC'98)*, vol. 3, Atlanta, GA, Jun. 1998, pp. 1576–1580.
- [576] —, "A family of linear complexity likelihood ascent search detectors for CDMA multiuser detection," in *Proc. IEEE 6th International Symposium on Spread Spectrum Techniques and Applications*, vol. 2, Parsippany, NJ, Sep. 2000, pp. 713–717.
- [577] —, "A family of likelihood ascent search multiuser detectors: approaching optimum performance via random multicode with linear complexity," *IEEE Transactions on Communications*, vol. 57, no. 8, pp. 2215–2220, Aug. 2009.
- [578] —, "Hopfield neural network based algorithms for image restoration and reconstruction – part I: Algorithms and simulations," *IEEE Transactions on Signal Processing*, vol. 48, no. 7, pp. 2105–2118, Jul. 2000.
- [579] —, "Hopfield neural network based algorithms for image restoration and reconstruction – part II: Performance analysis," *IEEE Transactions on Signal Processing*, vol. 48, no. 7, pp. 2119–2131, Jul. 2000.
- [580] B.-P. Paris, G. Orsak, M. K. Varanasi, and B. Aazhang, "Neural net receivers in multiple access-communications," in *IEEE Conference on Neural Information Processing Systems (NIPS'88)*, Denver, CO., Nov. 1988, pp. 272–280.
- [581] B. Aazhang, B.-P. Paris, and G. C. Orsak, "Neural networks for multiuser detection in code-division multiple-access communications," *IEEE Transactions on Communications*, vol. 40, no. 7, pp. 1212–1222, Jul. 1992.
- [582] U. Mitra and H. V. Poor, "Adaptive receiver algorithms for near-far resistant CDMA," in *Proc. 3rd IEEE International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC'92)*, Boston, MA, Oct. 1992, pp. 639–644.
- [583] —, "Neural network techniques for adaptive multiuser demodulation," *IEEE Journal on Selected Areas in Communications*, vol. 12, no. 9, pp. 1460–1470, Dec. 1994.
- [584] —, "Adaptive receiver algorithms for near-far resistant CDMA," *IEEE Transactions on Communications*, vol. 43, no. 2/3/4, pp. 1713–1724, Feb./Mar./Apr. 1995.
- [585] G. Kechriotis and E. S. Manolakos, "Hopfield neural network implementation of the optimal CDMA multiuser detector," *IEEE Transactions on Neural Networks*, vol. 7, no. 1, pp. 131–141, Jan. 1996.
- [586] P. Li and R. D. Murch, "Multiple output selection-LAS algorithm in large MIMO systems," *IEEE Communications Letters*, vol. 14, no. 5, pp. 399–401, May 2010.
- [587] E. Fishler, A. Haimovich, R. S. Blum, D. Chizhik, L. J. Cimini, and R. A. Valenzuela, "MIMO radar: an idea whose time has come," in *Proceedings of the IEEE Radar Conference*, Philadelphia, Pennsylvania, USA, Apr. 2004, pp. 71–78.
- [588] E. Fishler, A. Haimovich, R. S. Blum, L. J. Cimini, D. Chizhik, and R. A. Valenzuela, "Spatial diversity in radars-models and detection performance," *IEEE Transactions on Signal Processing*, vol. 54, no. 3, pp. 823–838, Mar. 2006.
- [589] J. Li and P. Stoica, "MIMO radar with colocated antennas," *IEEE Signal Processing Magazine*, vol. 24, no. 5, pp. 106–114, Sep. 2007.
- [590] A. M. Haimovich, R. S. Blum, and L. J. Cimini, "MIMO radar with widely separated antennas," *IEEE Signal Processing Magazine*, vol. 25, no. 1, pp. 116–129, Jan. 2008.
- [591] J. Li and P. Stoica, Eds., *MIMO radar signal processing*. John Wiley & Sons, 2009.
- [592] A. De Maio and M. Lops, "Design principles of MIMO radar detectors," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 43, no. 3, pp. 886–898, Jul. 2007.
- [593] J. Li, P. Stoica, and X. Zheng, "Signal synthesis and receiver design for MIMO radar imaging," *IEEE Transactions on Signal Processing*, vol. 56, no. 8, pp. 3959–3968, Aug. 2008.
- [594] A. R. Shah, R. C. J. Hsu, A. Tarighat, A. H. Sayed, and B. Jalali, "Coherent optical MIMO (COMIMO)," *Journal of Lightwave Technology*, vol. 23, no. 8, pp. 2410–2419, Aug. 2005.
- [595] A. Tarighat, R. C. J. Hsu, A. Shah, A. H. Sayed, and B. Jalali, "Fundamentals and challenges of optical multiple-input multiple-output multimode fiber links," *IEEE Communications Magazine*, vol. 45, no. 5, pp. 57–63, May 2007.
- [596] S. Randel, R. Ryf, A. Sierra, P. J. Winzer, A. H. Gnauck, C. A. Bolle, R.-J. Essiambre, D. W. Peckham, A. McCurdy, R. Lingle *et al.*, "6×56-gb/s mode-division multiplexed transmission over 33-km few-mode fiber enabled by 6×6 MIMO equalization," *Optics Express*, vol. 19, no. 17, pp. 16 697–16 707, Aug. 2011.
- [597] R. Ryf, S. Randel, A. H. Gnauck, C. Bolle, R.-J. Essiambre, P. J. Winzer, D. W. Peckham, A. McCurdy, and R. Lingle, "Space-division multiplexing over 10 km of three-mode fiber using coherent 6×6 MIMO processing," in *Proceedings of Optical Fiber Communication Conference / National Fiber Optic Engineers Conference*, Los Angeles, California, USA, Mar. 2011, p. PDPB10.
- [598] R. Ryf, S. Randel, A. H. Gnauck, C. Bolle, A. Sierra, S. Mumtaz, M. Esmacelpour, E. C. Burrows, R.-J. Essiambre, P. J. Winzer *et al.*, "Mode-division multiplexing over 96 km of few-mode fiber using coherent 6×6 MIMO processing," *Journal of Lightwave Technology*, vol. 30, no. 4, pp. 521–531, Feb. 2012.
- [599] R. Essiambre and R. W. Tkach, "Capacity trends and limits of optical communication networks," *Proceedings of the IEEE*, vol. 100, no. 5, pp. 1035–1055, May 2012.
- [600] S. Arik, J. M. Kahn, and K.-P. Ho, "MIMO signal processing for mode-division multiplexing: An overview of channel models and signal processing architectures," *IEEE Signal Processing Magazine*, vol. 31, no. 2, pp. 25–34, Mar. 2014.



Shaoshi Yang (SIEEE'09-MIEEE'13) received his B.Eng. degree in Information Engineering from Beijing University of Posts and Telecommunications (BUPT), Beijing, China in Jul. 2006, his first Ph.D. degree in Electronics and Electrical Engineering from University of Southampton, U.K. in Dec. 2013, and his second Ph.D. degree in Signal and Information Processing from BUPT in Mar. 2014. He is now working as the IU-ATC Senior Research Fellow in University of Southampton, U.K. From November 2008 to February 2009, he was an Intern Research

Fellow with the Communications Technology Lab (CTL), Intel Labs, Beijing, China, where he focused on Channel Quality Indicator Channel (CQICH) design for mobile WiMAX (802.16m) standard. His research interests include MIMO signal processing, green radio, heterogeneous networks, cross-layer interference management, convex optimization and its applications. He has published in excess of 30 research papers on IEEE journals and conferences.

Shaoshi has received a number of academic and research awards, including the PMC-Sierra Telecommunications Technology Scholarship at BUPT, the Electronics and Computer Science (ECS) Scholarship of University of Southampton and the Best PhD Thesis Award of BUPT. He is a member of IEEE/IET, and a junior member of Isaac Newton Institute for Mathematical Sciences, Cambridge University, U.K. He also serves as a TPC member of several major IEEE journals/conferences, including *IEEE ICC*, *PIMRC*, *ICCVE*, *HPCC* and *IEEE Journal on Selected Areas in Communications*. (<https://sites.google.com/site/shaoshiyang/>)



Lajos Hanzo (FREng, FIEEE'04, FIET, FEURASIP, DSc) received his degree in electronics in 1976 and his doctorate in 1983. In 2009 he was awarded the honorary doctorate "Doctor Honoris Causa" by the Technical University of Budapest. During his 37-year career in telecommunications he has held various research and academic posts in Hungary, Germany and the UK. Since 1986 he has been with the School of Electronics and Computer Science, University of Southampton, UK, where he holds the chair in telecommunications. He has successfully

supervised 80+ PhD students, co-authored 20 John Wiley/IEEE Press books on mobile radio communications totalling in excess of 10 000 pages, published 1400+ research entries at IEEE Xplore, acted both as TPC and General Chair of IEEE conferences, presented keynote lectures and has been awarded a number of distinctions. Currently he is directing a 100-strong academic research team, working on a range of research projects in the field of wireless multimedia communications sponsored by industry, the Engineering and Physical Sciences Research Council (EPSRC) UK, the European Research Council's Advanced Fellow Grant and the Royal Society's Wolfson Research Merit Award. He is an enthusiastic supporter of industrial and academic liaison and he offers a range of industrial courses. He is also a Governor of the IEEE VTS. During 2008 - 2012 he was the Editor-in-Chief of the IEEE Press and a Chaired Professor also at Tsinghua University, Beijing. Lajos has 20 000+ citations. For further information on research in progress and associated publications please refer to <http://www-mobile.ecs.soton.ac.uk>