

Report Writing with Lyx

Dr. H. Ramachandran
EE Dept
IIT Madras

January 7, 2008

Abstract

In this lab session, you will learn about the technical wordprocessor, LyX. You will use LyX to create a simple report.

Contents

1	Introduction	2
1.1	WYSIWYG versus Typesetting Languages	2
2	Starting LyX	3
3	Document Settings	4
4	Adding the Title, Author, Date and Abstract	4
5	Adding an Introductory, Theory Section	5
5.1	Handling Mathematical Equations	5
5.2	Enumerated Text	7
5.3	Typing in the Introduction	8
6	Entering the Experimental Details	8
6.1	Adding a Table	8
6.2	Adding Figures	8
6.3	Typing in the Results and Discussion Section	10
7	Creating the output	10

8	Material for the Assignment	10
8.1	Abstract	10
8.2	Introduction	10
8.3	Results and Discussion	11

1 Introduction

One of the commonest tasks any student faces, and indeed any engineer faces, is that of writing a clear, concise and complete report. This week, we introduce a tool that makes technical report writing easy. Not only easy, but extremely elegant and professional in appearance.

The tool in question is called \TeX . \TeX was invented by the famous Stanford mathematician, Donald Knuth, to make mathematical typesetting simpler. He studied the arcane intricacies of professional typesetting and discovered the rules that govern the spacing, size and arrangement of characters on a page that produce the appearance we find in textbooks and other professionally produced manuscripts. And he put all these rules into a program, gave it a programming interface and released it to the scientific and engineering community.

It is not easy to use \TeX . To create a document, you actually have to write a program. The program describes the logical structure of your report. When compiled, the result is a professional looking layout of the report. Clearly not everyone is competent enough to create complex reports using \TeX . So a set of routines (or macros) were developed and called \LaTeX . Using these macros, writing reports became very easy, and indeed a generation of scientists and engineers have used \LaTeX to write their papers. Most scientific and engineering journals accept \LaTeX documents and publish “templates” (basically more *macros*) that put the articles in the format they require.

But even \LaTeX requires that you write a program. A simpler program, true, but still a program. You do not get to see what you have created till you compile the program using the “*latex*” command. In this day of WYSIWYG, that is very challenging for most users. So, a set of visual editors have developed, that look like Microsoft Word or Wordperfect, but which save the file as \LaTeX documents. The advantage of this approach is that you get the ease of use that a visual editor provides, while retaining the unmatched quality that \LaTeX offers. LyX is one such visual editor. In this week’s session, we will learn to use LyX and will learn to create a simple report.

All reports in this course must be submitted as LyX documents.

Note: This document itself (and all other lab manuals for this course) have also been written in LyX.

1.1 WYSIWYG versus Typesetting Languages

What differentiates a visual editor such as *Microsoft Word* from LyX?

When we create a document in *Word*, we specify everything about the document. Essentially, the editor provides us with a blank page, and some tools with which to write on that page. All

editorial control is with us. We can use whatever font we wish, in whatever colour and make it underlined, bold and italics at the same time. This is similar to the power that *assembly language* programming gives us.

When we create a document in LyX however, we specify relatively little about the layout. We just type. The font selection and style is mostly determined by the environment we choose. A section heading has a font that goes with it. It has a style as well.

The advantage of the WYSIWYG approach is that one can create arbitrary documents. We can put the table of contents in the middle of page 3, with page numbers on the left.

The advantage of the LyX approach is that we make very few typesetting decisions, and all our decisions are related to our own material. Thus, document creation can be extremely fast.

2 Starting LyX

LyX can be launched from the command line by executing the command:

```
$ lyx [filename] &
```

The “\$” is the shell prompt (it depends on your choice of shell prompt, and may look different for each person). “lyx” is the command name. “[filename]” is the (optional) filename. If no filename is given, LyX starts with an empty window. The “&” is a directive to the shell that the program should be started as a child process and control should return to the shell. This permits you to enter further commands in that console session.

For the purpose of the next few paragraphs, start LyX as

```
$ lyx report1.lyx &
```

This starts LyX with an empty file called *report1.lyx*. We shall put things into this report as we go along.

The LyX window is very similar to that of other GUI wordprocessors. There is a set of drop-down menu buttons. Below that is a list of icons that offer a quick way to perform common actions. Below that is the text window itself. At the bottom is the status line which gives information about the LyX editing session.

However, the LyX window is quite different from your standard wordprocessor too:

- There is no font selection menu.
- There is no point size selection menu.
- There is no ruler.
- There are no tab stops.

Instead there is an all important “environment” menu, just below the *File* menu button. Click on the down arrow beside that menu. You will see a large number of “environments” to choose from.

The reason for the absence of the font and size menus is that there are clear rules about which font and which size to use where. The environment pretty much dictates the choice of font and size. The “ruler” and “tab stops” are made obsolete by the presence of environments.

3 Document Settings

First we set up the report as a report. Click on *Layout*→*Document*. This opens up a form with many complicated settings.

- The most important of these is the “Class” field. Click on the ↓ arrow and select the “article” class (this is actually the default class so you didn’t need to do anything). The “Class” setting sets all the major features of the document. It selects which macros are predefined, and largely determines the layout of your document.
- Click on “Font Size” and select “12”. By default the font size is “10”, which is too small for reports. “10” point font is used in books, and is the standard for the publishing industry. For reports, “12” point is much more readable.
- Click on “One” in the “Page cols” menu. We have some wide tables, and wish to use single column format. Normally, more than two columns is never used. To have more than two columns, and to adjust these columns dynamically, you need some advanced commands (look up the *multicol* style in the *L^AT_EX* book).
- Click on the “Paper” tab at the top of the form. Select “A4” for the paper size.
- Also click on “Very small margins” under “Special (A4 portrait only)”. This makes better use of the page and does not waste paper.
- Select “OK” to close the *Document* form.

The “article” class is used in most scientific and engineering communications. For example, articles submitted to scientific journals use the “article” style. In this style, different sections start on the same page. This is unlike the “book” style, for example, where different chapters start on fresh pages. The article style, in fact, does not have chapters. It starts with sections, sub-sections, etc.

4 Adding the Title, Author, Date and Abstract

The first thing to do when creating a report is to put a title, add your name as author and add an abstract of what the report is about. A date is added automatically. Go to the “environment”

drop-down menu and select title (alternatively, press *Alt-p t*, i.e., press the *Alt* and *p* keys simultaneously, release, and press the *t* key). Type in a title for the lab - put in the week corresponding to this assignment, and the subject. Press the *Enter* key. The *Enter* key separates paragraphs, just as it does in *Word*. Any environment that consists of a single paragraph is terminated by this key. So, when you press the *Enter* key, LyX takes you out of the *Title* environment and puts you in the default *Standard* environment.

Now select the “Author” environment (*Alt-p Shift-A*). Enter your name, roll number and department. To put these one under the other, use *Ctrl-Enter*. *Enter* would take you out of the “Author” environment. *Ctrl-Enter* inserts a line break while keeping you in the same environment. Press *Enter* when done.

Finally, select the “Abstract” environment (*Alt-p a*). Type in the text on page 10.

5 Adding an Introductory, Theory Section

Start a section (*Alt-p 2*), and name it “Introduction”. Under it enter the text on page 10.

5.1 Handling Mathematical Equations

LaTeX is at its best when handling mathematical equations. Using LyX, you can get those perfect equations with relatively little effort. There are two ways of entering equations. The first is to use the menus. The “math” submenu in the “insert” menu contains everything you need. The only problem is that it is clumsy, and only suitable for very beginning users. Far better is to use the keyboard. The *Alt-m* key sequence gives you pretty much everything you need to create equations. Let us try to create the following equation:

$$\frac{\partial A}{\partial z} + v_G \frac{\partial A}{\partial t} + iD \frac{\partial^2 A}{\partial t^2} = \gamma |A|^2 A \quad (1)$$

1. First enter the “Descriptive Math Mode” by pressing *Alt-m d* which starts an equation on a separate line.
2. The terms on the left side involve fractions. A fraction is entered by typing *Alt-m f* (“f” for fraction). To enter the ∂ symbol, type *Alt-m p* (“p” for partial). So type

Alt-m d Alt-m f Alt-m p A <down arrow> Alt-m p z <space>

The *<down arrow>* takes you to the denominator field, while the *<space>* leaves the fraction and allows you to enter the next term.

3. The second term involves a subscript. This is done by typing “_”. So the second term is entered as:

+ v_G Alt-m f Alt-m p A <down arrow> Alt-m p t <space>

The “v_G” entry creates v_G .

4. The third term involves superscripts. This is done by typing “^”. So the third term is entered as follows:

+ iD Alt-m f Alt-m p^2 A <down arrow> Alt-m p t^2 <space>

Notice the “Alt-m p^2” and the “t^2” entries. These create the second derivatives.

5. The term on the right involves a Greek letter and vertical bars. These are entered as follows:

= Alt-m g g /A/^2 A

Here the “Alt-m g” sequence selects the Greek keyboard, where “abcde...” become “αβχδε...”. The vertical bar is just directly typed in as seen above.

6. Finally, we want to give the equation a number. By default, LyX does not number equations. If you want to add a number to an equation, just put the cursor into the equation and type *Alt-m n*. The equation number is automatically generated, and is guaranteed to be in proper sequence, with proper respect paid to style. If you want to remove an equation number, just type *Alt-m Shift-n*.

However, the only real reason to number an equation such as Eq. (1) is to refer to it in the text. In that case, we can’t just add a number, we have to give that number a meaningful label. This is done by placing the cursor in the equation, and typing *Alt-i l*, which opens up a dialog box where you can give the name of the label, say “eq:maineq” (by default, LyX will put “eq:” as part of an equation label to keep it from being confused with a section label or a figure label or any other label). Once you have done that, you can refer to that equation elsewhere by typing

Eq. *Alt-i r* and selecting “eq:maineq”

That is pretty much it. There is much more you can do, like creating matrices, integral signs etc. But the essence of the math mode in LyX is what we just did. But look at the result (type *Alt-x p*) and see the quality of the typesetting that we have painlessly obtained. The *Alt-m* keyboard is summarized below for quick reference:

LyX	Description	L ^A T _E X	LyX	Description	L ^A T _E X
<i>Alt-m f</i>	fraction	<code>\frac</code>	<i>Alt-m s</i>	square root	<code>\sqrt</code>
<i>Alt-m u</i>	∑ symbol	<code>\sum</code>	<i>Alt-m i</i>	∫ symbol	<code>\int</code>
<i>Alt-m d</i>	start eqn on fresh line		<i>Alt-m m</i>	start eqn inline	
<i>Alt-m p</i>	∂ symbol	<code>\partial</code>	<i>Alt-m r</i>	√ symbol	<code>\root</code>
<i>Alt-m n</i>	add eqn number		<i>Alt-m S-n</i>	remove eqn number	
<i>Alt-m 8</i>	∞ symbol	<code>\infty</code>	<i>Alt-m g</i>	Greek keyboard	<code>\alpha</code> etc

5.2 Enumerated Text

Very often in reports, we have to present information as a list. For example, in the text given in the next section, the four algorithms are described in an enumerated list. The way to do this is to use the “enumerate” environment, or *Alt-p e*. This puts a number in front of every paragraph. Often, we require a sub-list within a list (again see the example text below). To increase the “depth” of the enumeration, click on the “increase environmental depth” icon. This will create a sub-list, enumerated by (a), (b), etc.

It will not be required in this assignment, but we sometimes need to continue text in a second paragraph within a single enumeration. For an example, see item 6 of section 5.1. When we press <Enter> to start the next paragraph, a new number gets added, as in the below example:

First attempt:

1. A sample line. Ended by pressing <Enter>
2. The next para corresponds to item 2.
3. This para corresponds to item 3.

To prevent this happening, click on the “increase environmental dept” icon. This will still put a number, but it will look like (a):

Second attempt

1. A sample line. Ended by pressing <Enter>
(a) The next para corresponds to item 1(a).
2. This para corresponds to item 2.

Now, change the sub-environment to “standard” (*Alt-p s*). Type in the line. When you now press <Enter>, you go back to the outer nesting level, but without enumeration:

Third attempt:

1. A sample line. Ended by pressing <Enter>
The next para corresponds to text under item 1.

This para is in standard text.

To get it all right, type *Alt-p e* once again in the next paragraph:

Final attempt:

1. A sample line. Ended by pressing <Enter>
The next para corresponds to text under item 1.
2. This para is item 2.

With a little practice, lists and enumerations are extremely convenient and easy to do under LyX.

5.3 Typing in the Introduction

Type in the text on page 10 following the above guidelines.

6 Entering the Experimental Details

Select the “section” environment (*Alt-p 2*) and give a heading. Press *Enter*. Now add text below to describe the simulation runs.

Further sections can be added as needed. To add a new section at any point, just press *Enter* (this is the universal means of starting a new environment), and select the “section” environment (*Alt-p 2*). Numbering is automatically adjusted to keep the sections numbered appropriately. To add a subsection, such as the one below for adding a table, select the “subsection” environment.

6.1 Adding a Table

The main thing that the report has is a table containing the measurements. Insert a table via *Insert→float→table*. The effect of this command is to insert a place for a table to be added. Add a caption by typing in the space after “Table #:”. Press *Enter*. Now insert the table itself by clicking on the table icon, or via *insert→tabular material*. Type in the data from Table 1.

To enter the numbers, go into Math mode (*Alt-m m*) and then type in the numbers. The \times symbol is obtained by typing “\times”, or selecting it from the “math panel”.

You will notice that the inserted table is “left aligned” rather than centered. To correct this, you have to change the alignment. Do this by placing the cursor just outside the table and selecting *Layout→paragraph*, and then clicking on “centered” in the paragraph form. By default, LyX works in “block” mode, which creates justified text. For objects such as tables and figures, this usually needs to change to “centered”, which is what we did above.

A peculiarity of the “floating” table is that LyX decides where to place it. LyX, or rather T_EX, has a very sophisticated set of algorithms that decides hyphenation, line- and page-breaking and float placement. By and large, you should not tinker with these algorithms. In almost every situation, Knuth’s default arrangement is superior to our taste. We are not professional typesetters, and our tinkering rarely produces an improved document. There *are* ways to force our preferences on LyX, but these are to be used with care.


6.2 Adding Figures

The table is also plotted, as shown in Fig. 1. To create a figure, you must have a graphic file. Download *fig1.ps* from the site. Insert a floating figure using *Insert→float→figure*. Insert a label in the caption using *Insert→label*. Type in a caption. Press *Enter*, and insert the file using *Insert→graphics*. The figure is now inserted. It may or may not show in LyX itself - that depends on the graphics rendering in your version of LyX. But it will show up in the compiled output.

Table 1: Cumulative error due to different split-step algorithms for an optical link of 100 Km. Algorithm 1 calculates the contribution from nonlinearity (NL) first, and then uses the result to compute the contribution from dispersion (D). Algorithm 2 calculates NL and D based on the original signal. Algorithm 3 computes NL for a half step, and then computes D and NL, each centered about the other, with a final half step of NL. Algorithm 4 computes D for a half step, and then computes NL and D, each centred about the other, with a final half step of D.

dz (Km)	ϵ_1	ϵ_2	ϵ_3	ϵ_4
10	1.824×10^{-8}	2.393×10^{-8}	2.589×10^{-12}	9.099×10^{-14}
20	7.17×10^{-8}	9.396×10^{-8}	4.150×10^{-11}	1.467×10^{-12}
30	1.341×10^{-7}	1.812×10^{-7}	2.052×10^{-10}	7.260×10^{-12}
40	2.137×10^{-7}	2.959×10^{-7}	6.111×10^{-10}	2.143×10^{-11}
50	4.206×10^{-7}	5.651×10^{-7}	1.643×10^{-9}	6.069×10^{-11}
60	4.229×10^{-7}	6.063×10^{-7}	2.662×10^{-9}	8.902×10^{-11}
70	4.930×10^{-7}	7.524×10^{-7}	5.306×10^{-9}	1.768×10^{-10}
80	6.545×10^{-7}	1.000×10^{-6}	1.033×10^{-8}	3.636×10^{-10}
90	9.507×10^{-7}	1.500×10^{-6}	1.813×10^{-8}	7.003×10^{-10}
100	1.500×10^{-6}	2.200×10^{-6}	2.830×10^{-8}	1.235×10^{-9}

Figure 1: Scaling of Error for different split-step algorithms. The points correspond to the data in Table 1. The lines correspond to best power-law fits as indicated in the legends. As can be seen, algorithms 1 and 2 scale as dz^2 , while algorithms 3 and 4 scale as dz^4 .

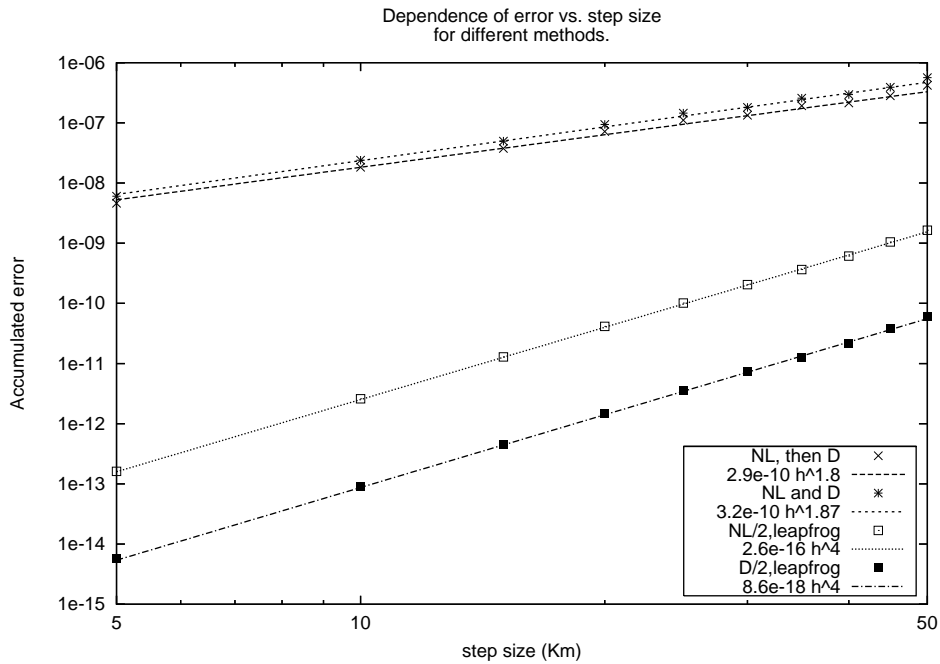

6.3 Typing in the Results and Discussion Section

Create Table 1 and Figure 1, and type in the text on page 11.

7 Creating the output

Having created the report, you need to compile and view it. That is done by *View*→*pdf* (or *Ctrl-x g*). LyX generates a *pdf* file, which can be viewed by *xpdf*. LyX automatically calls *xpdf* and shows you the output. Note that you can do this at any stage, not only at the end of report creation.

A printable version of the output can be obtained by *File*→*Export*→*postscript*. If you want to get *pdf* output instead, use *File*→*Export*→*pdf*.

8 Material for the Assignment

8.1 Abstract

This report presents a study of various split-step fourier methods applied to the problem of wave propagation down a dispersive, optical fibre. It is found that the algorithms that centre the dispersion and the nonlinearity computations about each other converge much better, i.e., the cumulative error scales as Δz^4 . Of such algorithms, the algorithm that takes a first half step (and last half step) of dispersion is found to be superior to the algorithm that starts and ends with nonlinearity half steps.

8.2 Introduction

This report presents four different algorithms to solve the following equation

$$\frac{\partial A}{\partial z} + i \frac{\partial^2 A}{\partial t^2} = |A|^2 A \quad (2)$$

which appears in the theory of optical waveguides. In this equation, z represents position in the “wave frame”, and both z and t have been scaled to eliminate the constants usually present. Here, A is the complex amplitude of the transverse Electric field of the wave.

Equation (2) is a nonlinear partial differential equation (PDE) of the hyperbolic, and is therefore difficult to solve. In the absence of the nonlinear term (the term on the right), Eq. (2) is a wave equation that can be solved by fourier methods. In the absence of the time derivative term, Eq. (2) reduces to an ordinary differential equation, though a nonlinear one. Such are easy to solve using a standard differential equation solver such as the fifth order, adaptive step, Runge Kutta solver.

To make progress, we consider solving the equation over a very small step in z . It is easy to show that the two terms are additive in their effect in this limit. That is to say, first solve the linear equation (which represents “dispersion”) from z to $z + dz$. Use that as initial condition and solve the nonlinear ODE from z to $z + dz$. In the limit of dz going to zero, this is equivalent to solving the full equation exactly.

In this study, we try four different ways of carrying out this approach:

1. Perform the following steps, using the result of each as the initial condition of the next.
 - (a) Solve the linear equation from z to

- $z + dz$.
- (b) Solve the nonlinear ODE from z to $z + dz$.
 - (c) Solve the linear equation from $z + dz$ to $z + 2dz$.
 - (d) etc.
2. Perform the following steps:
- (a) Solve the nonlinear ODE from z to $z + dz$. Save the result.
 - (b) Solve the linear equation from z to $z + dz$. Save the result.
 - (c) Average the results of (a) and (b) to obtain the initial condition for the next step.
 - (d) etc.
3. Perform the following steps, using the result of each as the initial condition of the next.
- (a) Take a step of $dz/2$ first, on which the nonlinear ODE is solved.
 - (b) Now solve the linear equation from z to $z + dz$.
 - (c) Solve the ODE from $z + dz/2$ to $z + 3dz/2$.
 - (d) Solve the linear equation from $z + dz$ to $z + 2dz$.
 - (e) etc.
 - (f) Solve the ODE from $L - dz/2$ to L .
4. Perform the following steps, using the result of each as the initial condition of the next.
- (a) Take a step of $dz/2$ first, on which the linear equation is solved.

- (b) Now solve the nonlinear ODE from z to $z + dz$.
- (c) Solve the linear equation from $z + dz/2$ to $z + 3dz/2$.
- (d) Solve the ODE from $z + dz$ to $z + 2dz$.
- (e) etc.
- (f) Solve the linear equation from $L - dz/2$ to L .

8.3 Results and Discussion

The four algorithms described in the Introduction were implemented in *C*. The simulation was carried out for a fixed length of waveguide, using different dz . As this particular choice of coefficients is theoretically tractable, the exact solution was also known.

Table 1 presents the error in each algorithm, for different dz values. Figure 1 presents the same data in a log-log plot. Each series was also fitted to a power law fit of the form

$$adz^b$$

and the corresponding best fit a and b were obtained. These are indicated in the legend in the figure.

All the algorithms performed better as dz is reduced. This was expected, since the algorithms are all exact in the limit of dz going to zero. It is clear from the results, however, that the first two algorithms are inferior in that the error improves slowly as dz is decreased. The third and fourth algorithms improved as dz^4 , while the first two improved only as dz^2 . This is a clear indication that the interleaving of nonlinearity and dispersion manages error in a much better fashion.

While both algorithms (3) and (4) scaled the same, there was a clear two orders of improvement in error when using algorithm (4).

The difference between the two algorithms is merely that the third algorithm uses a first and last half-step of nonlinearity, while the fourth algorithm uses a first and last half-step of dispersion. It is clear that the nonlinear term is a delicate term that is susceptible to error if it is carried out in a “non-centered” manner. Thus it always has to be sandwiched between dispersion computations.

To conclude, it is clear that not all split-step fourier methods are equal. Great care has to

be taken to implement the algorithm correctly. The reward is an enormous reduction in computational time. For example, if an accuracy of 10^{-12} is required, algorithms 1 and 2 would require extremely small steps of the order of 0.06 Km to hope to achieve the result. Algorithm 3 would require a step size of between 5 and 10 Km. But algorithm 4 would require a step size of 20 Km, thus reducing the computation by a further factor of 3.